


SHEET 1 OF 1





CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING

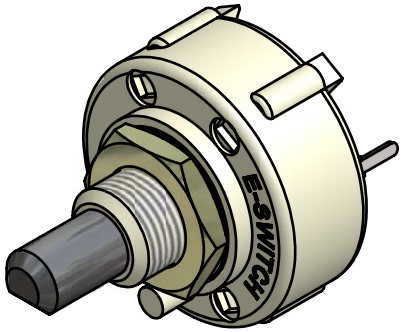


ISOMETERIC

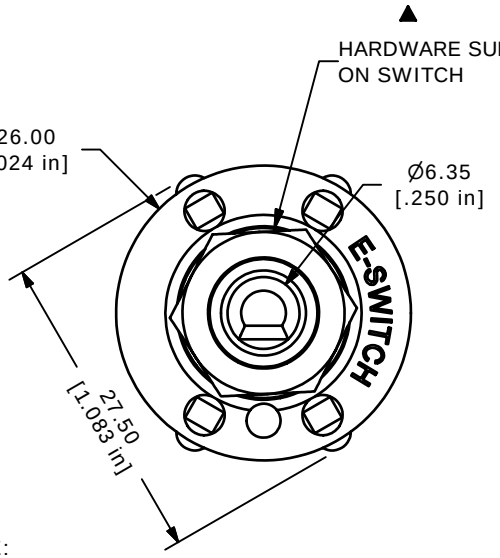

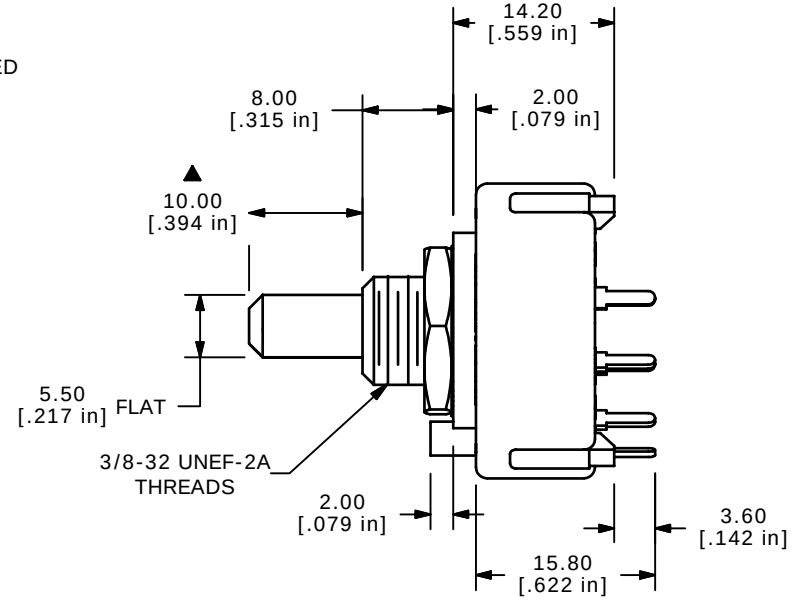

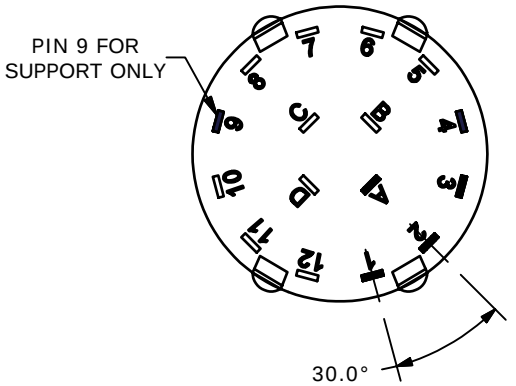

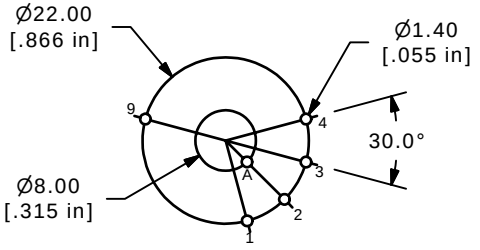

P.C. MOUNTING

NOTE:
1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
▲ 4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 150MILLIAMP, 250VAC/DC
350MILLIAMP, 110VAC/DC
6. CONTACT RATING (NON-SWITCHING) 5A
7. OPERATING FORCE 425± 100CM/STANDARD
8. OPERATING TEMP: -30˚C TO 85˚C
▲ 9. CIRCUIT SP: 4 POSITION 30˚ INDEX.
10. DIELECTRIC STRENGTH: 1000V RMS MIN.@ SEA LEVEL.
▲11. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT, STOP RING
12. ▲DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	15692	RELEASED FOR PRODUCTION	1/20/06	PH

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE KC14A10.001NPS

SCALE	DATE	DR	DWG	REV
1.5:1	1/20/2006	PH	G530166	A