# Connection distributor - QPD H 4X2,5 6-10 GY - 1582239

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)



QUICKON H-distributor, gray, 4-pos. without PE, 1.0 $mm^2$ ... 2.5 $mm^2$ / 630 V / 20 A, for cable diameters of 6 mm ... 10 mm, with a sealing bolt.

## Key commercial data

| | |
|---|---|
| Packing unit | 0 |
| Minimum order quantity | 1 |
| Catalog page | Page 94 (PC-2011) |
| GTIN | 4 046356 463386 |
| Custom tariff number | 85366990 |
| Country of origin | GERMANY |

## Technical data

### General characteristics

| | |
|---|---|
| Design | H-distributor |
| Color | gray |
| Connection method | QUICKON connection |
| Connection method | IDC connection |
| Number of positions | 4 |
| Wrench size, union nut | 22 mm |
| Tightening torque, union nut | 5 Nm |
| Number of connections | 4 |
| Conductor cross section stranded min. | 1.5 mm² |
| Conductor cross section stranded max. | 2.5 mm² |
| Conductor cross section solid min. | 1 mm² |
| Conductor cross section solid max. | 2.5 mm² |
| Conductor cross section AWG/kcmil min. | 16 |
| Conductor cross section AWG/kcmil max | 14 |

### Conductor data

| | |
|---|---|
| Structure of individual litz in acc. with VDE 0295 / smallest wire diameter | VDE 0295 class 1 to 6 / min. 0.15 mm |

# Connection distributor - QPD H 4X2,5 6-10 GY - 1582239

## Technical data

### Conductor data

| | |
|---|---|
| Wire insulation material | PVC / PE |
| Wire diameter including insulation | 2.5 mm ... 3.8 mm |
| External cable diameter | 6 mm ... 10 mm |

### Environmental conditions

| | |
|---|---|
| Degree of protection | IP68, 24 h / 2 m |
| Ambient temperature (operation) | -40 °C ... 80 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Temperature when conductor connected | -5 °C ... 50 °C |

### Electrical characteristics

| | |
|---|---|
| Nominal current $I_N$ | 20 A |
| Rated current | 20 A |
| Rated voltage (III/3) | 630 V |
| Rated voltage (III/2) | 1000 V |
| Rated voltage (II/2) | 1000 V |
| Rated surge voltage (III/3) | 6 kV |
| Rated surge voltage (III/2) | 8 kV |
| Rated surge voltage (II/2) | 8 kV |

### Mechanical characteristics

| | |
|---|---|
| QUICKON connectability | max. 10 |
| Insertion/withdrawal cycles | 50 (Quickon connections max. 10) |

### Material data

| | |
|---|---|
| Contact material | CuZn |
| Contact surface material | Tin-plated |
| Contact carrier material | PA |
| Insulating material | PA |
| Inflammability class according to UL 94 | V0 |
| Surge voltage category | III |
| Pollution degree | 3 |

## Classifications

### ETIM

| | |
|---|---|
| ETIM 3.0 | EC000516 |
| ETIM 4.0 | EC000516 |
| ETIM 5.0 | EC000516 |

### UNSPSC

| | |
|---|---|
| UNSPSC 11 | 39121522 |
| UNSPSC 12.01 | 39121522 |
| UNSPSC 13.2 | 39121522 |
| UNSPSC 6.01 | 30211923 |

# Connection distributor - QPD H 4X2,5 6-10 GY - 1582239

## Classifications

### UNSPSC

| | |
|---|---|
| UNSPSC 7.0901 | 39121522 |

### eCl@ss

| | |
|---|---|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |

## Approvals

### Approvals

Approvals

VDE Zeichengenehmigung / IECEE CB Scheme / GOST

Ex Approvals

Approvals submitted

### Approval details

VDE Zeichengenehmigung

| | |
|---|---|
| mm²/AWG/kcmil | 1.5-2.5 |
| Nominal current IN | 20 A |
| Nominal voltage UN | 690 V |

IECEE CB Scheme

| | |
|---|---|
| mm²/AWG/kcmil | 1-2.5 |
| Nominal current IN | 20 A |
| Nominal voltage UN | 690 V |

# Connection distributor - QPD H 4X2,5 6-10 GY - 1582239

## Approvals

GOST

## Accessories

### Accessories

### Plug/Adapter

Coding profile - CP-QPD - 1582459



Keying profile red, for pushing into the QUICKON dome and connector, can be positioned in 90° steps.

### Protection and sealing elements

Closing cap - SEALING PLUG 10X16 RD - 1400284



Closing cap, for closing unused bore holes in multiple seals and cable glands, diameter 10 mm

### Tools

Socket wrench - QSS 22 - 1670206



Allen wrench, for loosening and fastening the QUICKON union nut, WAF 22 mm

Assembly clip - QPD CLIP 2,5 BK - 1582235



Holding clip for Quickon-H distributor, for snapping on and removal without tools.

# Connection distributor - QPD H 4X2,5 6-10 GY - 1582239

## Accessories

Engraving material - GPE 13X 9 WH - 0806932



Engraving material, Sheet, white, Unlabeled, Can be labeled with: Gravur, Plotter, Mounting type: Adhesive, Lettering field: 13 x 9 mm

Protective cap - QPD QSK 2,5 FS - 1582488



Plastic protective cap, for QPD-QUICKON connectors, green, with holding band, IP68

Connectors - QPD P 4X2,5 6-10 GY - 1582372



QUICKON plug-in connector, gray, 4-pos. without PE, 1.0 mm² ... 2.5 mm²/630 V/20 A, for cables with a diameter of 6 mm ... 10 mm.


Connectors - QPD P 4X2,5 9-14 GY - 1582379




QUICKON plug-in connector, gray, 4-pos. without PE, 1.0 mm² ... 2.5 mm²/630 V/20 A, for cables with a diameter of 9 mm ... 14 mm.

## Drawings

Diagram

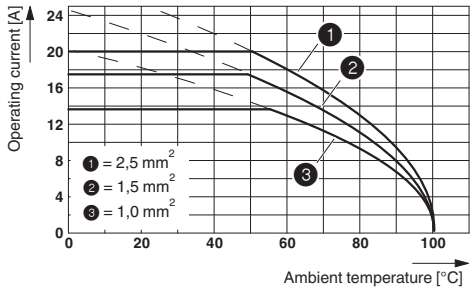



Dimensioned drawing

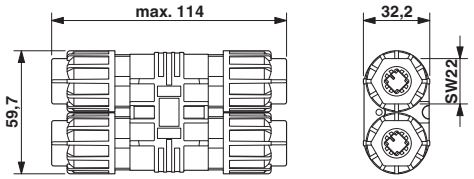

# Connection distributor - QPD H 4X2,5 6-10 GY - 1582239

Schematic diagram

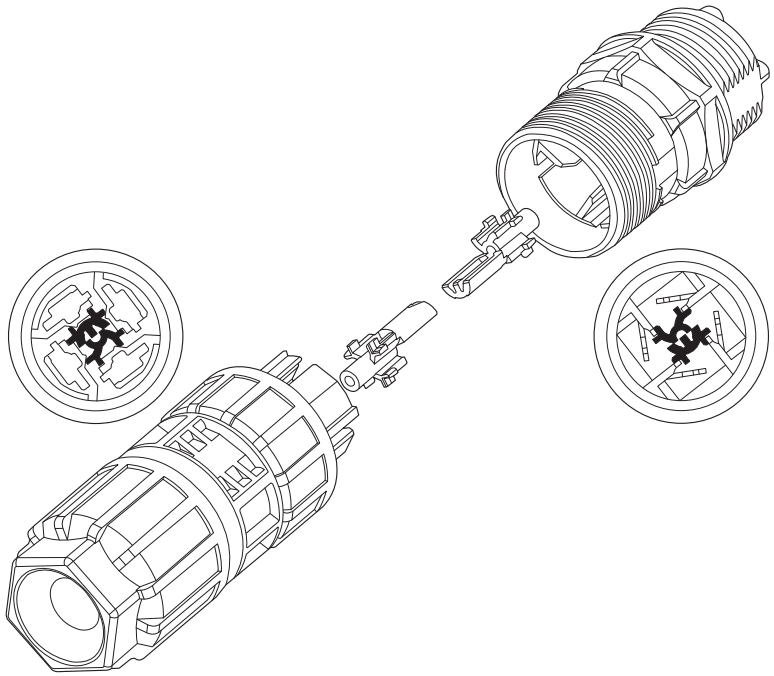

Keying of the QUICKON plug-in connection

© Phoenix Contact 2012 - all rights reserved
http://www.phoenixcontact.com