

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0026481122

Status:

Active

Description:

3.96mm (.156") Pitch KK® Header, Breakaway, Right Angle, 12 Circuits, Tin (Sn) Plating

Documents:

3D Model

Drawing (PDF)

Packaging Specification (PDF)

Product Specification PS-08-50 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

41662

Application

Board-to-Board, Wire-to-Board

Product Name

KK®

Physical

Breakaway

Yes

Circuits (Loaded)

12

Circuits (maximum)

12

Color - Resin

Black

Durability (mating cycles max)

25

First Mate / Last Break

No

Flammability

94V-0

Glow-Wire Compliant

No

Guide to Mating Part

No

Keying to Mating Part

None

Lock to Mating Part

None

Material - Metal

Brass

Material - Plating Mating

Tin

Material - Resin

Polyester

Number of Rows

1

Orientation

Right Angle

PC Tail Length (in)

0.184 In

PC Tail Length (mm)

4.67 mm

PCB Locator

No

PCB Retention

None

PCB Thickness Recommended (in)

0.062 In

PCB Thickness Recommended (mm)

1.60 mm

Packaging Type

Bag

Pitch - Mating Interface (in)

0.156 In

Pitch - Mating Interface (mm)

3.96 mm

Polarized to Mating Part

Yes

Polarized to PCB

No

Shrouded

Partial

Stackable

No

Temperature Range - Operating

0°C to +75°C

Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

7A

Voltage - Maximum

250V




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

41662Series

Mates With

2139 , 2145 , 6442 , 7674 , 7675 , 41695 , 41815

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235

Material Info

Old Part Number	A-41662-A12A102
-----------------	-----------------

Reference - Drawing Numbers

Product Specification	PS-08-50
Sales Drawing	SD-41662-001



This document was generated on 03/22/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



A-41662-* N * * - *
PACKAGING AND OPTIONS
NO. OF CKTS.
PIN DIMENSIONS
PLATING

VOID LOCATIONS:
BLANK = NO VOIDS
NO.= CKT NO. VOIDED
MULT. VOIDS START
WITH 51

CENTERLINE OF PIN IN AREA SHOWN
NOT TO VARY FROM CENTERLINE OF
PIN AT DATUM Z BY MORE THAN
0.20/.008 IN ANY DIRECTION.

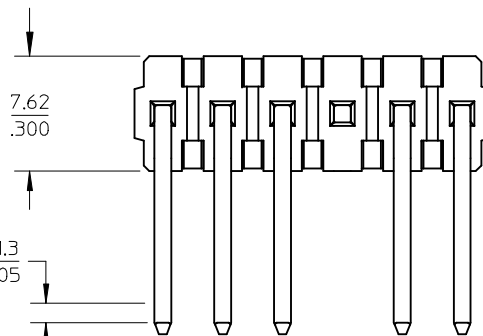

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS:
(1.57±.18)/.062±.007

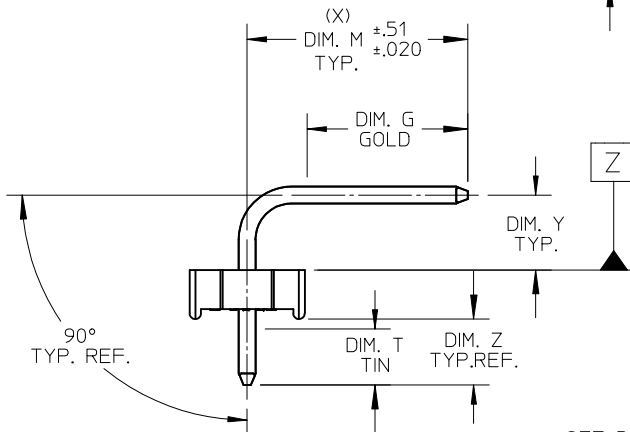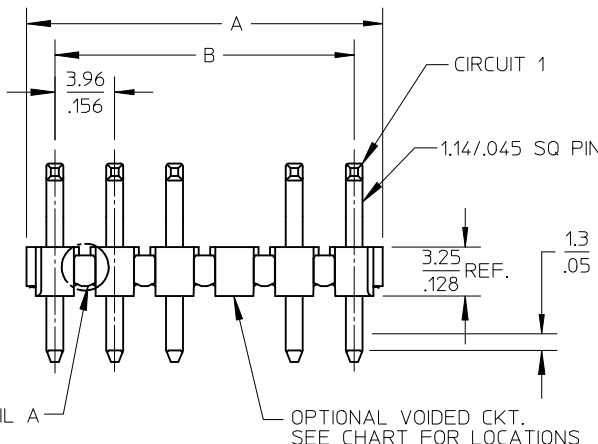

1.3/.05 CENTERLINE OF PIN IN AREA SHOWN
NOT TO VARY FROM CENTERLINE OF
PIN AT DATUM Z BY MORE THAN
0.13/.005 IN ANY DIRECTION.


NOTES:

1. MATERIAL: GLASS FILLED POLYESTER, 94V-0, MOLDED BLACK
2. FINISH: PER SDES-88
 - (102) OVERALL TIN: 0.00508/.000200 MIN.
 - OVERALL COPPER UNDERPLATE: 0.00254/.000100 MIN.
 - (154) OVERALL TIN: 0.00254/.000100 MIN.
 - OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
 - (208) SELECT GOLD: 0.00038/.000015 MIN.
 - * SELECT TIN: 0.00254/.000100 MIN
 - OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
 - (228) SELECT GOLD: 0.00076/.000030 MIN.
 - * SELECT TIN: 0.00254/.000100 MIN.
 - OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
 - (501) OVERALL GOLD: 0.00051/.000020 MIN.
 - OVERALL NICKEL UNDERPLATE: 0.00076/.000030 MIN.

3. PRODUCT SPECIFICATION: PS-08-50.
4. PACKAGING INFORMATION: SEE CHARTS
5. SOLDERABILITY: PER SMES-152.
6. PIN PUSH-OUT FORCE: PRIOR TO SOLDERING, A 3 LB. MINIMUM FORCE (IN EITHER DIRECTION) SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
7. PARTS ARE STACKABLE END TO END ON 3.96/.156 CENTERS. (SPACING TABS MUST BE REMOVED ON CIRCUIT SIZES 1-23 BEFORE PARTS ARE STACKABLE.)
- *8. THE PRIMARY SHIPPING CARTON WILL BE LABELED, "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.
9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

CIRCUIT	B	A
2	3.96 .156	6.78/7.87 .267/.310
3	7.92 .312	10.74/11.84 .423/.466
4	11.89 .468	14.71/15.80 .579/.622
5	15.85 .624	18.67/19.76 .735/.778
6	19.81 .780	22.63/23.72 .891/.934
7	23.77 .936	26.59/27.69 1.047/1.090
8	27.74 1.092	30.56/31.65 1.203/1.246
9	31.70 1.248	34.52/35.61 1.359/1.402
10	35.66 1.404	38.48/39.57 1.515/1.558
11	39.62 1.560	42.44/43.54 1.671/1.714
12	43.59 1.716	46.41/47.50 1.827/1.870
13	47.55 1.872	50.37/51.46 1.983/2.026
14	51.51 2.028	54.33/55.42 2.139/2.182
15	55.47 2.184	58.29/59.39 2.295/2.338
16	59.44 2.340	62.26/63.35 2.451/2.494
17	63.40 2.496	66.22/67.31 2.607/2.650
18	67.36 2.652	70.18/71.27 2.763/2.806
19	71.32 2.808	74.14/75.23 2.919/2.962
20	75.29 2.964	78.11/79.20 3.075/3.118
21	79.25 3.120	82.07/83.16 3.231/3.274
22	83.21 3.276	86.03/87.12 3.387/3.430
23	87.17 3.432	89.94/91.08 3.541/3.586
24	91.14 3.588	93.85/95.00 3.695/3.740

2-*	AH7
1	
SHT.	REV.



REMOVE 41662-0684 EC NO: UCP2010-0149 DRWN:MKLIPPER CHKD:SSOUSEK APPR:FSM TH	2009/08/05	2009/08/10	2009/08/11
	DESCRIPTION		
	REV		
	AH7		

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.36	± ---
ANGULAR ±1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM/IN	
DRAWN BY	DATE
JSCHAFFER	2003/09/15
CHECKED BY	DATE
KSAMIEC	2003/09/15
APPROVED BY	DATE
MARGULIS	2003/09/15
MATERIAL NO.	
SEE CHART	
SIZE	
A	

SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
TITLE KK .156 HEADER ASSEMBLY FLAT BREAKAWAY 2-24 CKTS.		
 MOLEX INCORPORATED		
DOCUMENT NO. SD-41662-001		SHEET NO. 1 OF 12
THIS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		