

LP30MHz-1551


Applications

For Digital Studio

Specifications

LP30MHz-1551	
Zin/Zout	75 ohm (Unbaranced)
Insertion Loss	3.5dB max (at 1MHz)
Pass Band Ripple	0.1dB p-p max (0.1 up to 30MHz)
Attenuation	12dB min (at 37.125MHz)
	40dB min (44.25 up to 54.25MHz)
	50dB min (54.25 up to 100MHz)
Group Delay	146+/-10ns max (at 1MHz)
	2.0nsp-p max (0.1 up to 20MHz)
	3.0nsp-p max (0.1 up to 30MHz)

Dimensions

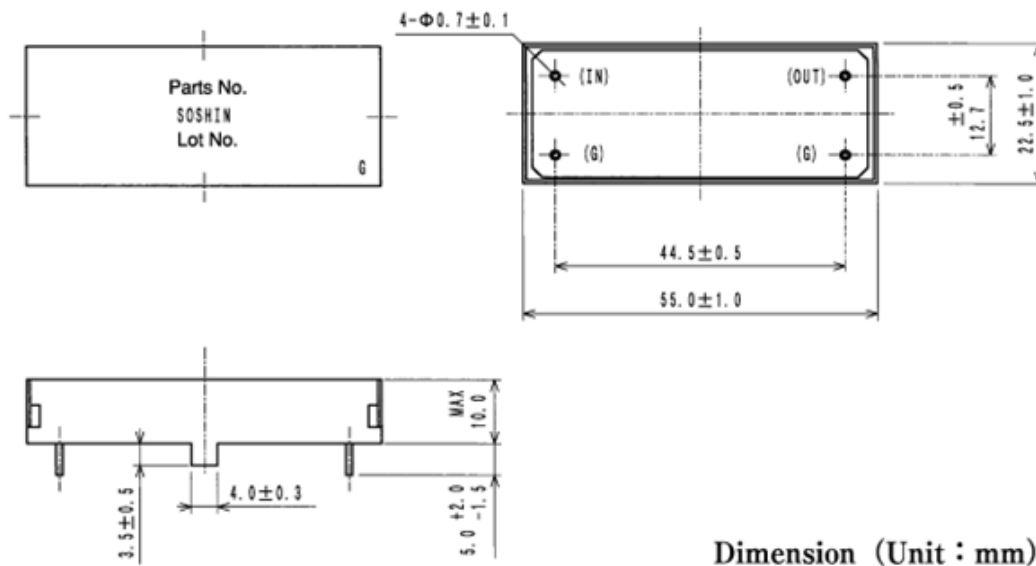

Dimension (Unit : mm)

Characteristics (Typical)

