


## NPN Silicon Epitaxial Planar Transistor

for AM/FM amplifier and local oscillator of FM/VHF tuner applications.

The transistor is subdivided into six groups, D, E, F, G, H and I, according to its DC current gain.

On special request, these transistors can be manufactured in different pin configurations.




1. Emitter 2. Base 3. Collector  
TO-92 Plastic Package

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Base Voltage	$V_{CBO}$	30	V
Collector Emitter Voltage	$V_{CEO}$	15	V
Emitter Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	50	mA
Power Dissipation	$P_{tot}$	400	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5\text{ V}$ , $I_C = 1\text{ mA}$ Current Gain Group	D $h_{FE}$	28	-	45	-
	E $h_{FE}$	39	-	60	-
	F $h_{FE}$	54	-	80	-
	G $h_{FE}$	72	-	108	-
	H $h_{FE}$	97	-	146	-
	I $h_{FE}$	132	-	198	-
Collector Cutoff Current at $V_{CB} = 12\text{ V}$	$I_{CBO}$	-	-	50	nA
Collector Base Breakdown Voltage at $I_C = 100\text{ }\mu\text{A}$	$V_{(BR)CBO}$	30	-	-	V
Collector Emitter Breakdown Voltage at $I_C = 1\text{ mA}$	$V_{(BR)CEO}$	15	-	-	V
Emitter Base Breakdown Voltage at $I_E = 100\text{ }\mu\text{A}$	$V_{(BR)EBO}$	5	-	-	V
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$	$V_{CE(sat)}$	-	-	0.5	V
Collector Base Capacitance at $V_{CB} = 10\text{ V}$ , $f = 1\text{ MHz}$	$C_{cbo}$	-	1.3	1.7	pF
Gain Bandwidth Product at $V_{CE} = 5\text{ V}$ , $I_C = 5\text{ mA}$	$f_T$	700	1100	-	MHz



**SEMTECH ELECTRONICS LTD.**



ISO 9001 : 2008  
Certificate No. 180713000



ISO 14001 : 2004  
Certificate No. 90719410



ISO 9001 : 2008  
Certificate No. 90719410




BS-OHSAS 18001 : 2007  
Certificate No. 7116




IECQ QC 080000  
Certificate No. PRC-HSPM-1483


STATIC CHARACTERISTIC

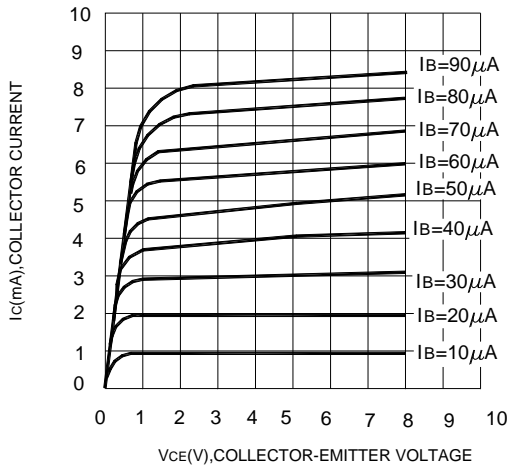


DC CURRENT GAIN

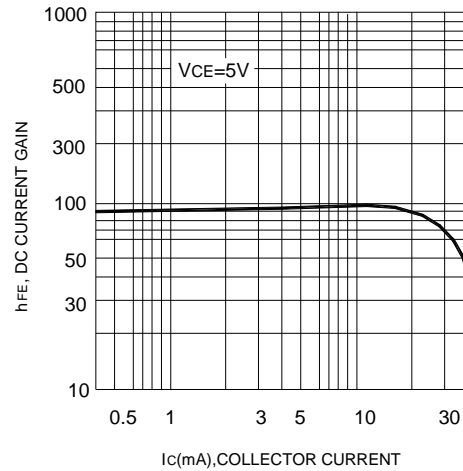



CURRENT GAIN-BANDWIDTH PRODUCT

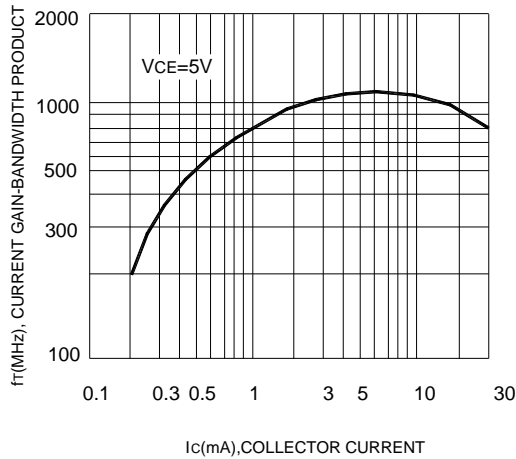

BASE-EMITTER SATURATION VOLTAGE  
COLLECTOR-EMITTER SATURATION VOLTAGE

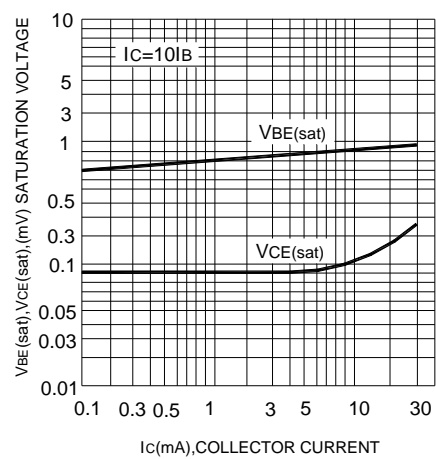

OUTPUT CAPACITANCE

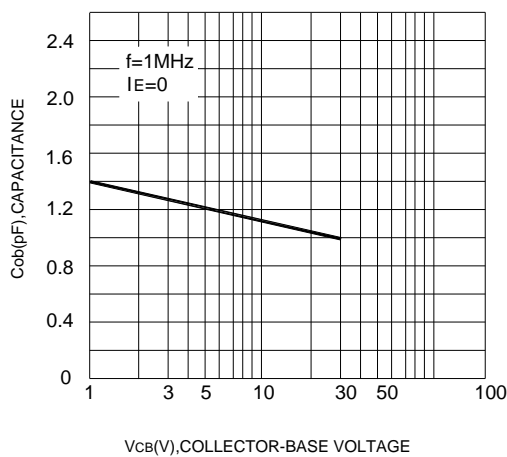

SEMTECH ELECTRONICS LTD.

