



M/A-COM

ISO 9001
CERTIFIED

E-Series HMIC Double Balanced Mixer

1400 - 2000 MHz

EMD40-1800H



Features

- * SOIC-8 package
- * IC process
- * Low profile
- * LO Drive +13dBm to +17dBm

Description

M/A-COM's EMD40-1800H is a passive double balanced mixer in a low cost, surface mount SOIC-8 package. Fabricated using a mature silicon process (HMIC), it is ideally suited for high volume cellular and wireless applications. Typical applications include frequency up/down conversion, modulation and demodulation in JDC (1500MHz), DCS (1800mhz), PHS (1900MHz) and PCS (1900MHz).

Schematic

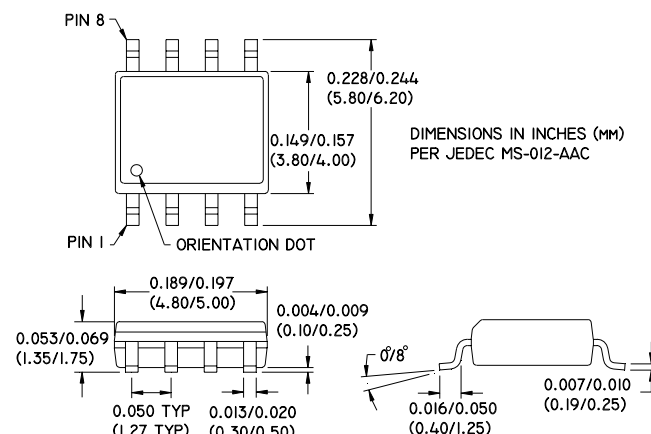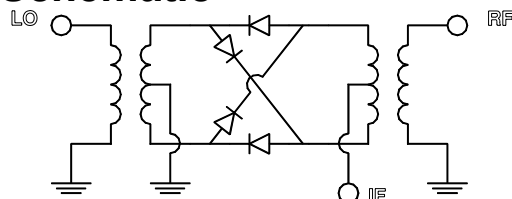

Pin Configuration

Pin	Function	Pin	Function
1	GND	5	LO
2	IF	6	GND
3	GND	7	GND
4	GND	8	RF

Ordering Information

Part Number	Packaging
EMD40-1800H	Tube
EMD40-1800HTR	Tape and Reel

Specifications @ 25°C

Frequency Range		1400 - 2000 MHz	
Conversion Loss		Maximum	Mean (x)
1400 - 1700 MHz		8.1 dB	6.76 dB
1700 - 2000 MHz		9.5 dB	7.86 dB
L - R Isolation		Minimum	Typical
1400 - 1700 MHz		28.0 dB	33.0 dB
1700 - 2000 MHz		26.0 dB	28.5 dB
L - I Isolation		Minimum	Typical
1400 - 1700 MHz		24.0 dB	26.9 dB
1700 - 2000 MHz		24.0 dB	26.8 dB
LO VSWR		Maximum	Typical
1400 - 1700 MHz		4.50	3.85
1700 - 2000 MHz		4.00	3.36
RF VSWR		Maximum	Typical
1400 - 1700 MHz		3.50	1.92
1700 - 2000 MHz		2.40	1.52
IF VSWR		Maximum	Typical
DC - 400 MHz		1.80	1.40
Input IP3		Minimum	Typical
1400 - 1700 MHz		11.5 dBm	15.0 dBm
1700 - 2000 MHz		12.0 dBm	20.0 dBm
IF 1.0 dB Bandwidth		DC - 500MHz	
Input 1dB Compression		+7.0 dBm	

Test conditions: LO drive = +17dBm, IF frequency = 60MHz. Mean and sigma calculated at 1500MHz and 1800MHz. S1230B


Specifications Subject to Change Without Notice




Typical Performance

Over Extended Bandwidth (1100MHz - 2500MHz)


Conversion Loss

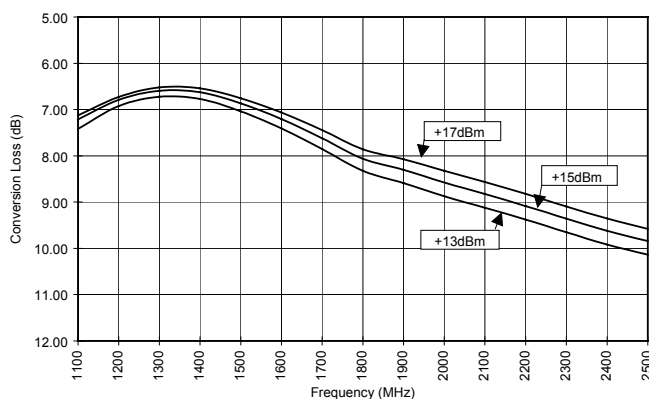


Isolation

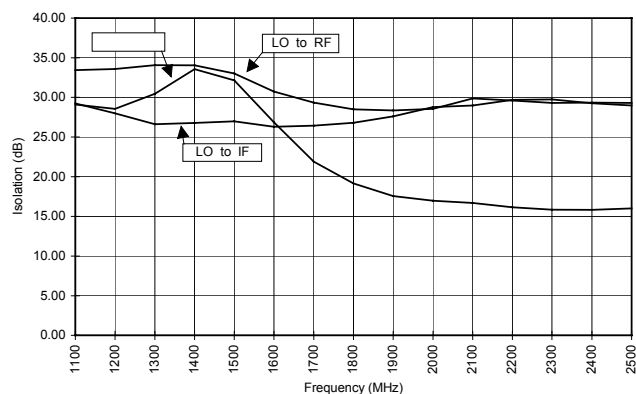

VSWR

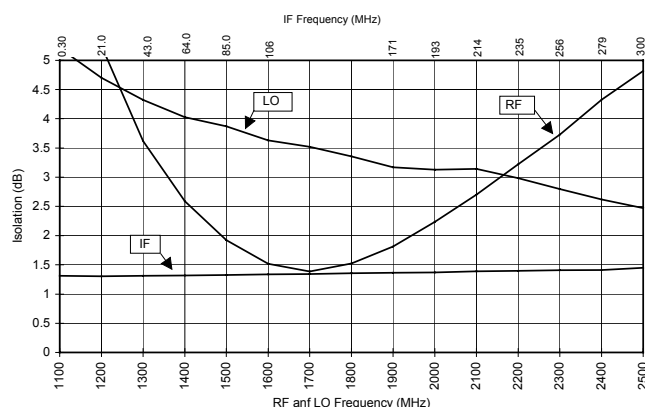

IP3 and 1dB Compression

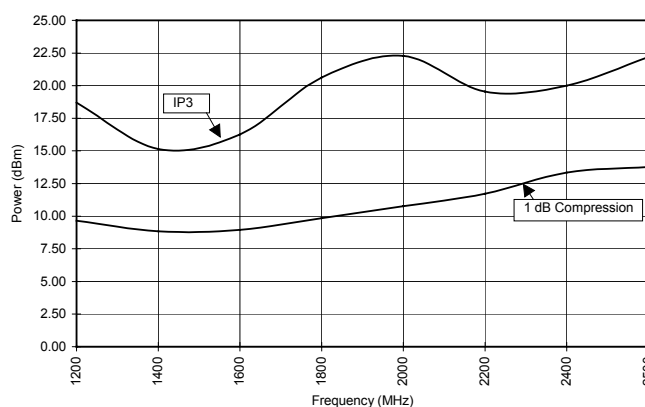

Note: Conversion loss measured with fixed IF frequency of 60MHz. All measurements made with input power of +17dBm.

Spurious Table

(In dBc below IF, assuming down conversion)

		nf _{LO} + mf _{RF}					nf _{LO} - mf _{RF}				
RF (n)	0	X	4	7	2	38	X	4	6	2	38
	1	11	0	30	32	42	11	0	27	12	30
	2	57	47	66	50	52	57	44	58	44	60
	3	64	73	66	60	70	64	56	65	60	70
	4	89	88	81	82	88	90	81	85	80	87
		0	1	2	3	4	0	1	2	3	4
LO (m)											

LO (m)

RF = 1842.5 MHz, -5dBm

LO = 1772.5 MHz, +17dBm

S 1230B

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+27dBm
LO Drive Power	+27dBm
Operating/Storage Temp.	-40°C to +85°C

Specifications Subject to Change Without Notice