

TEMPERATURE SENSOR IC

FEATURES

- Linear Output Voltage 5 mV/°C Output
- 2.4 to 10.0 V Supply Range
- Miniature Package (SOT-25)
- Minimum External Parts Count
- Low Power Consumption

APPLICATIONS

- Home and Industrial Thermostats
- Automotive Climate Control
- Battery Charger Temperature Monitor
- Notebook Computer Temperature Monitor
- Electronic Thermometers
- Fish Finder Water Temperature
- Industrial Process Controllers
- Home Appliance Temperature Control

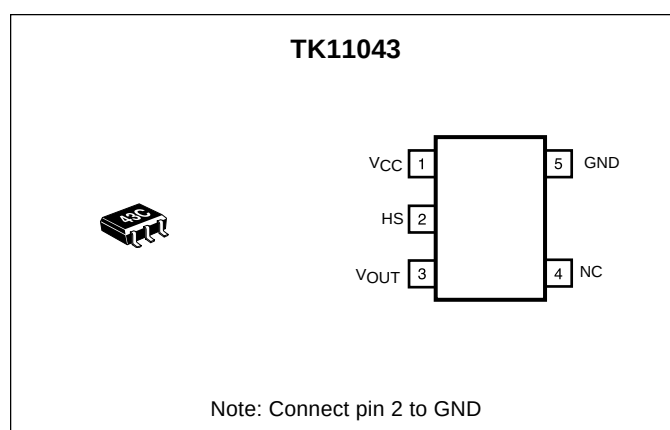
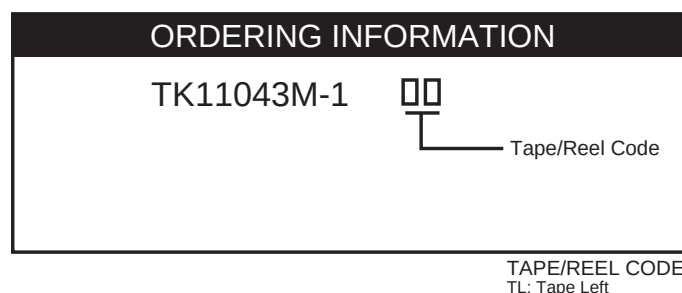
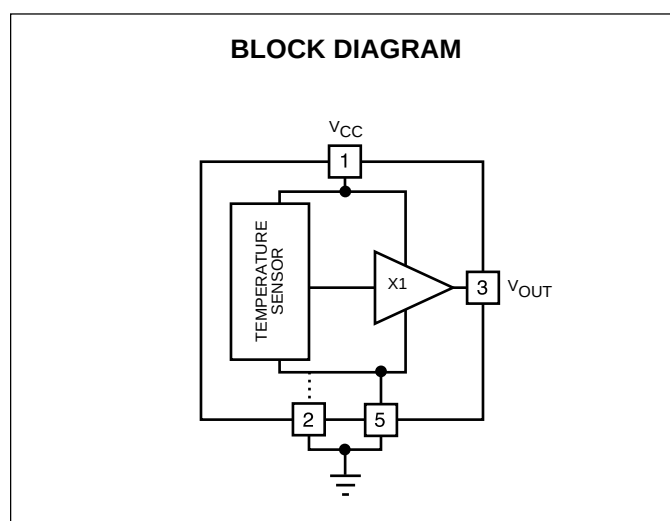
DESCRIPTION

The TK11043 is a temperature sensor IC with a linear output of 5 mV/°C over the range of -30 to +105 °C. Its wide operating voltage range of 2.4 to 10.0 V makes it suitable for a number of applications requiring accurate temperature control, such as electronic thermostats for climate control, refrigerators, and industrial process controls.

A typical application is to make a digital representation of temperature with an A/D converter, or to make a thermal detector with a comparator.

The TK11043 has a compensation pin for a 0.1 μF capacitor that ensures stability over the IC's operating temperature range.

The TK11043 is available in a miniature SOT-25 surface mount package.



ABSOLUTE MAXIMUM RATINGS

Supply Voltage	12 V	Storage Temperature Range	-55 to +150 °C
Operating Voltage	2.4 to 10 V	Operating Temperature Range	-30 to +105 °C
Power Dissipation (Note 1)	150 mW	Lead Soldering Temperature (10 s)	235 °C
Junction Temperature	150 °C		

TK11043 ELECTRICAL CHARACTERISTICS

Test Conditions: $V_{CC} = 3.0\text{ V}$, $I_{OUT} = 0\text{ }\mu\text{A}$, $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{OUT}	Output Voltage	$T_A = 25\text{ }^\circ\text{C}$	1.487	1.502	1.517	V
		$T_A = 85\text{ }^\circ\text{C}$	1.784	1.804	1.824	V
		$T_A = -30\text{ }^\circ\text{C}$		1.225		V
T_C	Temperature Coefficient	$T_A = 25\text{ }^\circ\text{C}$ to $85\text{ }^\circ\text{C}$	4.50	5.04	5.50	mV/°C
Line Reg	Line Regulation	$V_{CC} = 3$ to 10 V	-12	2	12	mV
Load Reg	Load Regulation	$I_{OUT} = 0$ to $100\text{ }\mu\text{A}$	0	2	12	mV
I_{CC}	Supply Current	$T_A = 25\text{ }^\circ\text{C}$		110	180	μA
I_{OUT}	Output Current	$\Delta V_{OUT} \leq 15\text{ mV}$			400	μA

Note 1: Power dissipation is 150 mW when mounted as recommended. Derate at 1.2 mW/°C for operation above 25 °C.

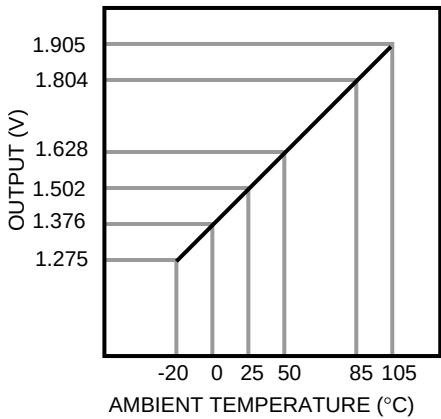
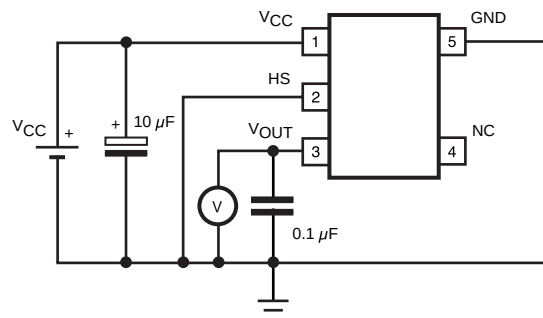


FIGURE 1. OUTPUT CHARACTERISTICS

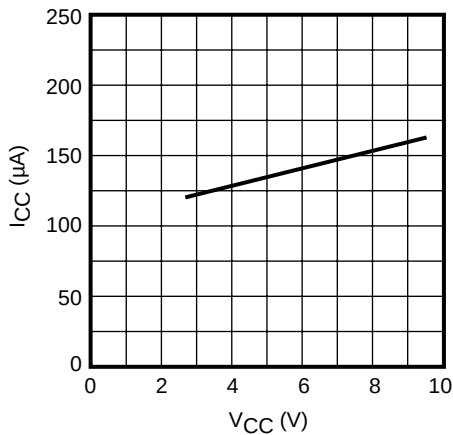
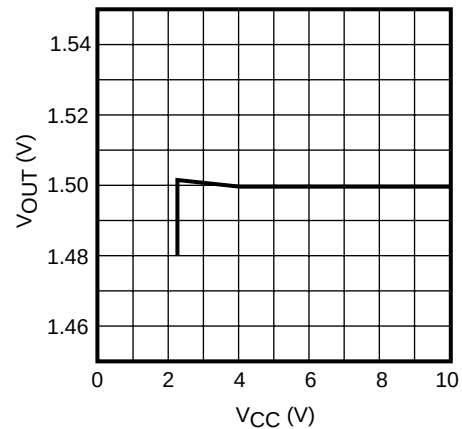
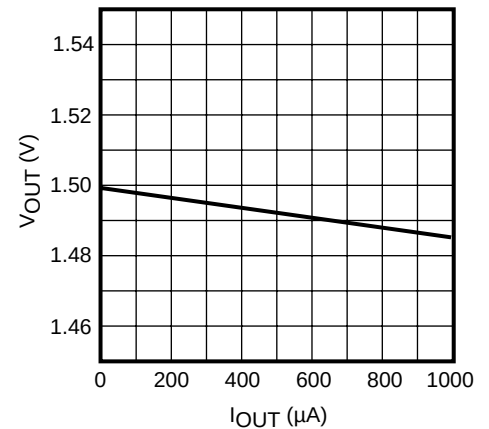
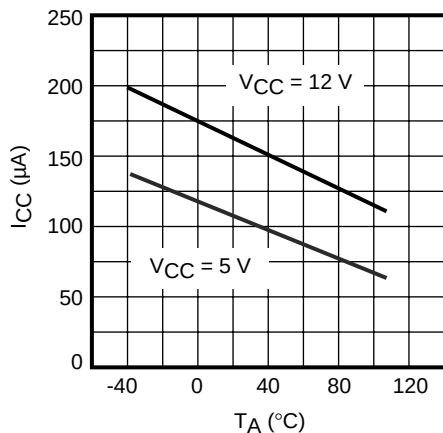
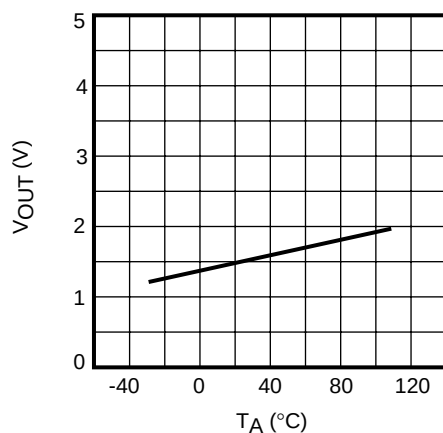
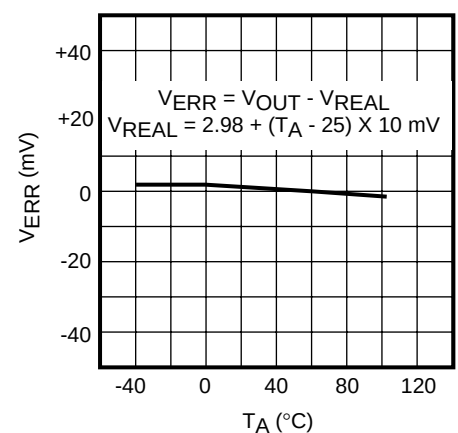
TEST CIRCUIT




Note: Connect pin 2 to ground

TYPICAL PERFORMANCE CHARACTERISTICS

$V_{CC} = 3\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

SUPPLY CURRENT vs.
SUPPLY VOLTAGEOUTPUT VOLTAGE vs.
SUPPLY VOLTAGEOUTPUT VOLTAGE vs.
OUTPUT CURRENTSUPPLY CURRENT vs.
TEMPERATUREOUTPUT VOLTAGE vs.
TEMPERATURELINEARITY ERROR vs.
TEMPERATURE

[illegible]

Visit our Internet site at <http://www.tokoam.com>

Printed in the USA