
Electrical Specifications at 25° C


Part Number	Insertion Insertion Loss (dB MAX)	Return Loss (Typ) in MHz			Crosstalk (dB MIN)			Differential to Common Mode Rejection (dB MIN)			Turns Rato		Hipot (Vrms Min.)
	0.1-100MHz	50MHz	60MHz	80MHz	30MHz	60MHz	100MHz	30MHz	50MHz	100MHz	TX	RX	
T-17009	1.1	-20	-14	-11.5	-45	-40	-35	-42	-37	-33	1:1	1:1	1500

- Meets all IEE 802.3 and ANSI X3.263 standards including 350 µH OCL with 8 mA bias
- Mil. Grade Epoxy encapsulated package withstands 235°C IR reflow
- Tape and Reel available.

Schematic Diagram

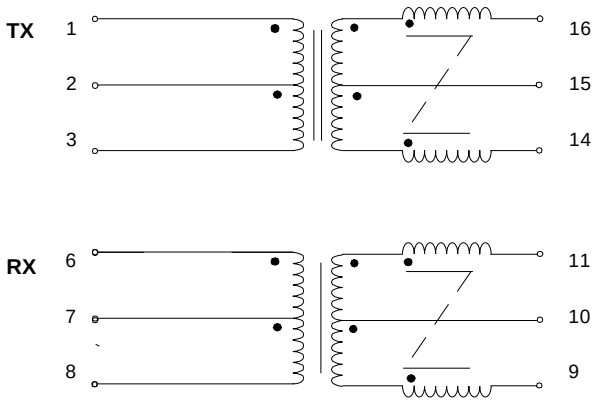

Dimensions in inches (mm)
(Unused Pin 4 is omitted)

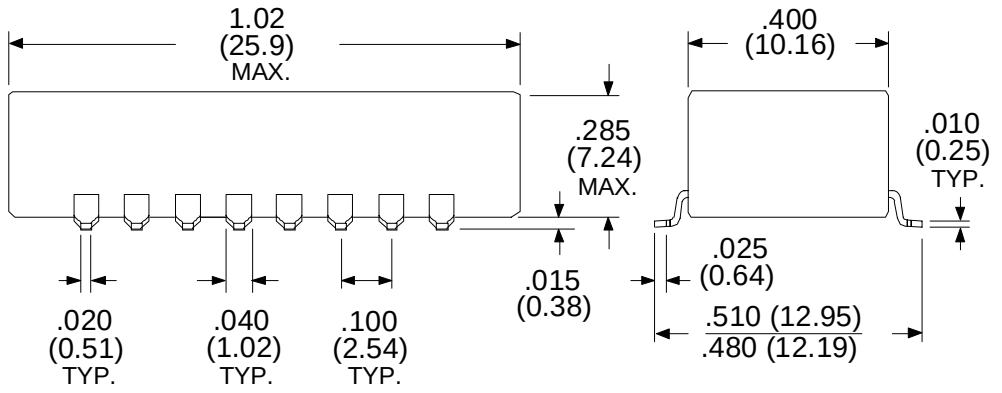

RHOMBUS P/N: **T-17009**	
CUST P/N:	NAME: