
Model(型號): RKJXK3002

► Download PDF file

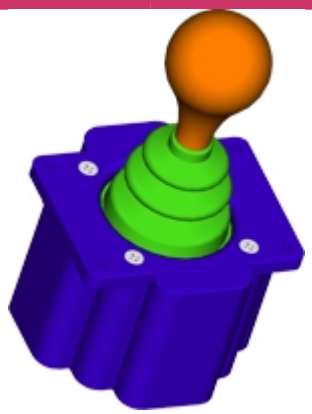


Features:(特點):

Most miniaturized series in our joystick controllers.3-dimensional coordinate type is also available. Spring return device is incorporated inside and it activates an operating lever to automatically return to center position.


Applications(作用):


Various kinds of measuring devices, electromotive wheelchairs, robot operations ,precision machine tools ,etc. crane operations , industrial vehicles ,civil engineering and construction machinery ,etc.


Dimensions(規格圖):

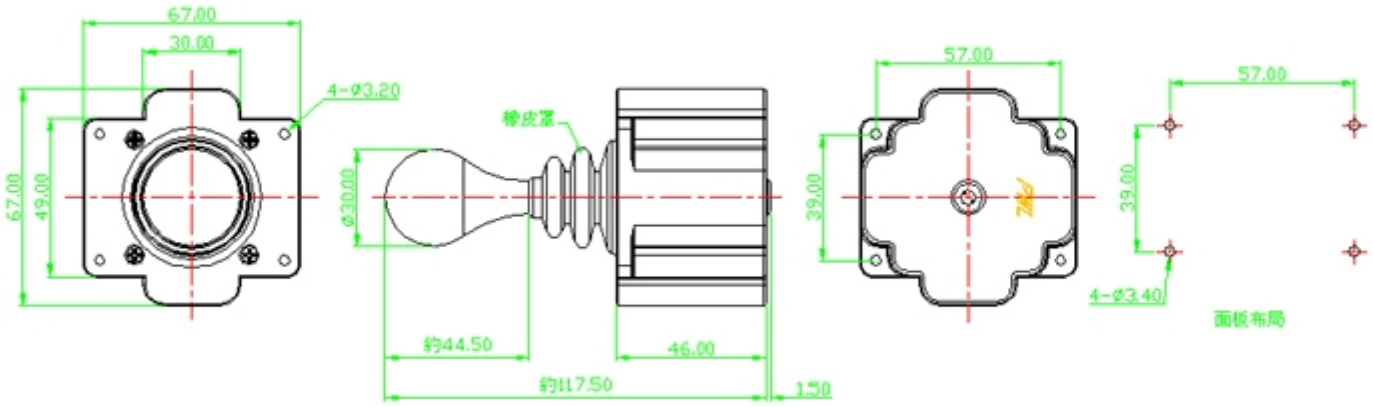



Type of Lever(搖柄規格圖):

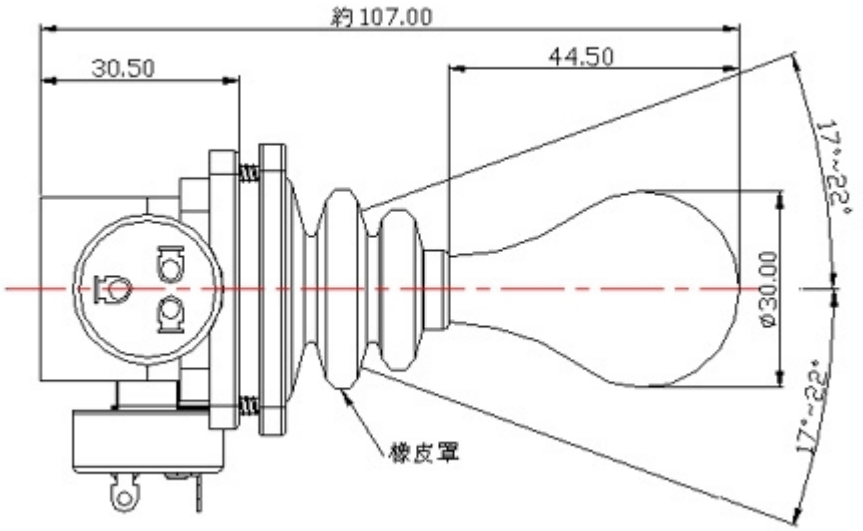


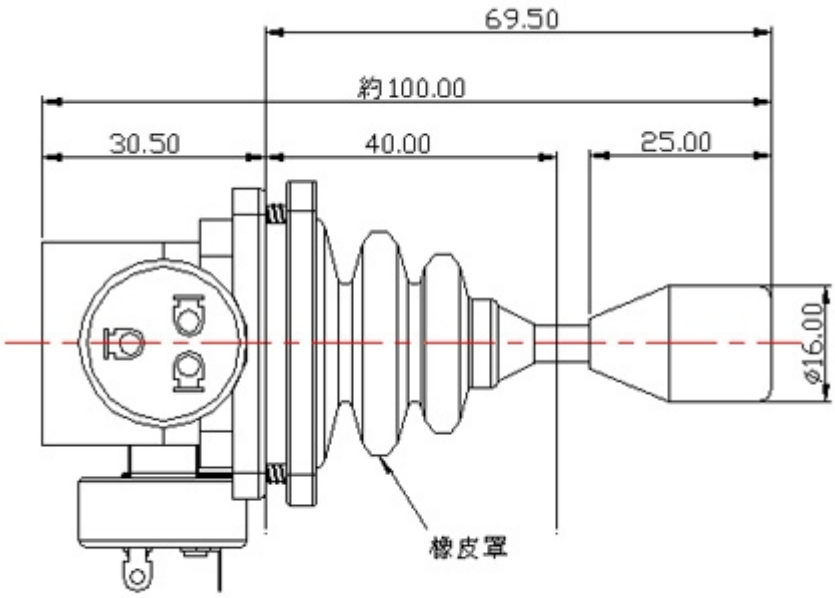
69.50
約100.00
30.50
40.00
25.00
ø16.00
橡皮罩

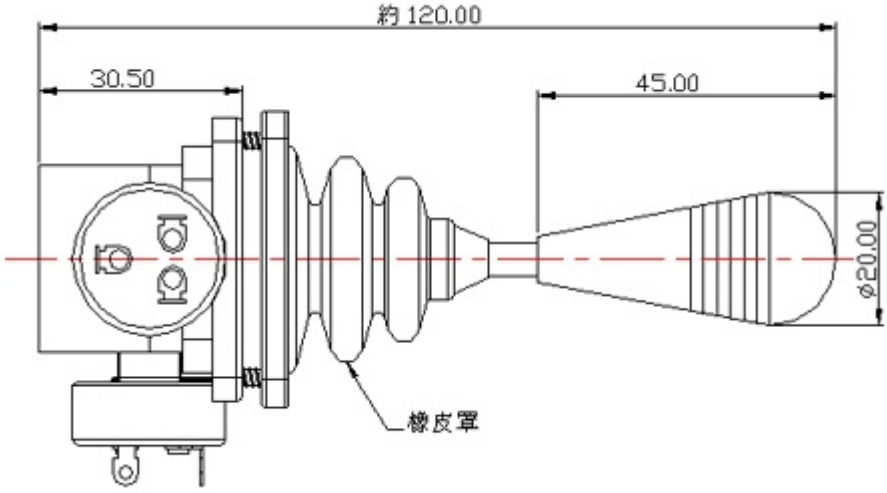
約 120.00
30.50
45.00
ø20.00
橡皮罩

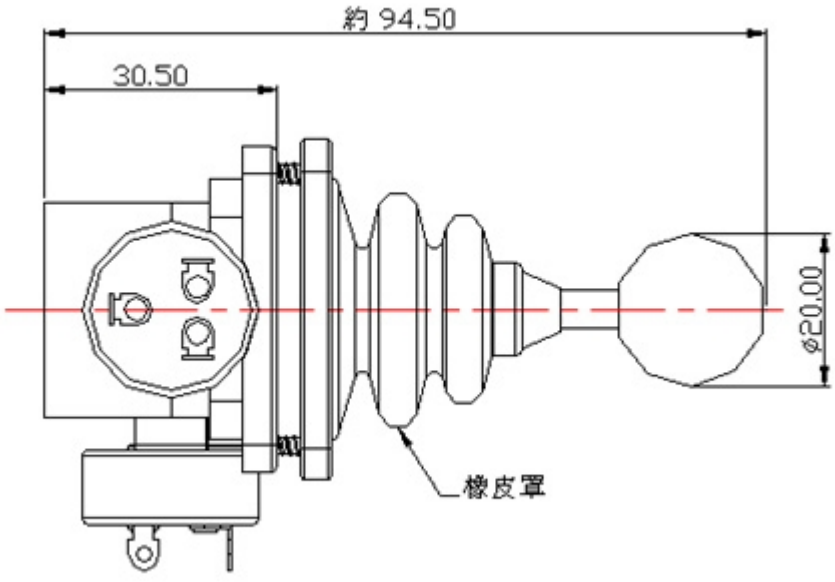
約 94.50
30.50
ø20.00
橡皮罩

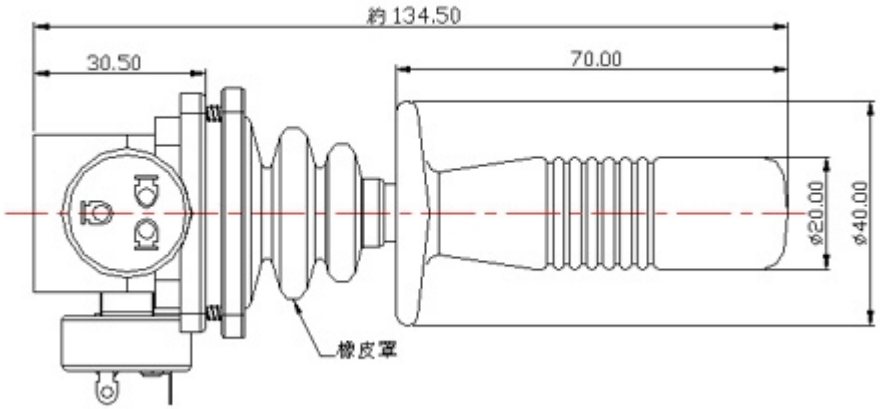

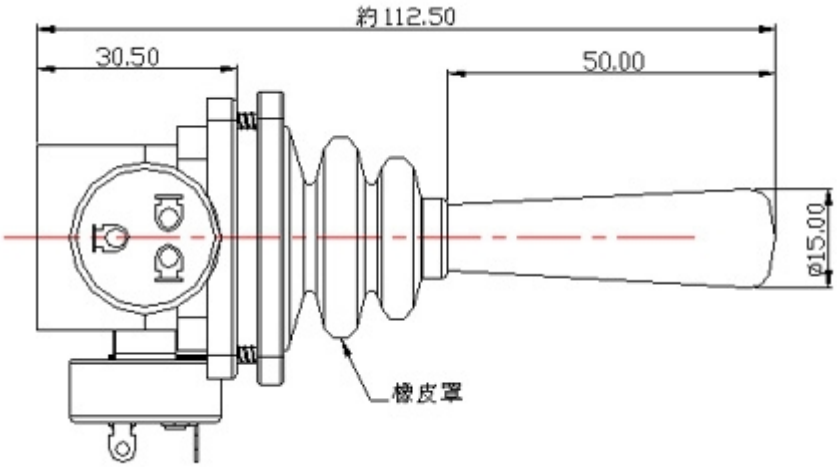

Specifications(規格)

Electrical Characteristics [電氣性能]	
Total resistance [全阻抗值]	10KΩ±20%/5KΩ±10%
Total resistance tolerance [全阻抗值容許差]	±30%
Ratings power(w) [額定功率]	0.1W/1W
Resistance taper [阻抗變化特性]	B
Residual resistance [殘留阻值]	全阻值 3%Ω Max.
Sliding noise [滑動雜音]	300mV Max
Insulation resistance [絕緣阻抗]	>500MΩ (250V.D.C.)
Withstanding voltage [耐電壓]	1 minute at AC 250V
Max. operating voltage [最高使用電壓]	AC 50V
Mechanical Characteristics [机械性能]	
Operation torque [回轉力矩]	150~200gf.cm
Rotation stopper strength [止動強度]	3Kgf.cm Min
Switch Travel [開關移動量]	0.5 mm
Endurance Characteristics [耐久性能]	
Rotational life [回轉壽命]	More than 1,000,000 cycles

Http://www.productwell.com E-Mail: pwltw@productwell.com TEL: 0769-81353212 FAX: 0769-81353211