



SHEET 1 OF 1

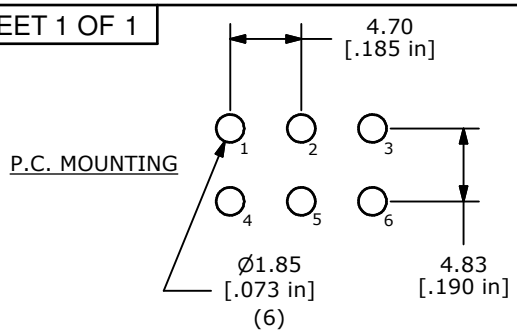

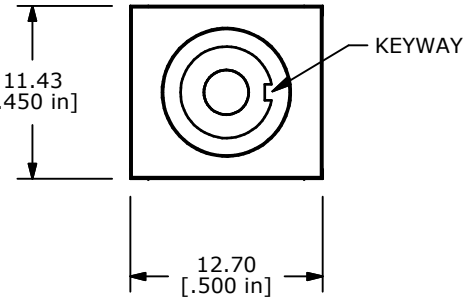

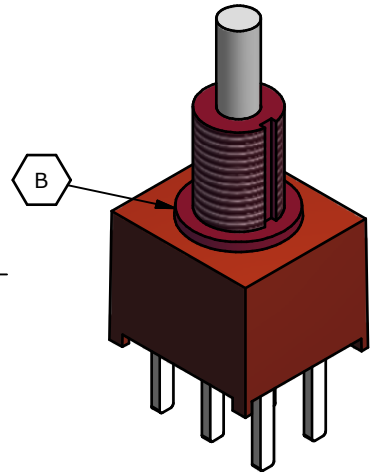


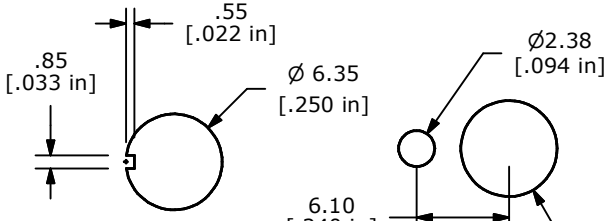


Without Locking Ring

PANEL MOUNTING


With Standard Locking Ring

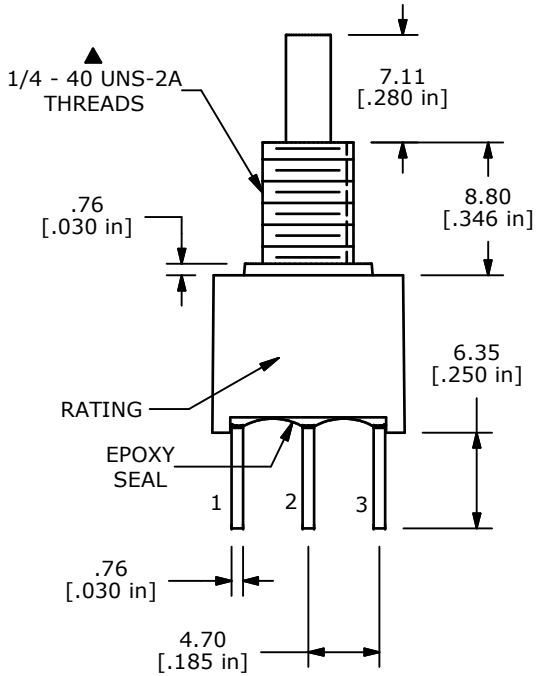

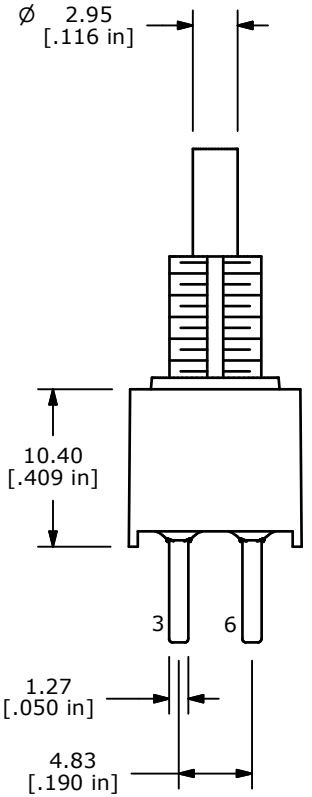

▲ SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-3, 4-6	1-2, 4-5

(ON) = MOMENTARY



NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. CONTACT RESISTANCE: 20 MILLI-OHMS MAX.
6. RATING: 1A @250VAC, 3A @ 120VAC (or 28VDC)
7. LIFE EXPECTANCY: 50,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000 Mega-ohm min.
9. DIELECTRIC STRENGTH: 1,500 V RMS @sea level.
10. SEAL RATING: IP-67
11. OPERATING TEMP.: -30°C to 75°C
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT.

REV	PCR NO	DESCRIPTION	DATE	BY
B	21591	BUSHING BASE WAS OVAL, NOW ROUND	9/23/14	EBP
A	18384	RELEASED FOR PRODUCTION	1/23/09	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH

TITLE 700ADP7B10M2QE

SCALE	DATE	DR	DWG	REV
2:1	1/23/2009	BLR	T750105	B