
UR133/A

LINEAR INTEGRATED CIRCUIT

300/500mA LOW DROPOUT LINEAR VOLTAGE REGULATORS

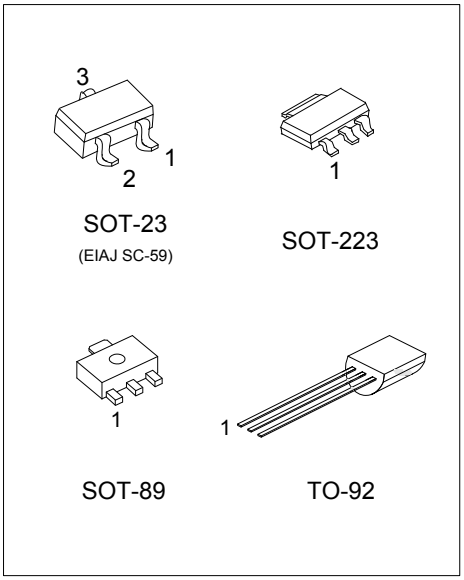

■ DESCRIPTION

The UTC **UR133/A** are 300/500mA fixed output voltage low dropout linear regulators. Wide range of available output voltage fits most of applications. Built-in output current-limiting most thermal-limiting provide maximal protection against any fault conditions.

■ FEATURES

*Guaranteed 300/500mA output current
*Input voltage range up to 12V
*Extremely tight load regulation
*Fast transient response
*Current-limiting and Thermal-limiting
*Three-terminal adjustable or fixed 1.5V, 1.8V, 2.2V, 2.5V, 2.7V, 2.8V, 2.9V,3.0V, 3.3V, 3.5V, 3.6V, 3.7V, 4.7V, 5.0V

■ ORDERING INFORMATION

Ordering Number		Package	② Pin Assignment	Packing
Lead Free	Halogen Free			
UR133①L-xx-AA3-②-③	UR133①G-xx-AA3-②-③	SOT-223	A: GOI B: OGI C: GIO D: IGO	R: Tape Reel B: Tape Box K: Bulk
UR133①L-xx-AE3-②-③	UR133①G-xx-AE3-②-③	SOT-23		
UR133①L-xx-AB3-②-③	UR133①G-xx-AB3-②-③	SOT-89		
UR133①L-xx-T92-②-③	UR133①G-xx-T92-②-③	TO-92		
UR133①L-xx-T92-②-③	UR133①G-xx-T92-②-③	TO-92		

Note: 1. ①: Current code: Blank: 300mA A: 500mA
2. Pin assignment: I:V_{IN}(Positive Power Input) O:V_{OUT}(Output) G:GND(Ground/Adjustable)
3. xx: Output Voltage, refer to Marking Information.





UR133①G-xx-AB3-②-③

(1)Packing Type
(2)Pin Assignment
(3)Package Type
(4)Output Voltage Code
(5)Green Package
(6)Current Code

(1) B: Tape Box, K: Bulk, R: Tape Reel
(2) refer to Pin Assignment
(3) AA: SOT-223, AE3: SOT-23, AB3: SOT-89
T92: TO-92
(4) xx: refer to Marking Information
(5) G: Halogen Free and Lead Free, L: Lead Free
(6) Blank: 300mA A: 500mA

Copyright © 2018 Unisonic Technologies Co., Ltd

■ MARKING INFORMATION

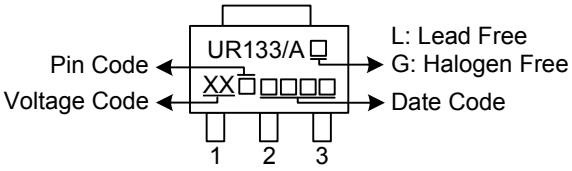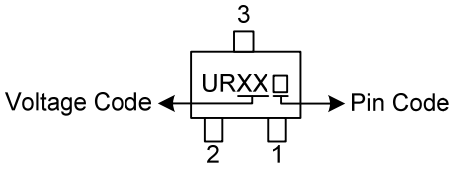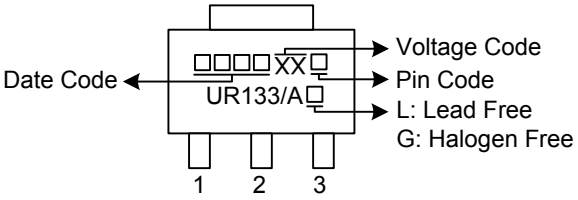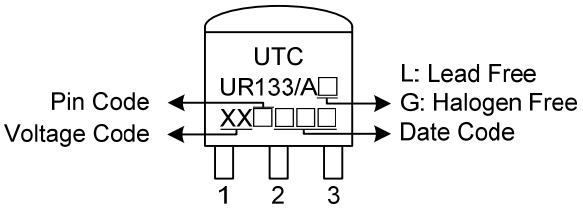PACKAGE	VOLTAGE CODE	PIN CODE	PIN 1	PIN 2	PIN 3	MARKING
SOT-223	15:1.5V 18:1.8V 22:2.2V 25:2.5V 27:2.7V 28:2.8V 29:2.9V 30:3.0V 33:3.3V 35:3.5V 36:3.6V 37:3.7V 47:4.7V 50:5.0V AD:ADJ	A	G	O	I	
		B	O	G	I	
		C	G	I	O	
		D	I	G	O	
SOT-23		A	G	O	I	
		B	O	G	I	
		C	G	I	O	
		D	I	G	O	
SOT-89		A	G	O	I	
		B	O	G	I	
		C	G	I	O	
		D	I	G	O	
TO-92		A	G	O	I	
		B	O	G	I	
		C	G	I	O	
		D	I	G	O	

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage V_{IN}		V_{IN}	-0.3 ~ +12	V
Power Dissipation	SOT-223	P_D	600	mW
	SOT-23		295	mW
	SOT-89		500	mW
	TO-92		525	mW
Operating Temperature		T_{OPR}	-40 ~ +85	°C
Storage Temperature		T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223	θ_{JA}	165	°C/W
	SOT-23		335	°C/W
	SOT-89		200	°C/W
	TO-92		190	°C/W

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, C_{IN}=1μF, C_{OUT}=10μF, unless otherwise specified)

For UR133/A-1.5V, 1.8V, 2.2V, 2.5V, 2.7V, 2.8V, 2.9V, 3.0V

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage-UR133/A		V_{OUT}	I_L=2mA, V_{IN}-V_{OUT}=1.4V	1.47	1.50	1.53	V
				1.77	1.80	1.83	V
				2.16	2.20	2.24	V
				2.45	2.50	2.55	V
				2.65	2.70	2.75	V
				2.74	2.80	2.86	V
				2.84	2.90	2.96	V
				2.94	3.00	3.06	V
Dropout Voltage (note 4,5)	UR133	V_D	I_L=300mA			1.5	V
	UR133A		I_L=500mA				
Line Regulation		ΔV_{OUT}	I_L=2mA, V_{IN}-V_{OUT}=2V ~ V_{IN}=9V			0.5	%V_{OUT}
Load Regulation (Note 2)	UR133	ΔV_{OUT}	I_L=2mA ~ 300mA, V_{IN}-V_{OUT} =2V		10	30	mV
	UR133A		I_L=2mA ~ 500mA, V_{IN}-V_{OUT} =2V		10	50	mV
Current Limit (Note 3)	UR133	I_{LIMIT}	V_{IN}-V_{OUT}=2V, V_{OUT}=0V		350		mA
	UR133A				550		mA
Standby Current		I_{ST-BY}	I_L=0, V_{IN}=9V			5.0	mA
Output Voltage Temperature Coefficient					50	150	PPM/°C


■ ELECTRICAL CHARACTERISTICS (Cont.)

For UR133/A-ADJ 3.3V, 3.5V, 3.6V, 3.7V, 4.7V, 5.0V

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
ADJUSTABLE (R1=120Ω, R2=200Ω, V_{OUT}=3.3V)							
Reference Voltage		V_{REF}	V_{IN}-V_{OUT}=2V, I_L=2mA	1.238	1.250	1.262	V
Output Voltage-UR133/A		V_{OUT}	I_L=2mA, V_{IN}-V_{OUT}=1.4V	3.23	3.30	3.37	V
				3.43	3.50	3.57	V
				3.53	3.60	3.67	V
				3.63	3.70	3.77	V
				4.61	4.70	4.79	V
				4.90	5.00	5.10	V
Dropout Voltage (Notes 4, 5)	UR133	V_D	I_L=300mA			1.3	V
	UR133A		I_L=500mA				
	UR133-ADJ	V_D	I_L=300mA			1.5	V
	UR133A-ADJ		I_L=500mA				
Line Regulation		ΔV_{OUT}	I_L=2mA, V_{IN}-V_{OUT}=2V ~ V_{IN}=12V			0.5	%V_{OUT}
Load Regulation (Note 2)	UR133	ΔV_{OUT}	I_L=2mA ~ 300mA, V_{IN}-V_{OUT} =2V		10	30	mV
	UR133A		I_L=2mA ~ 500mA, V_{IN}-V_{OUT} =2V		10	50	mV
Current Limit (Note 3)	UR133	I_{LIMIT}	V_{IN}-V_{OUT}=2V, V_{OUT}=0V		350		mA
	UR133A				550		mA
Standby current		I_{ST-BY}	I_L=0, V_{IN}=12V			5.0	mA
Adjust Pin Current		I_{ADJ}	V_{IN}=12V			120	μA
Adjust Pin Current Change	UR133	ΔI_{ADJ}	V_{IN}=2.75V~12V,I_L=1mA~300mA			5	μA
	UR133A		V_{IN}=2.75V~12V,I_L=1mA~500mA			5	μA
Output Voltage Temperature Coefficient					50	150	PPM/°C

Note 1: Guaranteed by design.
2: Regulation is measured at constant junction temperature, using pulsed ON time.
3: Current Limit is measured at constant junction temperature, using pulsed ON time.
4: Dropout is measured at constant junction temperature, using pulsed ON time, and the criterion is V_{OUT} inside target value± 2%.
5: Dropout test is skipped at the condition of V_{IN}< 3V.

■ TYPICAL APPLICATION CIRCUIT

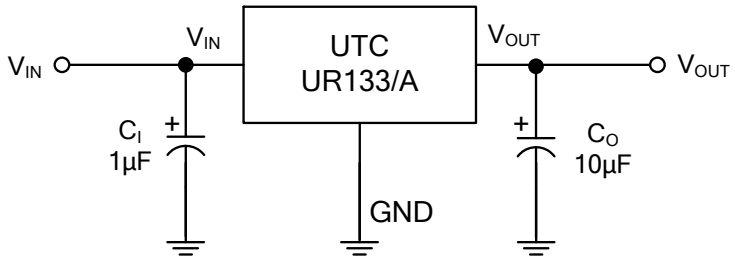


■ APPLICATION INFORMATION

A 10μF (or larger) capacitor is recommended between V_{OUT} and GND for stability. The part may oscillate without the capacitor. Any type of capacitor can be used, but not Aluminum electrolytics when operating below -25℃. The capacitance may be increased without limit.

A 1μF capacitor (or larger) should be placed between V_{IN} to GND.

UR133/A ADJUSTABLE

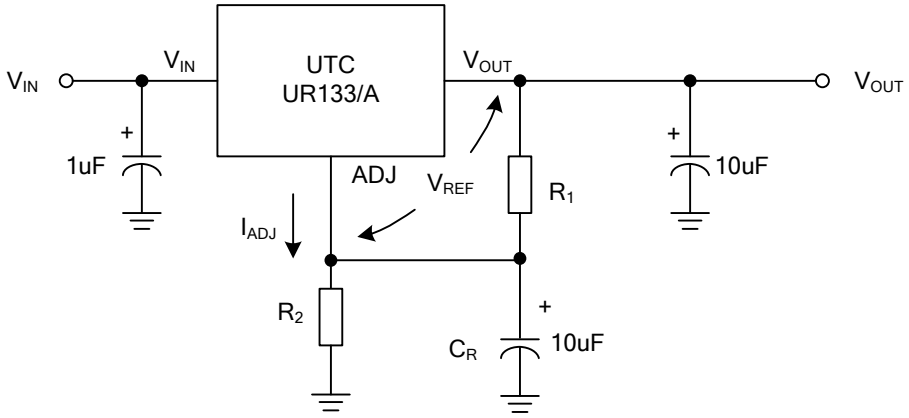


C_R:10uF to improve ripple rejection


$V_{OUT}=V_{REF}(1+R_2/R_1)+I_{ADJ}*R_2$

■ TYPICAL CHARACTERISTICS


Output Current v.s. Input Voltage

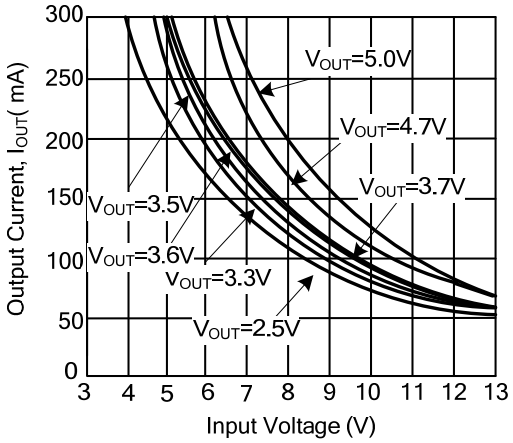


Line Transient Response

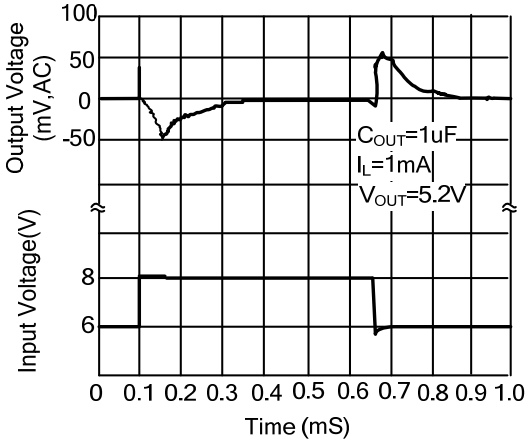


Ground Current vs.Input Voltage

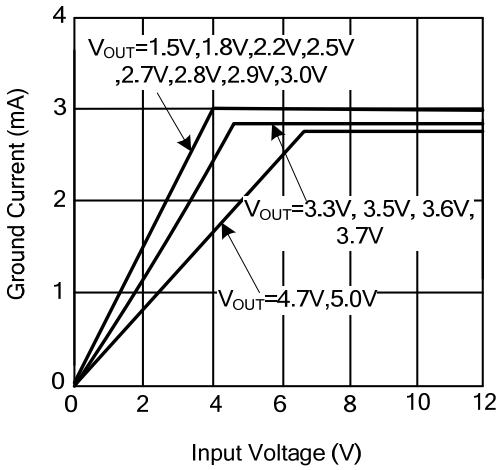


Load Transient Response

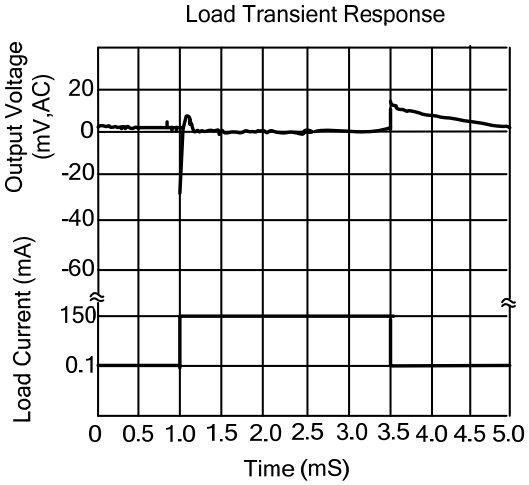

Dropout Voltage vs.Load Current

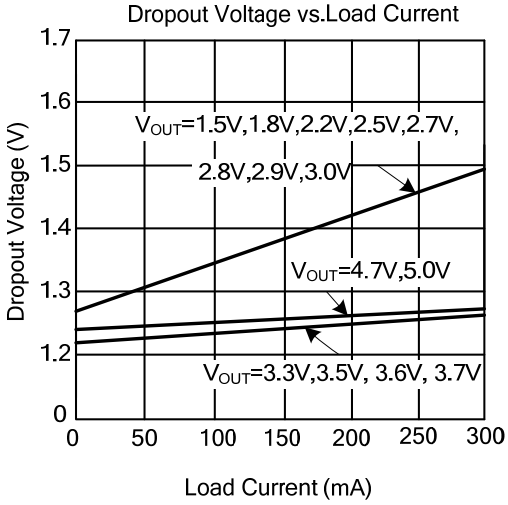


Load Transient Response

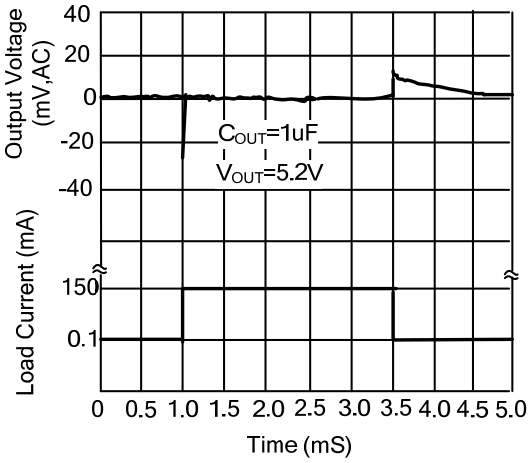


■ TYPICAL CHARACTERISTICS(Cont.)


Output Current v.s. Input Voltage

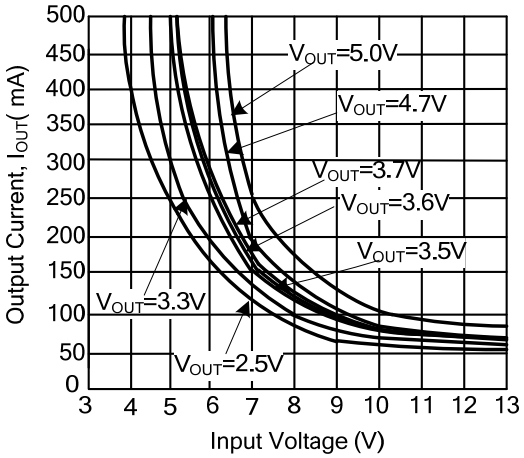


Line Regulation Response

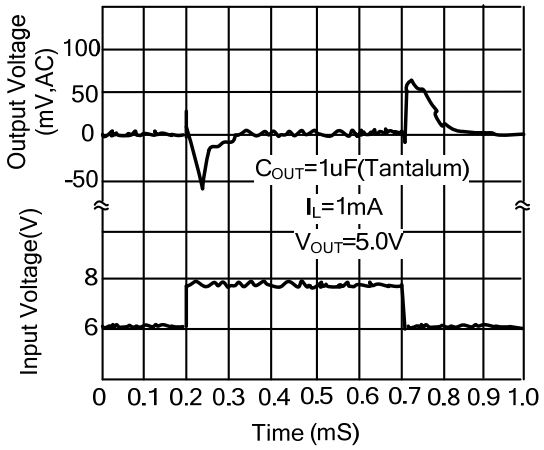


Ground Current vs.Input Voltage

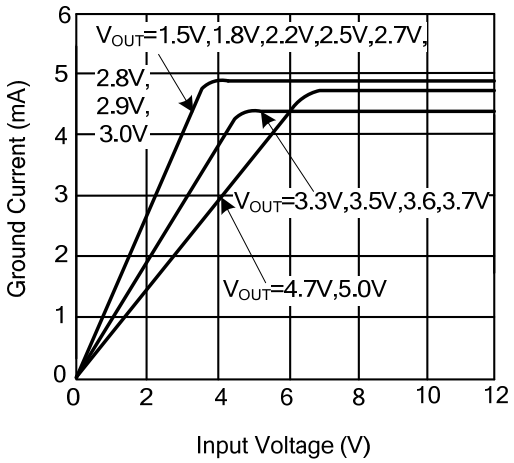


Load Transient Response

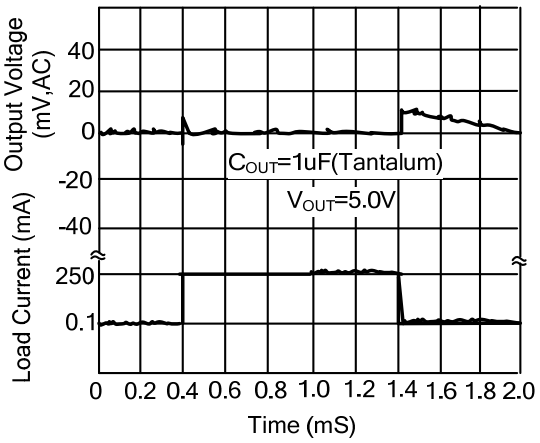

Dropout Voltage vs.Load Current

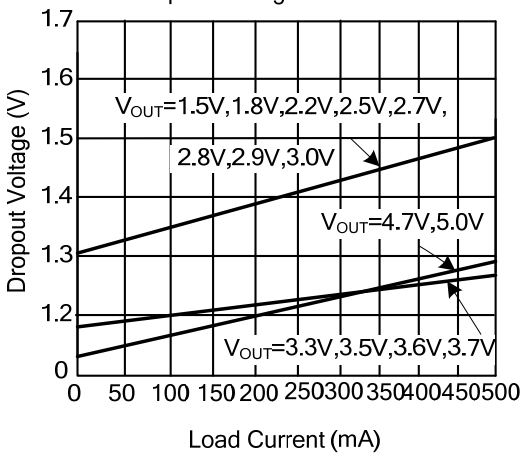

Load Transient Response

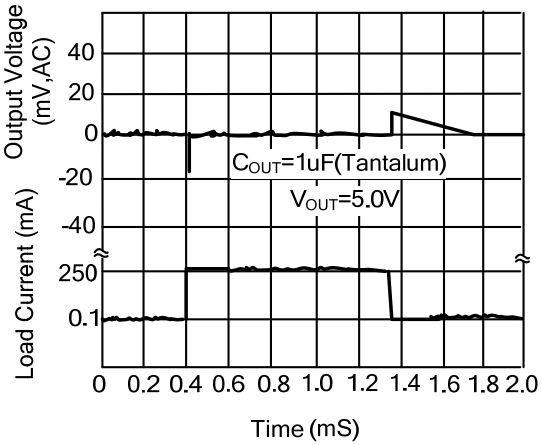

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.