
isc Silicon NPN Power Transistor BUJ303A

DESCRIPTION

- High Voltage
- High Speed Switching

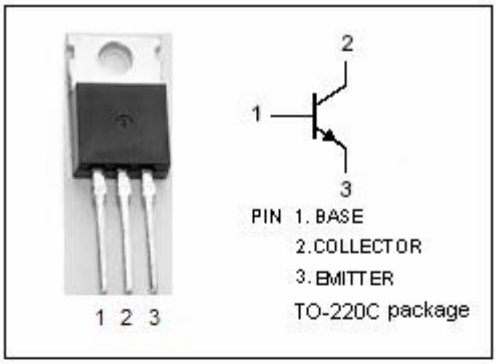


APPLICATIONS

- Desined for use in high frequency electronic lighting ballast applications, converters, inverters, switching regulators, motor control systems, etc.

ABSOLUTE MAXIMUM RATINGS (T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	900	V
V_{CEO}	Collector-Emitter Voltage	500	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current-Continuous	5	A
I_{CM}	Collector Current-Peak	10	A
I_B	Base Current	2	A
I_{BM}	Base Current-Peak	4	A
P_C	Collector Power Dissipation @T_C=25℃	100	W
T_j	Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-65~150	℃

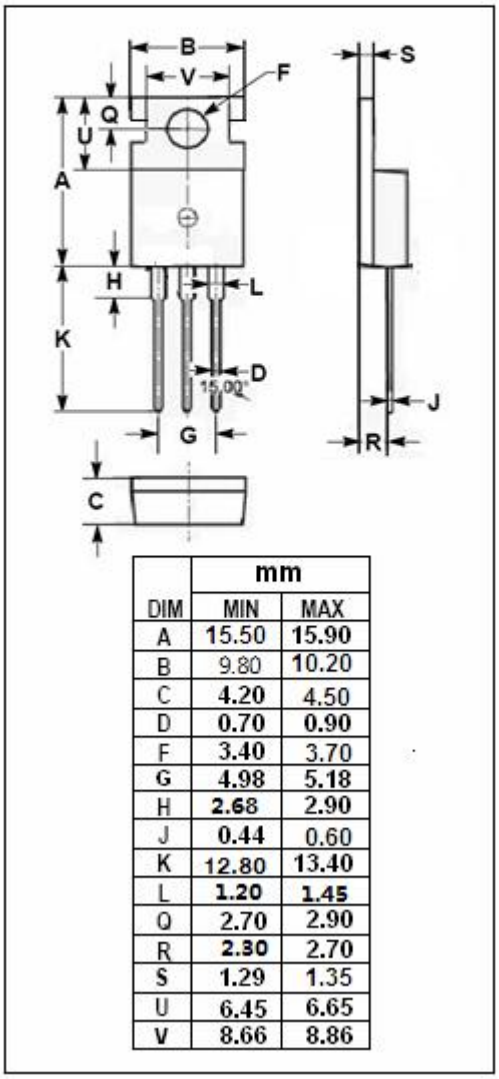

DIM	mm MIN	MAX
A	15.50	15.90
B	9.80	10.20
C	4.20	4.50
D	0.70	0.90
F	3.40	3.70
G	4.98	5.18
H	2.68	2.90
J	0.44	0.60
K	12.80	13.40
L	1.20	1.45
Q	2.70	2.90
R	2.30	2.70
S	1.29	1.35
U	6.45	6.65
V	8.66	8.86

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance,Junction to Case	1.25	K/W
$R_{th\ j\text{-}a}$	Thermal Resistance,Junction to ambient	60	K/W

Downloaded from Alldatasheet.com

isc Silicon NPN Power Transistor BUJ303A

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	I_C=50mA; I_B= 0	500			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 3A; I_B= 0.6A			1.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	I_C= 3A; I_B= 0.6A			1.3	V
I_{CES}	Collector Cutoff Current	V_{CE}=RatedV_{CES} ;V_{BE}= 0 V_{CE}=RatedV_{CES} ;V_{BE}= 0;T_C=125℃			1 2	mA
I_{EBO}	Emitter Cutoff Current	V_{EB}= 9V; I_C= 0			0.1	mA
I_{CEO}	Base Cutoff Current	V_{CE}= 500V; I_C= 0			0.1	mA
h_{FE-1}	DC Current Gain	I_C= 5mA ; V_{CE}= 5V	10		35	
h_{FE-2}	DC Current Gain	I_C= 0.5A ; V_{CE}= 5V	14		35	
Switching Times ;Resistive Load						
t_{on}	Turn-on Time	I_C= 2.5A; I_{B1}= -I_{B2}= 0.5A; R_L= 75Ω ; V_{BB2}= 4V			0.7	μs
t_s	Storage Time				4.0	μs
t_f	Fall Time				0.45	μs
Switching Times ;Resistive Load						
t_s	Storage Time	I_C= 2.5A; I_{B1}= -I_{B2}= 0.5A; L_B=1uH; -V_{BB}= 5V			1.6	μs
t_f	Fall Time				160	ns
Switching Times ;Resistive Load						
t_s	Storage Time	I_C= 2.5A; I_{B1}= -I_{B2}= 0.5A; L_B=1uH; -V_{BB}= 5V ； T_j=100℃			1.9	μs
t_f	Fall Time				200	ns

Downloaded from Alldatasheet.com