


MATERIALS	
BODY	ALUMINIUM
CONTACTS	GOLD PLATED
CONNECTORS	BRASS NICKEL PLATED
INSULATOR	PTFE



SPECIFICATIONS

FREQUENCY RANGE: 12 TO 18 GHz
 NUMBER OF OUTPUT PORTS: 2
 MINIMUM ISOLATION: 20 dB
 MAXIMUM VSWR: 1.60
 MAXIMUM INSERTION LOSS: 1.00 dB

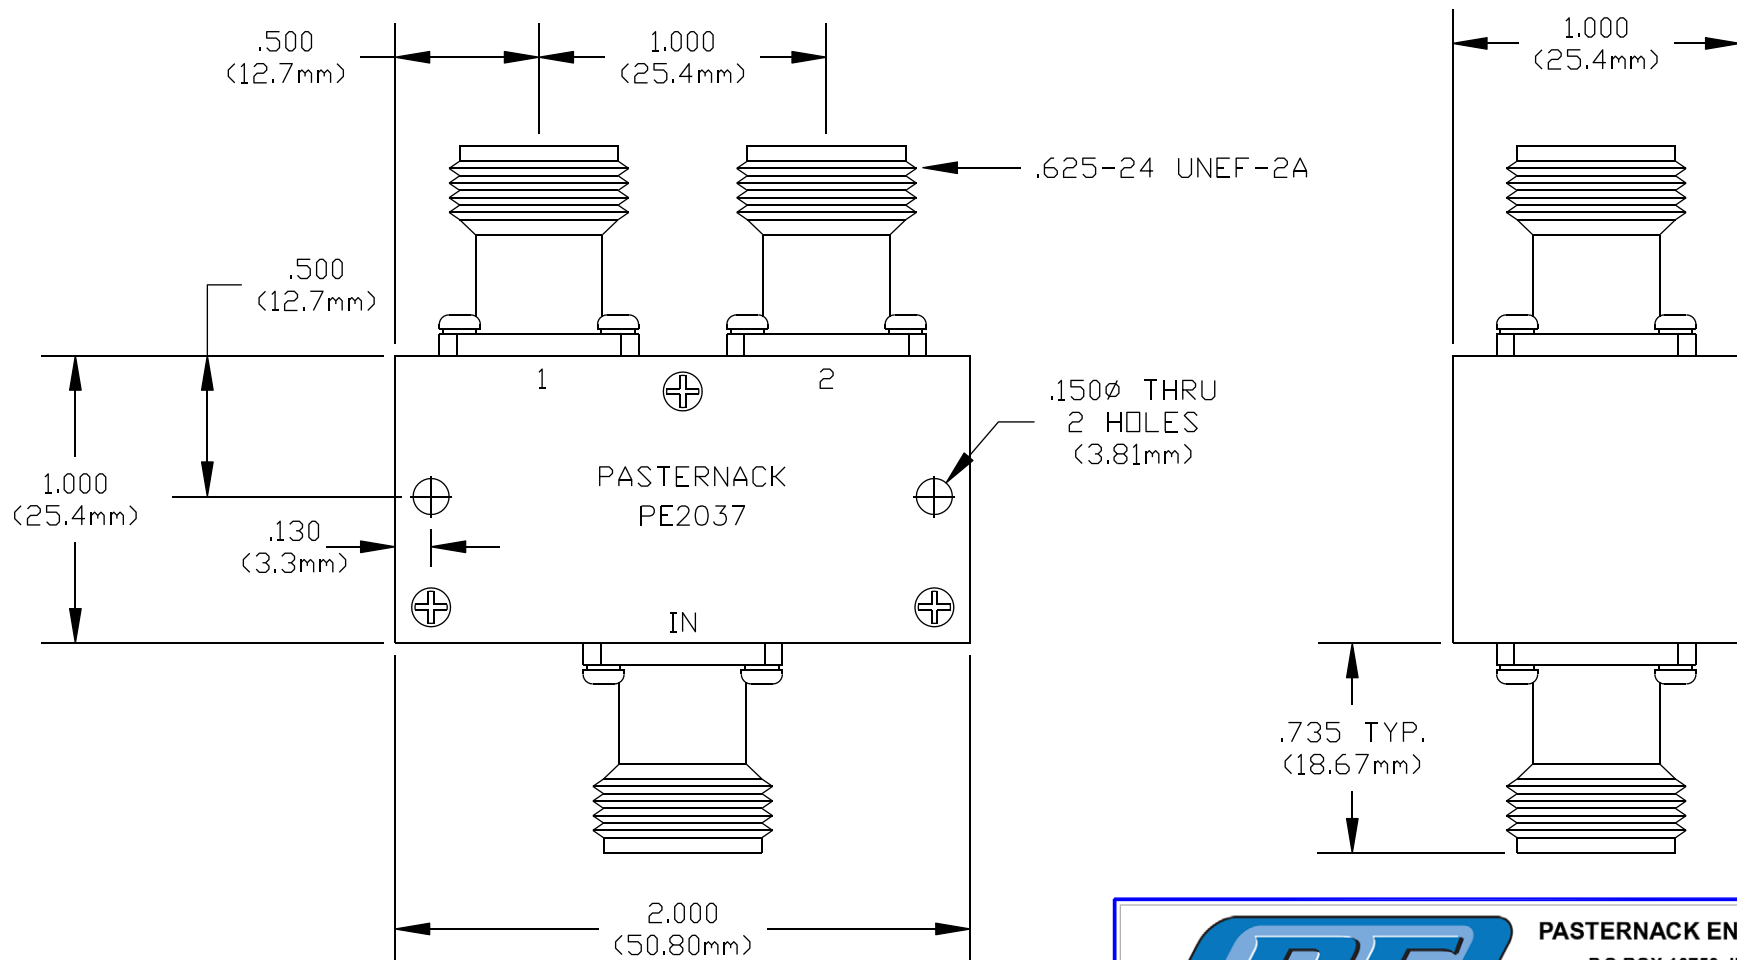

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE2037

DES. N FEMALE POWER DIVIDER, FREQUENCY
 RANGE: 12-18 GHz 2 OUTPUT PORTS

REV. - **FSCM NO. 53919**

CAD FILE 091108

SCALE N/A

SIZE A 127

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.