

Federkontakte am Band
spring contact on carrier strip

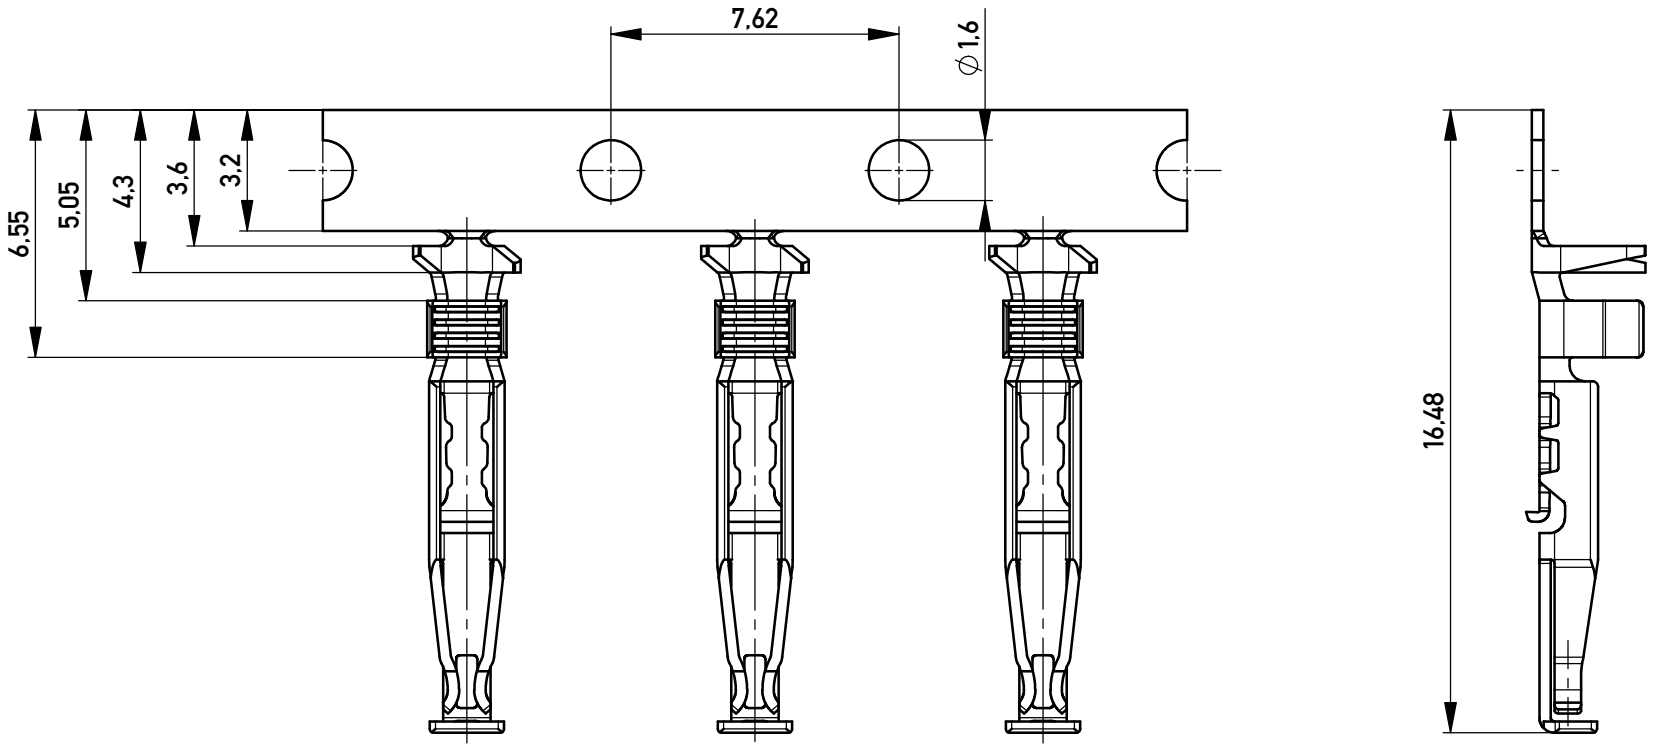


Federkontakt vereinzelt
spring contact isolated

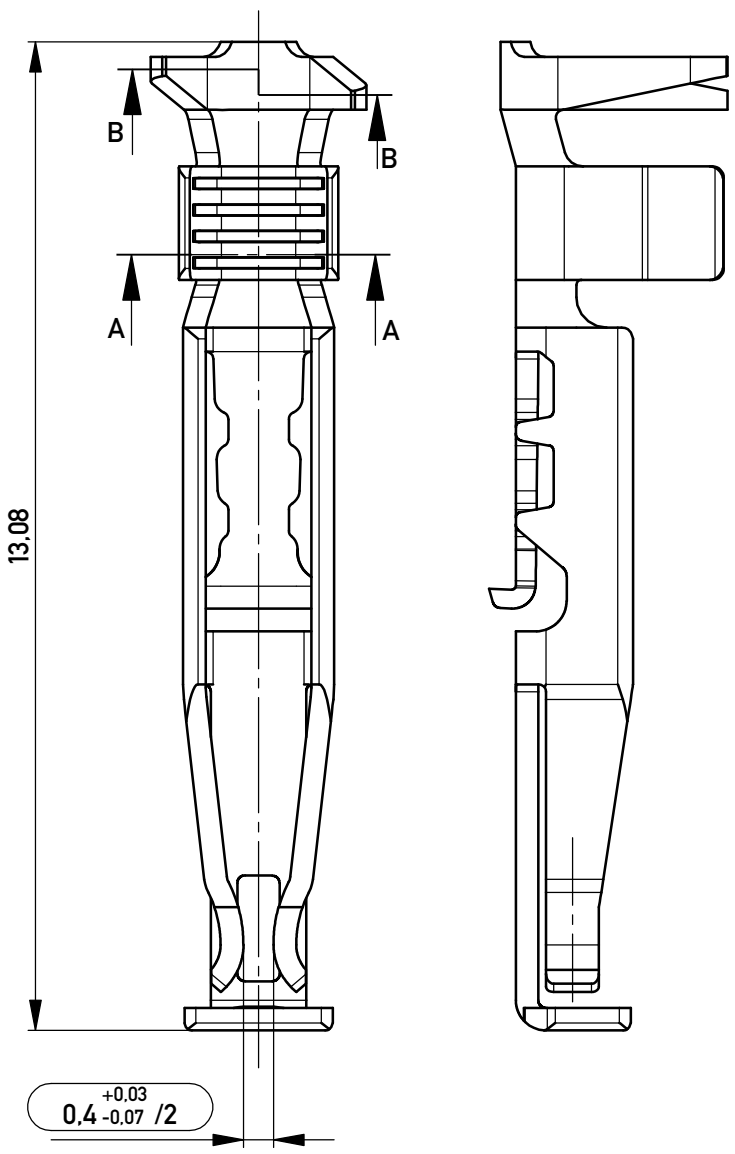

Schnitt A-A
cross section A-A

M 10:1


Drahtcrimp
wire crimp

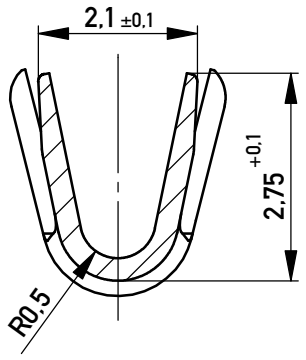


Schnitt B-B
cross section B-B

M 10:1

Isolationscrimp
insulation crimp

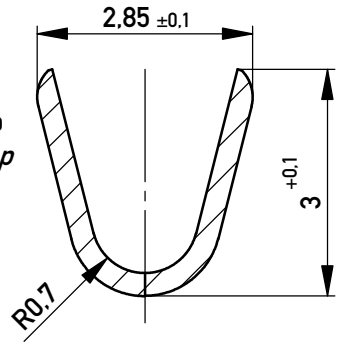

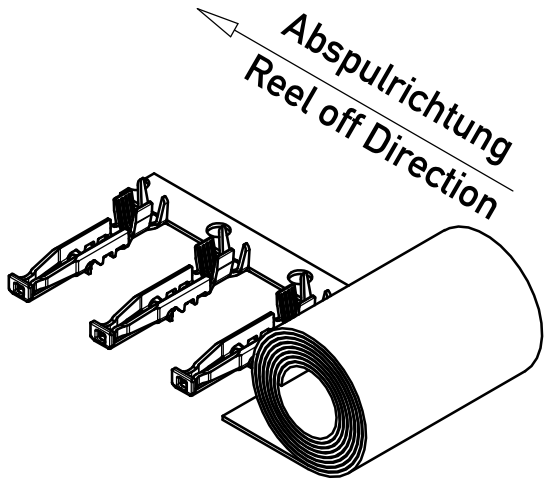

SPC-Maß: Prüfmerkmale der Kategorie /1
/1 Für SPC-Maße muss eine x/s Regelkarte geführt werden mit Nachweis der Prozessfähigkeit in der Serie (Cpk) oder 100% - Prüfung

Prüfmerkmal: Prüfmerkmale der Kategorie /2 und /3
/2 Für Prüfmerkmale muss eine x/s Regelkarte geführt werden

/3 Prüfmerkmale werden serienbegleitend geprüft

[1]AWG 20 für Isolationsdurchmesser > 1,5mm

AWG 18-20[1]	10.000	∅ 630	137	
Leiterquerschnitt *wire cross section*	**Menge** *quantity*	Spulendurchmesser *reel diameter*	Anforder-ungsstufe *class*	**Bemerkung** *remark*

Information:

Tolerances

All Dimensions in mm

Scale 2:1

Material CuNi 2 Si

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation

Federkontakte 2,54 SRC-A BA 2

spring contact 2,54 SRC-A

www.ERNI.com

100203210142

K

A3

c		12.05.2016	
Index		Date	

Class SRCROL