




TRANSFORMER FOR DIGITAL AUDIO DATA TRANSMISSION

- Operational transmitting rate: 1 to 7M bps
- Controlled rise time 25nS max.
- 2KV isolation voltage
- Standard operating temp: 0°C to +70°C (see footnote)
- Industrial operating temp: -40°C to +85°C (see footnote)

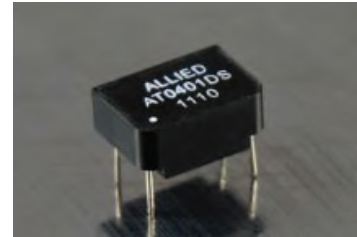


Electrical Specifications @25°C						
Part Number	Turns Ratio(±3%)	OCL(mH Min)	Lk(uH Max)	DCR(25°C)	HI-POT	Primary Pins
	Pri:Sec	10KHz 0.1V	10KHz 0.1V	(Ω Max)	(VAC,1mA,1S)	Pri
AT0401D_	1CT:1CT	2.5	0.5	0.7	2000	1-2

*Complete part number by inserting "S" for Standard Temp or "I" for Industrial Temp.

All specifications subject to change without notice.

MECHANICAL

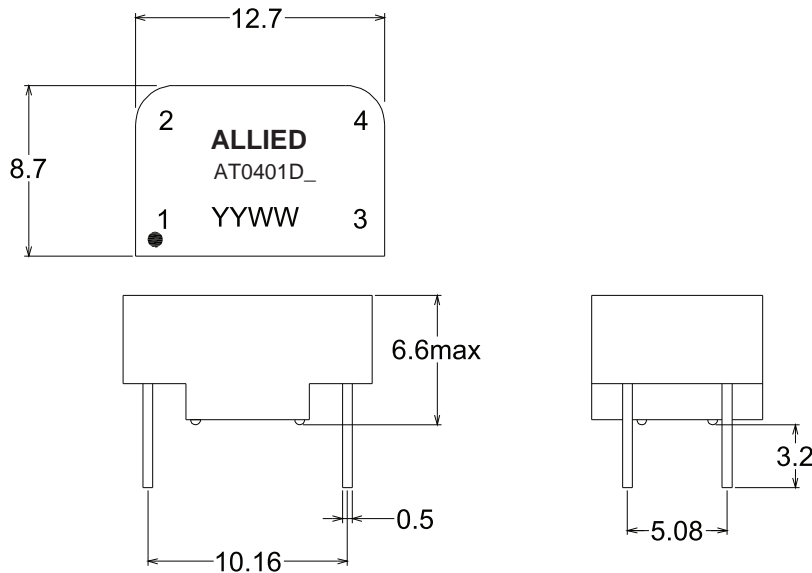

SCHEMATICS

