



1. Mechanical Dimensions:

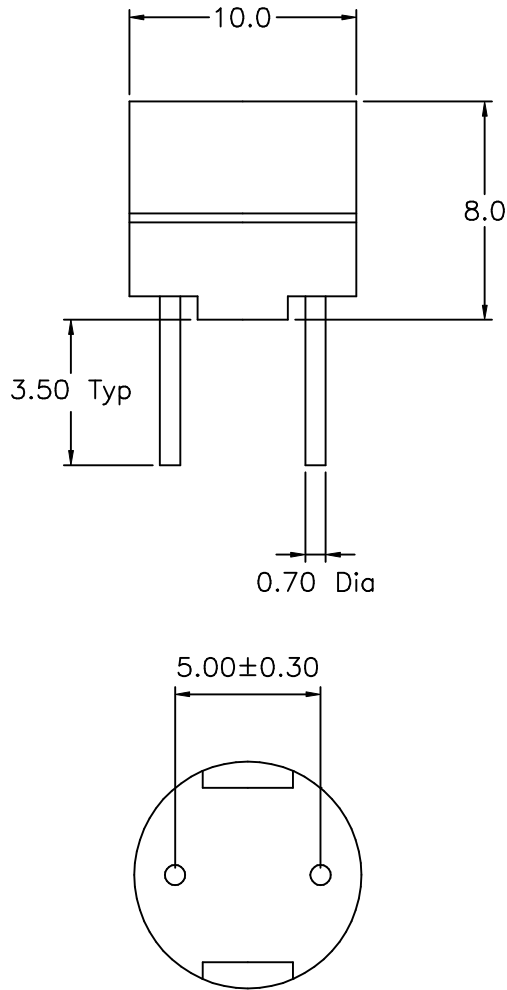

2. Schematic:



3. Electrical Specifications:

INDUCTANCE: 1mH ±20% @1KHz

IDC: 280mA Max

DC RESISTANCE: 2.30 Ohms Max

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -30°C to +100°C

Doc. Rev. A/1

XFMRs Inc.	Title: Power Inductor		
	UNLESS OTHERWISE SPECIFIED	P/N: XFRCR108D-102M	REV. A
	TOLERANCES: .xx ±0.25	DWN. 廖玉坤	Feb-15-01
	Dimensions in MM	CHK. 李清儿	Feb-15-01
SHEET 1 OF 1	APP. Isaiah M	Feb-15-01	