



1. Dimensions:

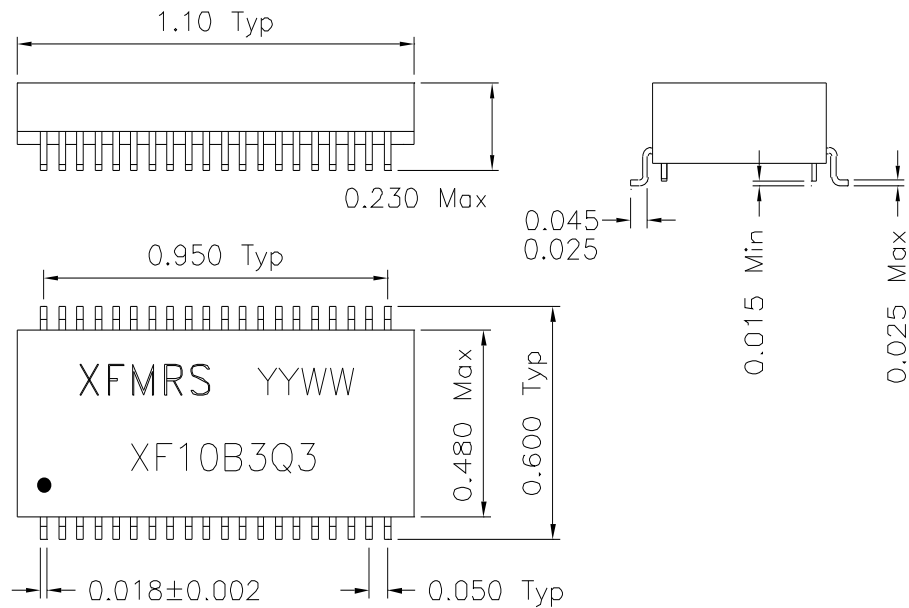

2. Schematic:

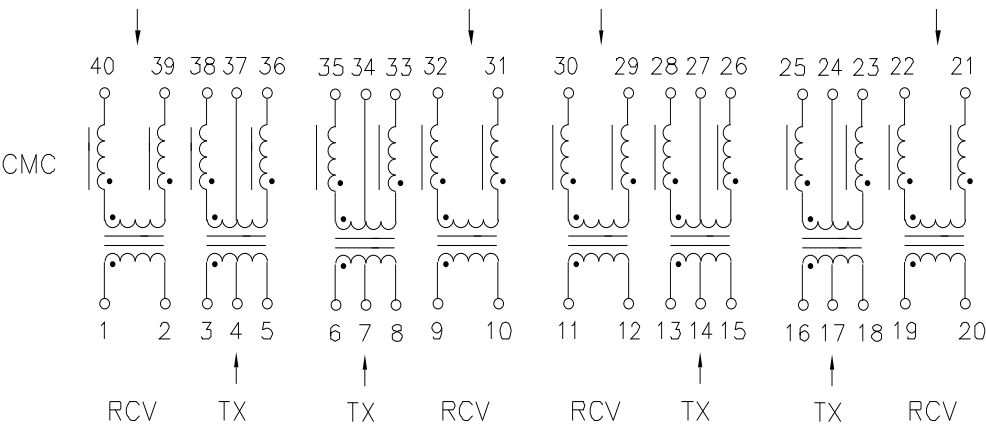

3. Electrical Specifications: @25°C

Pri/Sec Isolation: 1500 Vrms
Turns Ratio: 1CT:2CT (TX)
Turns Ratio: 1 : 1 (RCV)
PRI OCL: 180uH Minimum (TX&RCV) @100KHz 50mV
Cw/w: 10pF Maximum (PRI/SEC) @100KHz 50mV
Leakage Inductance: 0.30uH Max (SEC Shorted)
Insertion Loss: 0.5dB Maximum @1-10MHz
CROSSTALK: -35dB Minimum 1-10MHz
Return Loss: 20dB Min. @ 5-10MHz 100 Ohms
15dB Min. @ 5-10MHz 98±13Ohms

XFMRS Inc	Title: Quad Ports 10BASE-T Modules			
	P/N: XF10B3Q3		REV. A	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	DWN.	李清儿	Mar-25-99
		CHK.	孙小松	Mar-25-99
		APP.	Joe Huff	Mar-25-99