
HFE17 HIGH POWER LATCHING RELAY



Features

- Latching relay
- 200A switching capability
- According to ANSI C 12.1
  (Carrying: 12kA current/66.7ms; 7kA peak current/100ms)
- Switching power up to 55.4kVA
- 4kV dielectric strength (between coil and contacts)
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (97.6 x 73.2 x 29.5) mm

CONTACT DATA

Contact arrangement	2A, 2B
Contact resistance	Typ.:0.25mΩ max.(at 200A) (1)
Contact material	$AgSnO_2$
Contact rating (Res. load)	200A 277VAC/28VDC
Max. switching voltage	440VAC
Max. switching current	200A
Max. switching power	55400VA / 5600W
Mechanical endurance	5 x 10^4OPS
Electrical endurance	6000OPS

Notes: (1) Typical value: Sampling quantity for contact resistance shall not less than 20 pcs, take the average value from 5 continous measurements for each sample.

CHARACTERISTICS

Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	4000VAC 1min
	Between open contacts	2000VAC 1min
Creepage distance		9.6mm
Operate time (at nomi. volt.)		20ms max.
Release time (at nomi. volt.)		20ms max.
Shock resistance	Functional	98m/s^2
	Destructive	980m/s^2
Vibration resistance		10Hz to 55Hz 1.5mm DA
Humidity		5% ~85% RH
Ambient temperature		-40˚C to 85˚C
Termination		QC
Unit weight		Approx. 500g
Construction		Dust protected

Notes: The data shown above are initial values.

COIL

Coil power	Single coil latching: Approx. 12W Double coils latching: Approx. 24W

COIL DATA at 23˚C

Nominal Voltage VDC	Set / Reset Voltage VDC max.	Pulse Duration ms min.	Coil Resistance x (1±10%)Ω	
12	9.6	200	Single coil latching	12
24	19.2	200		48
48	38.4	200		190
12	9.6	200	Double coils latching	6+6
24	19.2	200		24+24
48	38.4	200		95+95

Notes: When requiring other nominal voltage, special order allowed.

ORDERING INFORMATION

	HFE17	-A /	12	-2D	T	2	-R	(XXX)


Type		
Version	**A:** Type A contact terminal	
Coil voltage	12, 24, 48VDC	
Contact form[1]	**2D:** 2 Form B	**2H:** 2 Form A
Contact material	**T:** $AgSnO_2$	
Coil Sort	**1:** Single coil latching	**2:** Double coils latching
Polarity	**R:** Negative polarity	**Nil:** Positive polarity
Special code[2]	**XXX:** Customer special requirement	**Nil:** Standard

Notes: 1) 2H means that relay is on the "reset" status when delivery; 2D means that relay is on the "set" status when delivery.If no speical required by customer,we will keep the relay on the "set" status when delivery.
2) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions

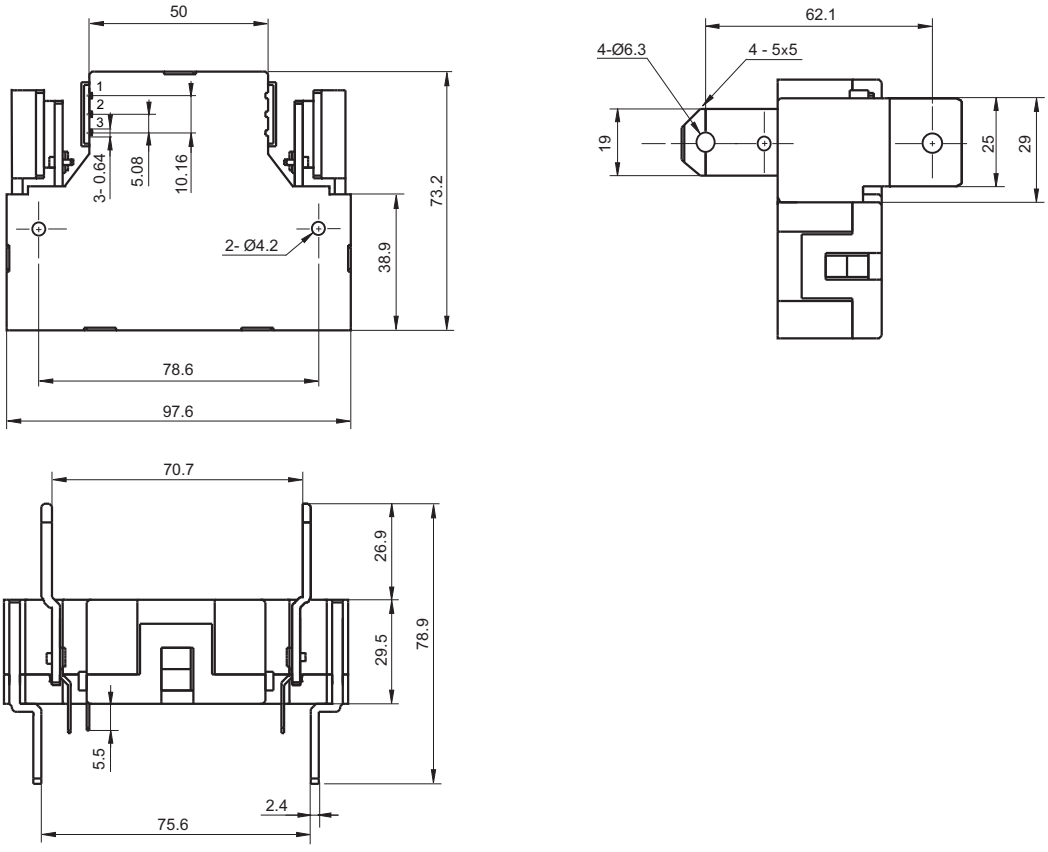


Remark: In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Coil Wring Diagram

Positive polarity

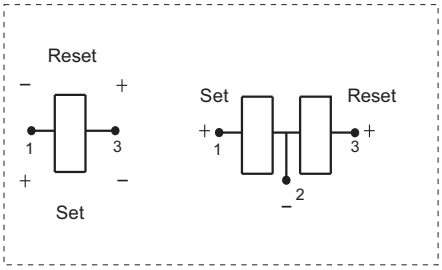

Negative polarity

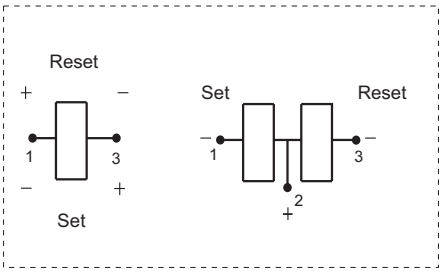

Notice

1. Relay is on the “reset” or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to “set” or "reset" status, therefore, when application (connecting the power supply), please reset the relay to “set” or “reset” status on request.
2. In order to maintain “set” or “reset” status, energized voltage to coil should reach the rated voltage, impulse width should be 5 times more than “set” or “reset” time. Do not energize voltage to “set” coil and “reset” coil simultaneously. And also long energized time (more than 1 min) should be avoided.
3. The terminals of relay without twisted copper wire can not be tin-soldered, can not be moved willfully.
4. Relays used for metering measuring applications are usually made with dust proof structure, while most relays could be made specially per customer's specific requirements.No longer than 6 months' storage time is recommended for this kind of relay, and please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.