



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			The first edition released	2020.05.12	Mark

3个配件用小PE袋装在一起

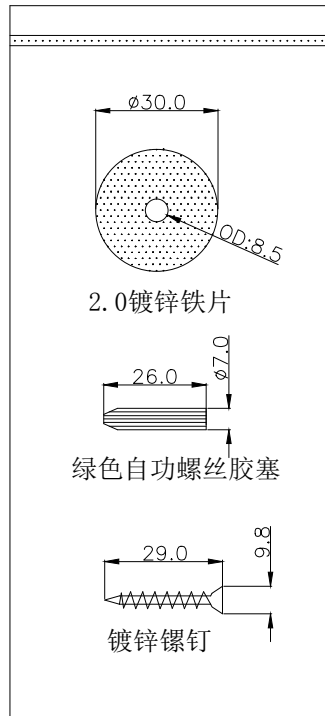

注意SMA是母针

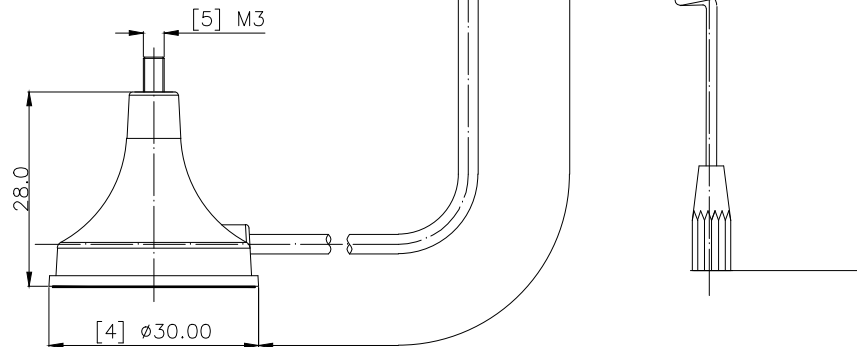

Note:

- 1.cable length: 3 M(RG174);
- 2.frequency range: 2400MHz~2500MHz
- 3.connector: SMA;
- 4.nominal impedance : 50 ohms;
- 5.VSWR: < 3.0:1 on the whole band;
- 6.radiation pattern: omnidirectional;
- 7.antenna gain: 1 dBi;
- 8.polarization: vertical;
- 9.operating temperature: -30° C to +90° C;
- 10.ROHS compliant;

NO	ITLM	DESCRIPTION	Q'TY
10	安装配件	吸盘铁片、胶塞、镙钉	1
9	2YT022	Ø10.0*L196mm 3圈*2 弹簧钢, 电着黑	1
8	天线帽子	Ø3.50 ABS 黑色	1
7	底膜	背胶底膜	1
6	磁铁	磁铁	1
5	天线底座	Ø30.0*Ø7.0*H28.0 ABS黑色	1
4	连接螺丝	M3连接螺丝	1
3	CABLE	RG174黑色线	1
2	热缩套管	黑色热缩管	1
1	SMA头	SMA公头母针, 表面镀金	1

HJ-Tech 东莞市皇捷通讯科技有限公司

DRAW NO.	DATE	DRAW NAME: 2.4GHz吸盘天线	
DESIGN: Mark	2020.06.11	RG174黑色线焊SMA公头母针+吸盘天线组件+ 安装配件L=3M	
CHECK:		FILE:	P/N NO. HJ-2.4G-SMA-RG174-3M-3E0301BK-008
APPROVED:		MODEL:	UNIT: mm SHEET: N/A
		REV. A0 SCALE N/A	

COPLIANCE WITH THE REQUIEMENT RoHS HF SONY00259 OTHER
* NO USING RESTRICTED AND BANNED SUBSTANCE

DIM	TOL	DIM	TOL
X.	±3.0	X'	±4.0'
X.X	±1.5	X.X'	±3.0'
X.XX	±0.05	X.XX'	±2.0'
X.XXX	±0.005	X.XXX'	±1.0'