- ***Ideal for 433.42 MHz Transmitters***
- ***Very Low Insertion Loss***
- ***Quartz Stability***
- ***Ultra Miniature Ceramic SMD Package (QCC8C)***

# SR5512

| Absolute Maximum Rating (Ta=25°C) | | | |
|---|---|---|---|
| Parameter | | Rating | Unit |
| CW RF Power Dissipation | $P$ | 0 | dBm |
| DC Voltage | $V_{DC}$ | ±30 | V |
| Operating Temperature Range | $T_A$ | -10 ~ +60 | °C |
| Storage Temperature Range | $T_{stg}$ | -40 ~ +85 | °C |

| Electronic Characteristics | | | | | | |
|---|---|---|---|---|---|---|
| Parameter | | Sym | Minimum | Typical | Maximum | Unit |
| Frequency (25°C) | Nominal Frequency | $f_c$ | NS | 433.42 | NS | MHz |
| | Tolerance from 433.42 MHz | $\Delta f_c$ | - | - | ± 75 | KHz |
| Insertion Loss | | $IL$ | - | 1.5 | 2.0 | dB |
| Quality Factor | Unloaded Q-Value | $Q_u$ | - | 7,500 | - | - |
| | 50Ω Loaded Q-Value | $Q_L$ | - | 1,200 | - | - |
| Temperature Stability | Turnover Temperature | $T_o$ | 25 | - | 55 | °C |
| | Turnover Frequency | $f_o$ | - | $f_c$ | - | KHz |
| | Frequency Temperature Coefficient | $FTC$ | - | 0.032 | - | ppm/°C$^2$ |
| Frequency Aging | Absolute Value during the First Year | $\|f_A\|$ | - | - | 10 | ppm/yr |
| DC Insulation Resistance Between any Two Pins | | - | 1.0 | - | - | MΩ |
| RF Equivalent RLC Model | Motional Resistance | $R_M$ | - | 19 | 26 | Ω |
| | Motional Inductance | $L_M$ | - | 52.4638 | - | μH |
| | Motional Capacitance | $C_M$ | - | 2.5728 | - | fF |
| | Shunt Static Capacitance | $C_o$ | 2.25 | 2.55 | 2.85 | pF |

NS = Not Specified


**Note:**

1. The frequency $f_c$ is the frequency of minimum IL with the resonator in the specified test fixture in a 50Ω test system with VSWR ≤ 1.2:1.
2. Unless noted otherwise, case temperature TC = +25°C±2°C.
3. Frequency aging is the change in fC with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
4. Turnover temperature, T0, is the temperature of maximum (or turnover) frequency, f0. The nominal frequency at any case temperature, TC, may be calculated from: $f = f_o [1 - FTC (T_O - T_C)^2]$.
5. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance $C_O$ is the measured static (nonmotional) capacitance between input terminal and ground or output terminal and ground. The measurement includes case parasitic capacitance.
6. Derived mathematically from one or more of the following directly measured parameters: $f_c$, $IL$, 3 dB bandwidth, $f_C$ versus $T_C$, and Co.
7. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
8. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
10. For questions on technology, prices and delivery, please contact our sales offices or e-mail to sales@vanlong.com.

Phone: +86 10 6301 4184 Fax: +86 10 6301 9167 Email: sales@vanlong.com Web: http://www.vanlong.com

© 2004 by Vanlong Technology Co., Ltd. 

## Package Dimensions (QCC8C)

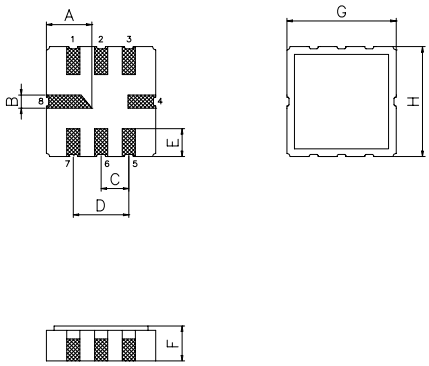


### Electrical Connections

| Terminals | Connection |
|---|---|
| 2 | Terminal 1 |
| 6 | Terminal 2 |
| 4,8 | Case-Ground |
| 1,3,5,7 | NC |

### Package Dimensions


| Dimensions | Nom (mm) | Dimensions | Nom (mm) |
|---|---|---|---|
| A | 2.08 | E | 1.20 |
| B | 0.60 | F | 1.35 |
| C | 1.27 | G | 5.00 |
| D | 2.54 | H | 5.00 |

## Marking





1. R5512 - Part Code
2. Frequency in MHz
3. Date Code:
   Y : Last digit of year
   WW : Week No.

## Equivalent LC Model and Test Circuit





Equivalent LC Model





Test Circuit

## Typical Application Circuit


Low Power Transmitter Application

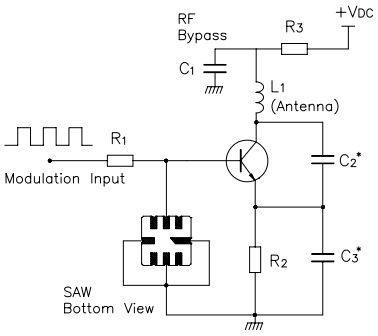



Local Oscillator Application

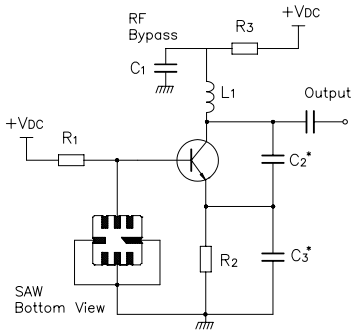


## Typical Frequency Response

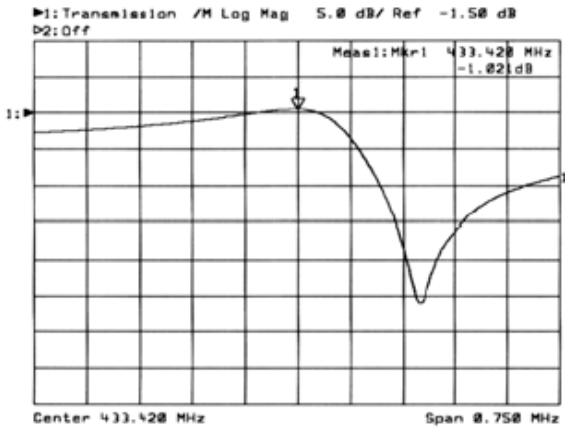


## Temperature Characteristics

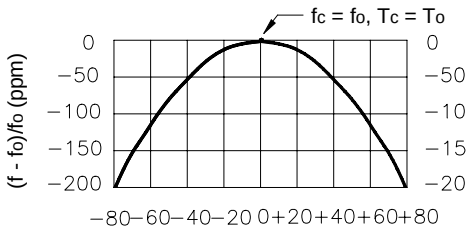


ΔT= Tc –To (°C)

The curve shown above accounts for resonator contribution only and does not include oscillator temperature characteristics.

Phone: +86 10 6301 4184 Fax: +86 10 6301 9167 Email: sales@vanlong.com Web: http://www.vanlong.com

© 2004 by Vanlong Technology Co., Ltd.