
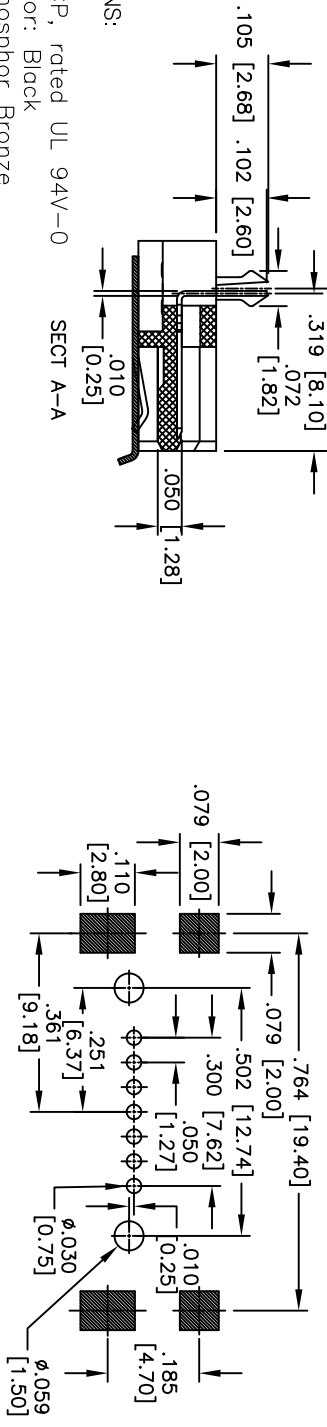


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/23/10	

APPROVED: _____
 DATE: _____ TITLE: _____

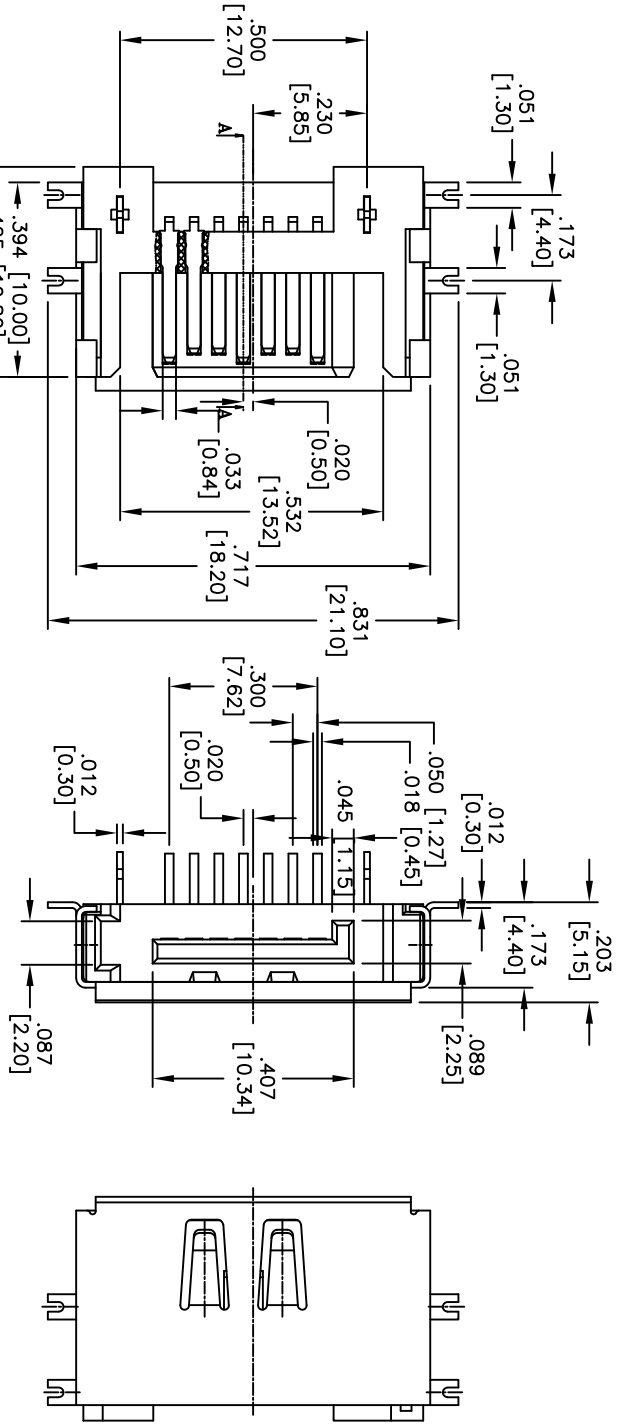

SPECIFICATIONS:

Material:
 Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold Flash over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails

Electrical:

Operation Voltage: 100 VAC max.
 Current rating: 1.5 Amps per contact
 Contact resistance: 30 Milliohms max
 Insulation resistance: 1000 Megohms min
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -55°C to +125°C

Environmental:

Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10
 .XX ± .020
 .XXX ± .015
 .XXX ± .015

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE
DRAWN	DY	9/23/10
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	SATA-B-PR-RT	-

REF: S00078T SCALE: NTS SHEET 1 OF 1