

Isc N-Channel MOSFET Transistor

STP6NK90ZFP

FEATURES

- Typical $R_{DS(on)}=1.56\ \Omega$
- With low gate drive requirements
- Easy to drive
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Ideal for off-line powersupplies adaptors and PFC
- Lighting
- High current, high speed switching

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DS}	Drain-Source Voltage	900	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current-Continuous@ $T_c=25^\circ\text{C}$ $T_c=100^\circ\text{C}$	5.8 3.65	A
I_{DM}	Drain Current-Single Pulsed	23.2	A
P_D	Total Dissipation	30	W
T_j	Operating Junction Temperature	-55~150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	4.2	$^\circ\text{C/W}$
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62.5	$^\circ\text{C/W}$

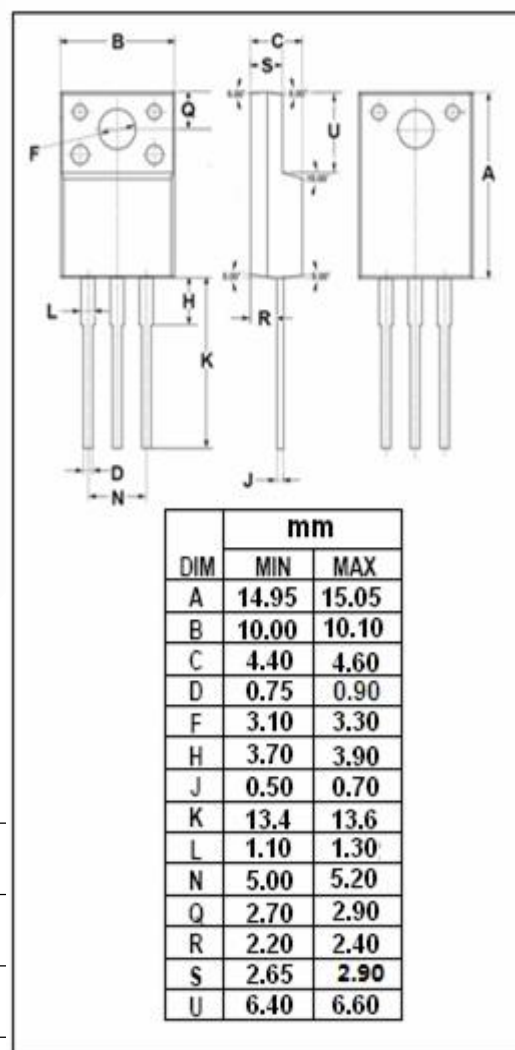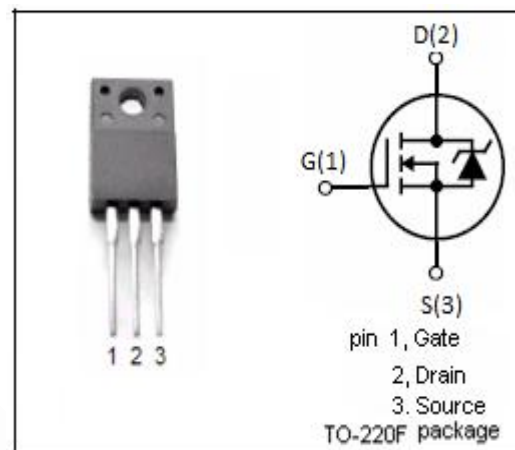

isc N-Channel MOSFET Transistor

STP6NK90ZFP

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V; I_D=1mA$	900			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=\pm 30V; I_D=0.1mA$	3		4.5	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10V; I_D=2.9A$		1.56	2	Ω
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V; V_{DS}=0V$			± 10	μA
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=900V; V_{GS}=0V; T_J=25^{\circ}\text{C}$ $T_J=125^{\circ}\text{C}$			1 50	μA
V_{SDF}	Diode forward voltage	$I_{SD}=5.8A, V_{GS}=0V$			1.6	V