


# PER-V30C

Computing Platform Service Partner

## Mini PCI Single Channel Video Capture Module

Audio-out connector  
CVBS In & S-video In & Audio-in connector

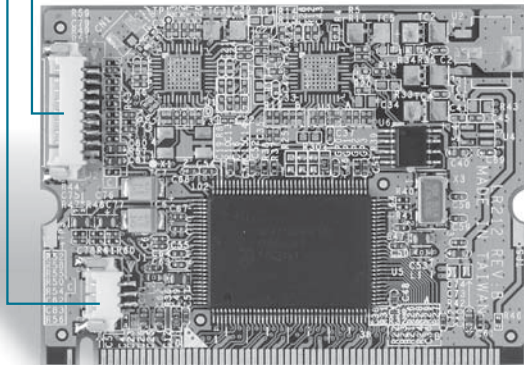

### Features

- Mini PCI Type III Interface
- Single Channel Video Capture with Philips SAA7135
- NTSC/PAL Video Format Support

### Specifications


Form Factor	Mini PCI Type III B 1.8" x 2.35" (44.5mm x 59.6mm)
Video Decoder	Philips SAA7135
Video Input	CVBS & S-Video
Video Format Support	NTSC & PAL
Sample Rate	720 pixels/line
Software Support	Windows® 2000/XP WDM driver for DirectShow based application
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

### Ordering Information

- TF-PER-V30C-A10**  
Mini PCI, Single Channel Video Capture Module with Philips SAA7135, Rev. A1.0
- PER-V30C-A10**  
Mini PCI Single Channel Video Capture Module with Philips SAA7135

# PER-C40C

## Mini PCI 2/4 RS-232 COM Port Module

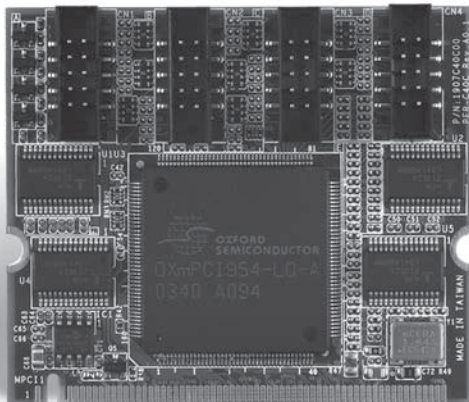

### Features

- Mini PCI Type III Interface
- Two or Four RS-232 Ports Onboard
- Full Duplex Serial Communication

### Specifications

Form Factor	Mini PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
UART Chipset	OXFORD OXmPCI952 or OXmPCI954
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

### Ordering Information

- TF-PER-C40C-A10**  
Mini PCI 2-port RS-232 Module Rev. A1.0
- TF-PER-C40C-A10-01**  
Mini PCI 4-port RS-232 Module Rev. A1.0
- PER-C40C-A10**  
Mini PCI 2-port RS-232 Module Rev. A1.0
- PER-C40C-A10-01**  
Mini PCI 4-port RS-232 Module Rev. A1.0

01

Compact Boards

02

SubCompact Boards

03

Embedded Motherboards

04

PC/104 CPU Modules

05

COM Express CPU Modules

06

ETX CPU Modules

07

RISC CPU Modules

08

Media PCs

09

Mini PCI Modules

10

PC/104 Peripheral Modules

11

Full-size SBC

12

Half-size SBC

13

Accessories