VPU AC I 1+1 275/25 LCF S


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image



Abb.ähnlich

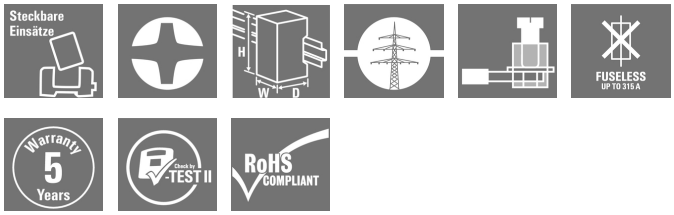

Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4.
This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. A special Type I and Type II protective device is even available for photovoltaic applications.

General ordering data

Version	Surge voltage arrester, Low voltage, without telecomm. contact, Leakage-current-free, Surge protection, Single-phase, TN, TT, IT with N, IT without N
Order No.	2726680000
Type	VPU AC I 1+1 275/25 LCF S
GTIN (EAN)	4050118802580
Qty.	1 pc(s).
Replacement parts	2730850000 2730860000

VPU AC I 1+1 275/25 LCF S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	91 mm	Depth (inches)	3.583 inch
Height	96.3 mm	Height (inches)	3.791 inch
Width	36 mm	Width (inches)	1.417 inch
Net weight	351 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

General data

Colour	orange, black, blue	Design	Installation housing; 2TE, Insta IP 20
Operating altitude	≤ 2000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20 in installed state	Rail	TS 35
Segment	Power distribution	UL 94 flammability rating	V-0
Version	without telecomm. contact, Leakage-current-free, Surge protection		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	IV

Rated data IEC / EN

Discharge current I_{max} (8/20µs) wire-PE	65 kA	Discharge current I_{max} (8/20µs) N-PE	150 kA
Discharge current I_n (8/20µs) N-PE	100 kA	Discharge current I_n (8/20µs) wire-PE	25 kA
Discharge current, I_{imp} (10/350 µs)	25 kA	Energy coordination (≤10 m)	Type I, Type II, Type III
Follow-on current extinguishing capability I_{fi}	50 kA	Frequency range, max.	60 Hz
Frequency range, min.	50 Hz	Fuse	No Fuse neccessary ≤315 A gL
Leakage current at U_n	1 µA	Lightning test current I_{imp} (10/350 µs) (L-PE)	25 kA
Lightning test current, I_{imp} (10/350 µs) (N-PE)	100 kA	Low voltage network	Single-phase, TN, TT, IT with N, IT without N
Mains voltage	240 V	Max. continuous voltage, Uc (AC)	275 V
Max. continuous voltage, Uc (N-PE)	305 V	Note follow current capability	No tripping of a 16 A gG fuse up to prospective 50 kA_{eff}
Number of poles	2	PE conductor current I_{PE}	1 µA
Protection level U_p at I_N (L/N-PE)	≤ 1.5 kV	Protection level U_p at I_N (N-PE)	≤ 1.5 kV
Rated voltage (AC)	240 V	Requirements category acc. to IEC 61643-11	Type I, Type II
Requirements class, acc. to EN 61643-11	T1, T2	Response time	< 100 ns
Short-circuit current rating I_{SCCR}	50 kA	Signalling contact	No
Standards	IEC61643-11, EN61643-11	Temporary surge voltage (over-voltage) - TOV	442 V
Voltage type	AC		

VPU AC I 1+1 275/25 LCF S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Connection data

Wire connection method	Screw connection	Type of connection	Screw connection
Stripping length, rated connection	15 mm	Tightening torque, min.	2.5 Nm
Tightening torque, max.	4.5 Nm	Clamping range, rated connection	16 mm²
Clamping range, min.	4 mm²	Clamping range, max.	35 mm²
Wire cross-section, solid, min.	2.5 mm²	Wire cross-section, solid, max.	35 mm²
Wire connection cross section, finely stranded, min.	2.5 mm²	Wire connection cross section, finely stranded, max.	35 mm²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	2.5 mm²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	35 mm²
Connection cross-section, stranded, min.	2.5 mm²	Connection cross-section, stranded, max.	35 mm²

Guarantee

Time interval	5 years

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05		

Important note

Product information	Only applicable to IT power systems where the earth on the distribution transformer is interconnected with the earth on the consumer side (RE=RA in Figure 44.A1 of IEC 60634-4-44:2018). For use in DC applications, please use the fuse of SIBA Type NH2XL aR/aSF DC 1500 V

Approvals

Approvals	CE
ROHS	Conform

Downloads

Approval/Certificate/Document of Conformity	EU_Konformitätserklärung / EU_Declaration_of_Conformity
Engineering Data	STEP
Tender specification	Ausschreibungstext DE Tenderspecification EN
User Documentation	Beipackzettel / Instruction sheet
Catalogues	Catalogues in PDF-format


VPU AC I 1+1 275/25 LCF S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol

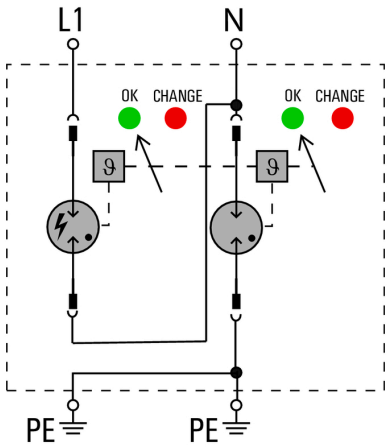

Schematic circuit diagram