


NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55℃ to +105℃

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0
 Shell: Cold Roller Steel, Ni Or Sn Plated
 Nut: Brass, Sn Over Ni Plated

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

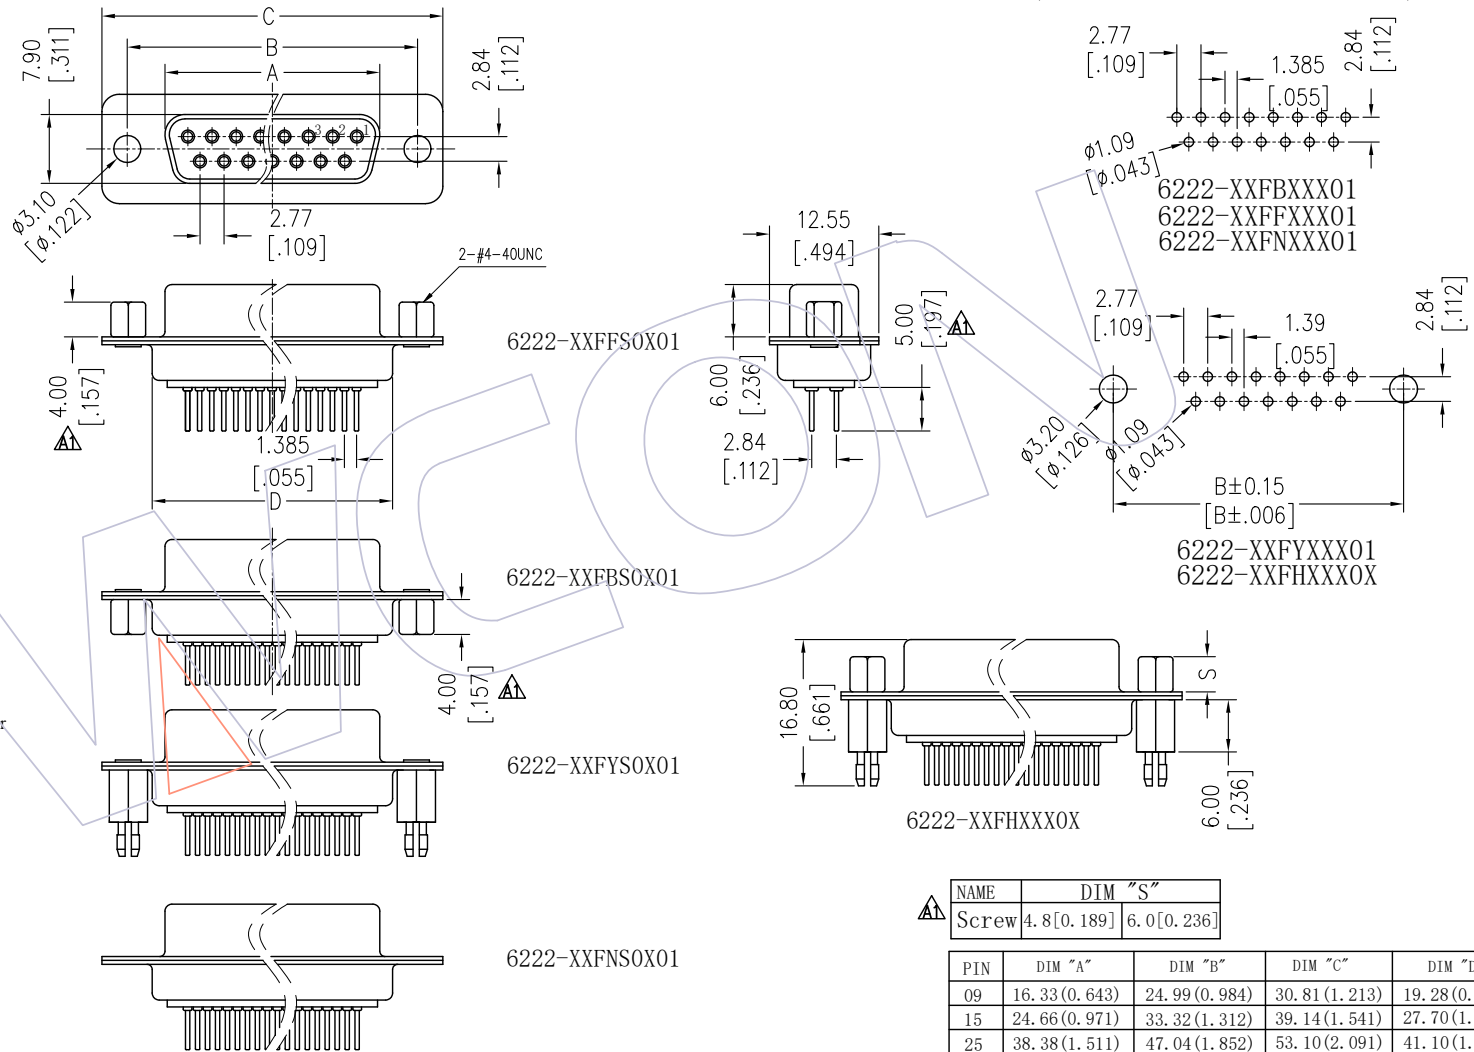

Ordering Information

6222-XX F X XX B 0X

No. of Pins	Type	Contact Plating	Insulator Color
9P	Y=With Back Fork	S0=Gold Flash/Tin	B:Black
15P	B=With Back Nut	S3=10u"Gold/Tin	U:Blue
25P	F=With Front Nut	S4=15u"Gold/Tin	
37P	H=With Back Fork and Screw	S5=30u"Gold/Tin	
	N=Without Fork and Nut	SN=Tin	

NAME	DIM "S"	
Screw	4.8[0.189]	6.0[0.236]

PIN	DIM "A"	DIM "B"	DIM "C"	DIM "D"
09	16.33(0.643)	24.99(0.984)	30.81(1.213)	19.28(0.759)
15	24.66(0.971)	33.32(1.312)	39.14(1.541)	27.70(1.091)
25	38.38(1.511)	47.04(1.852)	53.10(2.091)	41.10(1.618)
37	54.84(2.159)	63.50(2.500)	69.32(2.729)	57.30(2.256)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	Dwg	2019/05/15	UNIT	mm	6222-XXFXXX0X
A1	2019/05/15	Modify DIP	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: D-SUB FEMALE DUAL ROW 180° DIP
AO	2012/12/04	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com