

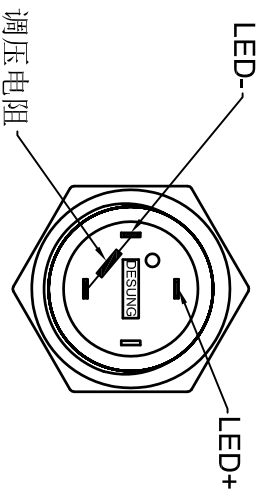


- 备注:
1. 外壳镗雕A3;
  2. 拧螺母，配垫圈。

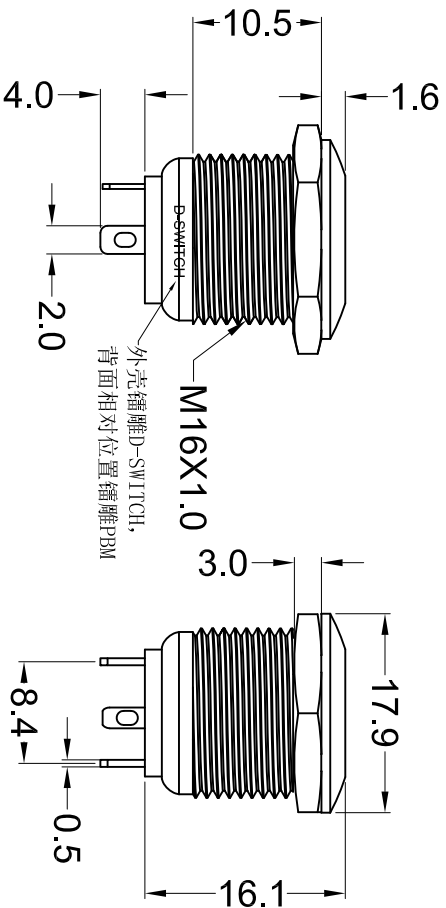

Nut Torque: 5~14Nm  
 Protection Grade: IP65, IK08  
 Shell: Brass, Ni Plating  
 Base: PBT+15%GF  
 Lamp Type: LED  
 Forward current : 20mA Max  
 Lamp Life: 50000H  
 Beads Color: Green  
 Lamp voltage: 12V DC  
 Operating Temperature: -20°C~80°C  
 Relative Air Humidity: 45%~85%  
 Safety Approval:

CUT-OUT  $\pm 0.1$   
 $\phi 16.1 \pm 0.05$

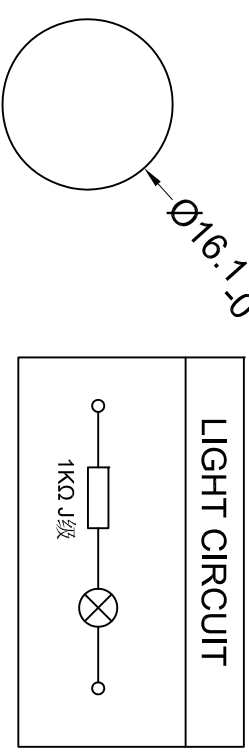

**D-SWITCH**  
 东莞市德祿电子有限公司  
 D-SWITCH ELECTRONICS CO.,LTD

公差 TOLERANCES: .X $\pm$ 0.5 .XX $\pm$ 0.3 角度 ANGLE  $\pm 1^\circ$  单位 DIMENSION UNIT mm.

版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECON NO.	核准	核对	绘图	品名 TITLE	图号 DRAWING NO
				APPROVED BY	CHECKED BY	DRAWN BY	PBM-16111-FS-G1-A12-88S-A3-0004	1030433
						孙成		