



Features
<ul style="list-style-type: none"> GSM Outdoor Antenna Stable And Reliable Performance 880-960 & 2170MHz


Applications
<ul style="list-style-type: none"> Wireless Communication GSM Vehicle Monitoring Machine To Machine Communication

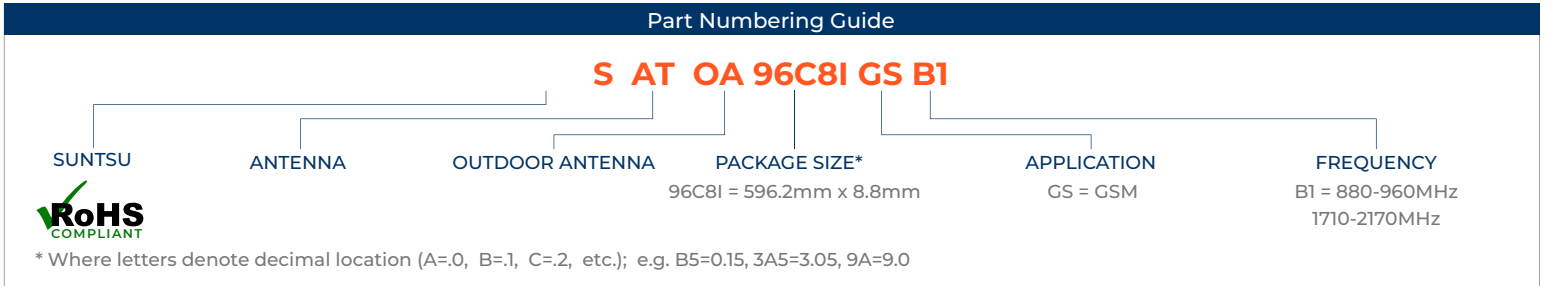

Electrical Parameters (WiFi)	Units	Minimum	Typical	Maximum	Remarks
Frequency Band	MHz	880		960	
Impedance	Ω		50		
Polarization			Linear		
Peak Gain	dBi		2		At Center Frequency
VSWR				2	At Center Frequency
Frequency Band	MHz	1710		2170	
Impedance	Ω		50		
Polarization					
Peak Gain	dBi		2		
VSWR				2	At Center Frequency
Operating Temperature	C	-40		85	

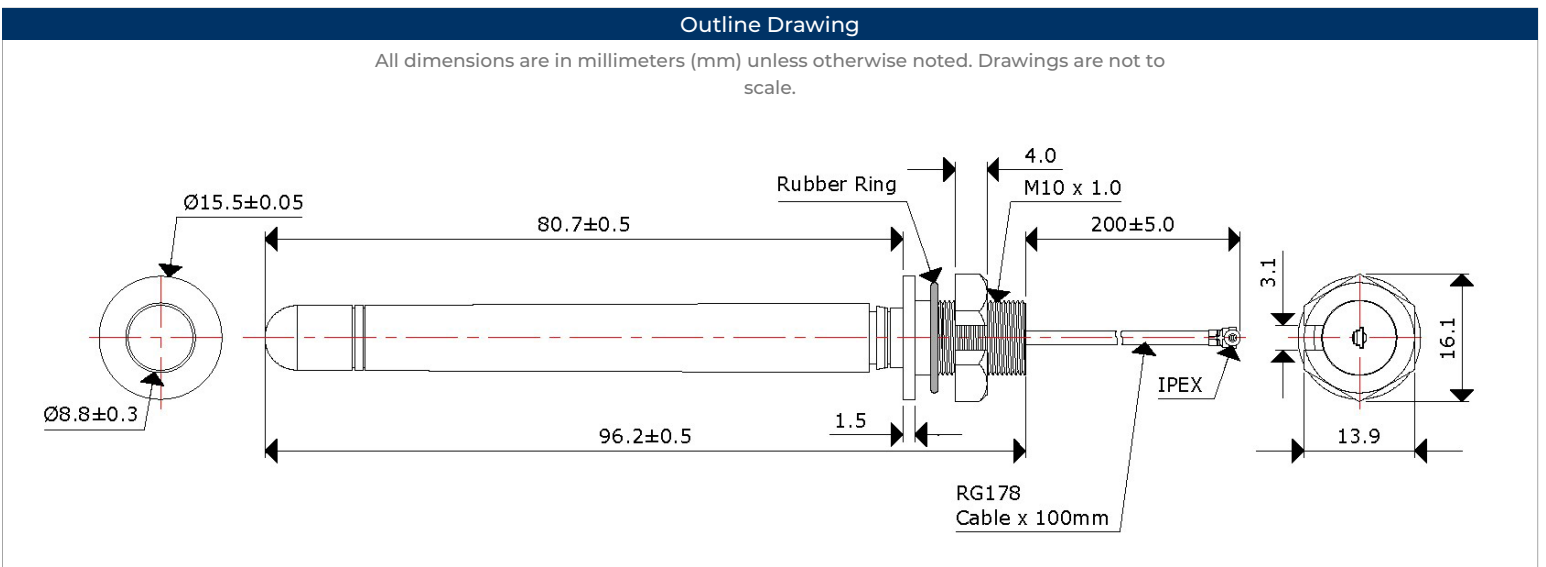

Radiation Pattern

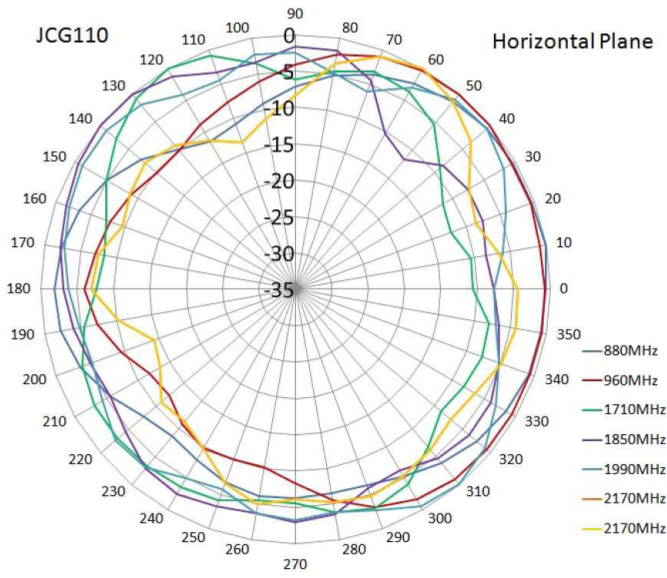

Radiation Pattern

