



**DESCRIPTION:**

**30W AC-DC DIN RAIL Power Supply**

The rated output power of TPR/DG-30-XS series is 30W, input voltage range : 90-264VAC, output voltage : 12V, 24V. High reliability, precision, efficiency, ultra-small size, stable output voltage and etc, with short circuit & overload protection, Widely used in telecommunications, industrial control, instrument, data acquisition, signal control, New Energy, Security, and other electronic systems.

**FEATURES**

AC input : 90VAC-264VAC, DC input: 127-370VDC	100% full load burn-in test	Operating temperature : -25°C ~70°C
Mounting track: TS-35/7.5 or TS-35/15	Protection: short circuit, over-load, over-voltage	Mini width: 32mm
RoHS complaint	High reliability, efficiency, long life	Built-in current limiting circuit

**SELECTION GUIDE**

Part Number	Input Voltage			Output			Efficiency @25°C, (Typ) %	
	(VAC)		(VDC)	Voltage (VDC)	Pre-set voltage @25°C (V)	Rated current (A)		Rated power(W)
	Rated	Range	Rated					
TPR/DG-30-12S	220	90-264	127-370	12	12.00-12.20	2.5	30	82
TPR/DG-30-24S	220	90-264	127-370	24	24.00-24.20	1.25	30	85

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

**OUTPUT CHARACTERISTICS**

Conditions	Conditions	Parameter
Output voltage regulation	12V output voltage	12-14V
	24V output voltage	24-28V
Rated Output current	12V output voltage	2.5A at 12V
		2.15A at 14V
	24V output voltage	1.25A at 24V
		1.08A at 28V
Rated Output power	12V output voltage	15W/12V 15.12W/14V
	24V output voltage	15.6W/24V, 15.4W/28V
Ripple&Noise 10<Ta≤70°C	output voltage	≤50mVp-p @12V ≤70mVp-p @24V
Ripple&Noise -25<Ta≤10°C	output voltage	≤100mVp-p @12V ≤140mVp-p @24V
Capacitive load capacity	output voltage	3000uF @12V 1500uF@24V
Voltage regulation accuracy @-25~70°C		± 1.0%
Line regulation @-20~65°C		± 0.5%
Load regulation @-20~65°C		± 1.0%
Temp. coefficient @-20~65°C		± 0.03%/°C
Set-up time @25°C		≤1500mS@(230Vac input, Rated load)
Hold-up time @25°C		≥20mS@(230Vac input, Rated load)
Overshoot&Undershoot		<5.0%
Capacitive load capacity		3000uF@12V 1500uF@24V

**INPUT CHARACTERISTICS**

Conditions	Parameter
Rated Input voltage range	100VAC~240VAC
Input voltage range	90VAC~264 VAC
Input voltage range	127VDC-370VDC
Frequency Range	47Hz~63Hz
Set-up voltage @-20~65°C	<90 VAC <127VDC
Input current @25°C	<0.8 A/ AC input ; 0.3A/127VDC 0.15A/300VDC
Inrush current @25°C	50A@230 Vac input

**PROTECTION**

Conditions	Parameter	Notes
Over-Load (12Voutput)	1.5~2.5A	Limit output current , hiccup mode, auto recovery
Over-Load (24Voutput)	3.0~4.0A	
Over-voltage (12Voutput)	15~16.8V	Constant voltage, auto recovery
Over-voltage (24Voutput)	28.8~31.2V	
Output short circuit protection	Long-term model , auto recovery	

**ENVIRONMENT CHARACTERISTICS**

Conditions	Parameter
Operating amb. Temp.&Humi. (12V 24V output)	-25℃~70℃; 20%~90%RH No condensing 60℃~70℃
Storage Temp. & Humi.	-40℃~85℃; 5%~95%RH No condensing
Vibration	10 ~ 500Hz, 2G, 10min./1cycle, each along X,Y, Z axes IEC 60068-2-6
Pulse	20G/11mS pulse ,3 times at each X,Y,Z axes IEC 60068-2-27
Altitude	2000m

**SAFETY&EMC STANDARDS @25℃**

Conditions	Parameter
Safety Standards	GB4943 ,EN60950(for reference)
Withstand Voltage	I/P-O/P:3.0KVac/10mA; I/P-PE:1.5KVac/10mA; O/P-PE:0.5KVdc/10mA Test time:1min.
Isolation resistance	I/P-O/P: 10M ohms; I/P-PE: 10M ohms; O/P-PE : 10M ohms
Grounding test	Test condition: 32A / 2min.; Grounding resistance: <0.1 ohms
Leakage Current @ 25℃	I/P-Grounding≤3.5mA; I/P-O/P ≤0.25mA (264Vac input, 63Hz)
EMC emission	Compliance to EN55022, EN55024, CLASS B
EMC immunity	Compliance to EN61000-4-2,3,4,5,6,11 heavy industry level
Harmaonic current	EN61000-3-2, CLASS A



**OTHERS**

Conditions	Parameter
Net Weight	0.19kg
Dimension (L*W*H)	103.7*32*97.5mm
Cooling method	Cooling by free air flow
Series / parallel function	yes
Output indicator	Green light

**RELIABIILITY CHARACTERISTICS**

Conditions	Parameter
MTBF	590, 000Hrs AT 25℃, Telcordia SR332
Design electrolytic capacitor life-time	>3years AT 50℃ 230VAC input @12V 2.5A output @24V 1.25A output

**MECHANICAL DIMENSIONS**

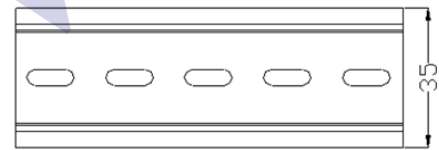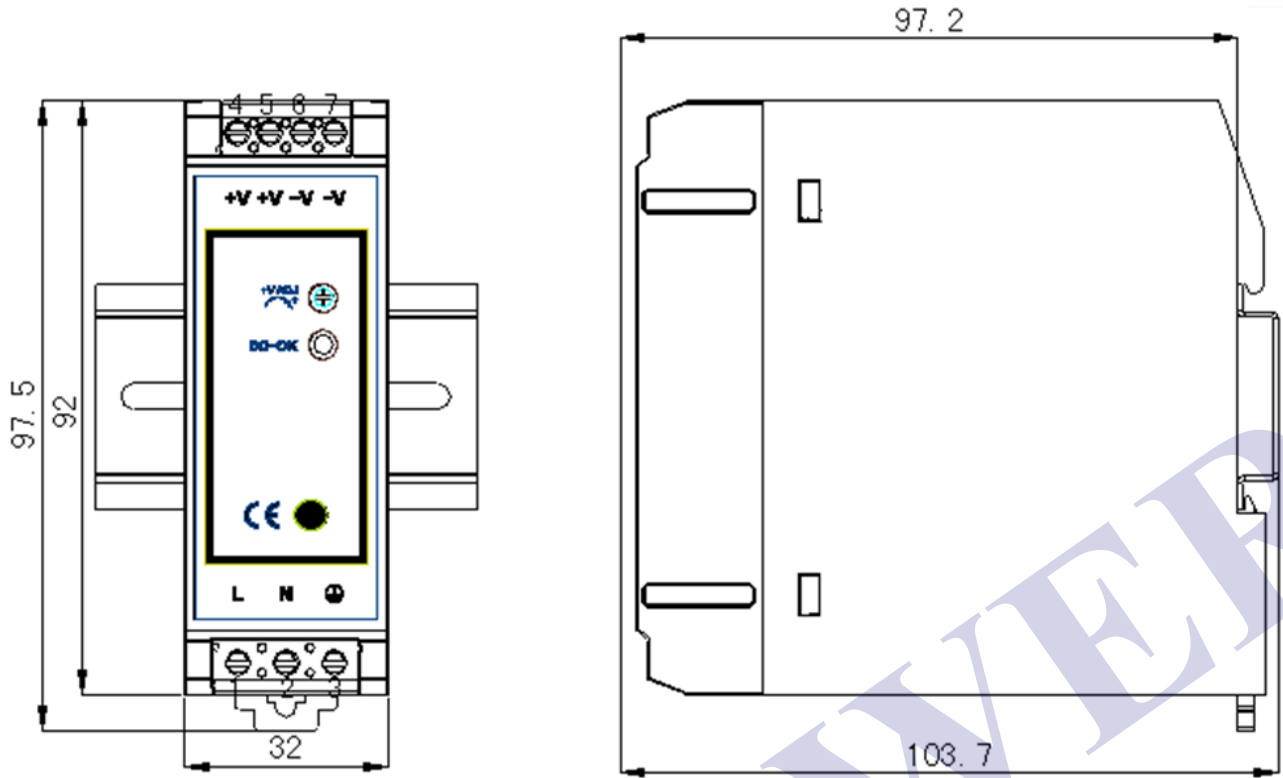


Mounting way: TS35/7.5 or TS35/15

1.AC Screw terminal information			
No.	Function	Wire Specs	Recommended torque
1	L	26-12AWG	0.5Nm
2	N		
3	PE		


2.DC Screw terminal information			
No.	Function	Wire Specs	Recommended torque
4	V+	26-12AWG	0.5Nm
5			
6	V-		
7			

	AC Terminal	DC Terminal
Type	Screw terminal blocks	
Solid Wire	0.32-2.5mm <sup>2</sup>	0.65-2.5mm <sup>2</sup>
Strand Wire	0.32-2.5mm <sup>2</sup>	0.65-2.5mm <sup>2</sup>
Wire Spec	AWG26-12	
Max Wire Diameter	2.05mm	
Recommended stripping length	6-7mm	
Screwdriver	3.5mm Straight Screwdriver	
Recommended Torque	0.5NM	

12V

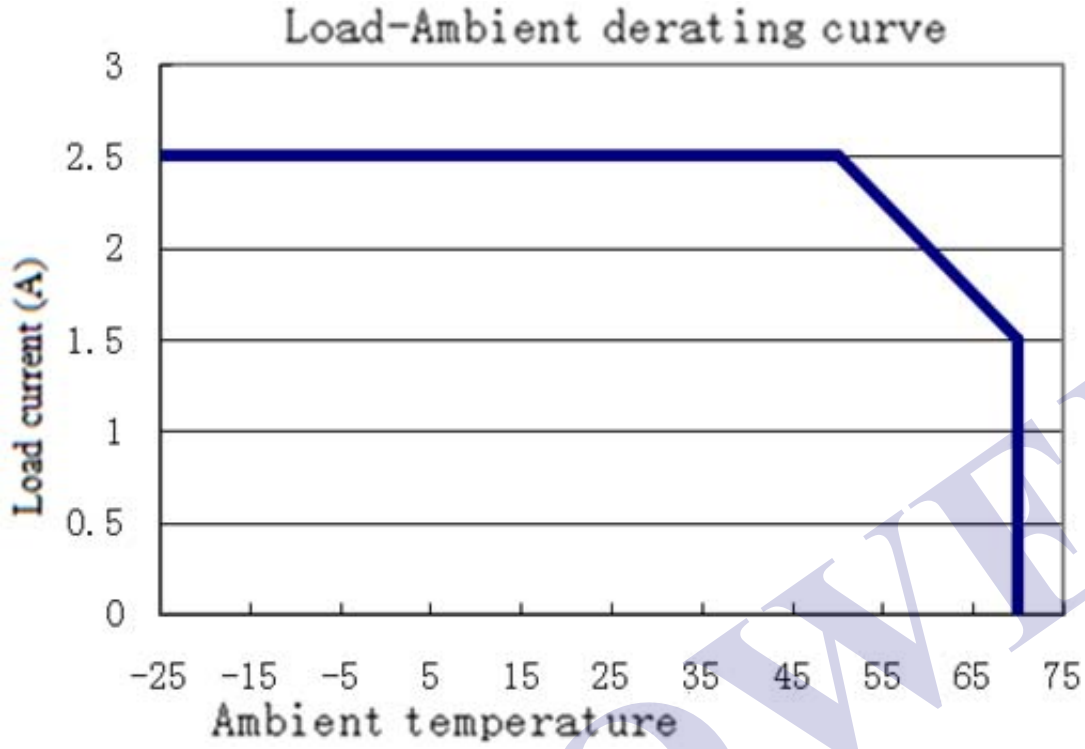

24V


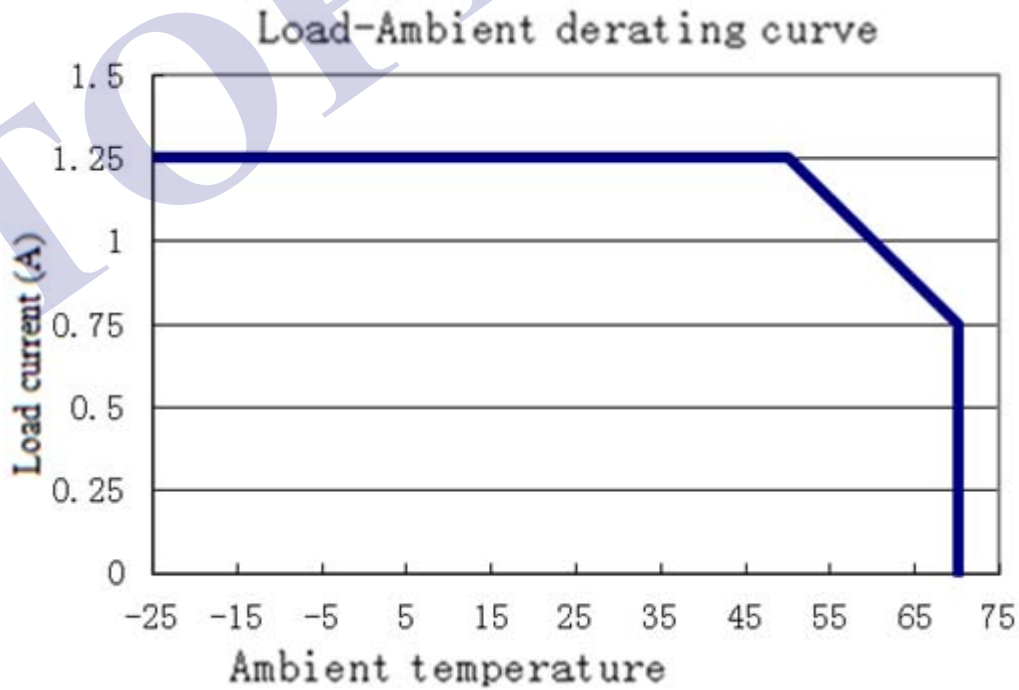


**MOUNTING METHOD INSTRUCTION**



A1 is recommended output current , A2 is the allowed max output current (PSU lifetime is around half of A1)

**12V output**



**Mounting 1:**

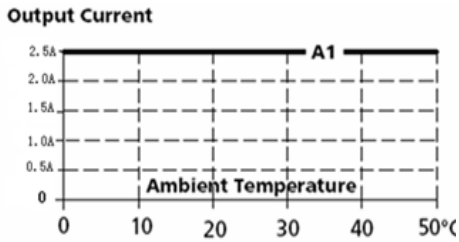



**Mounting 2:**

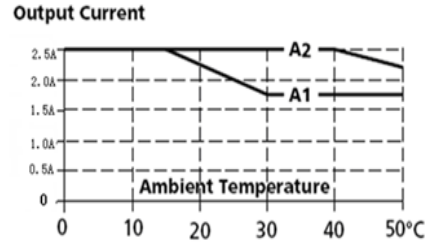



**Mounting 3:**

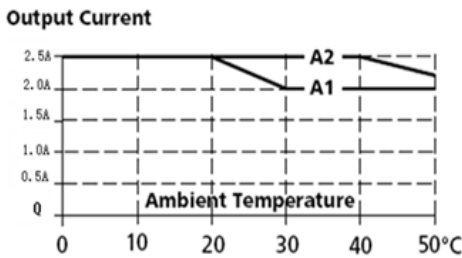

**Mounting 4:**

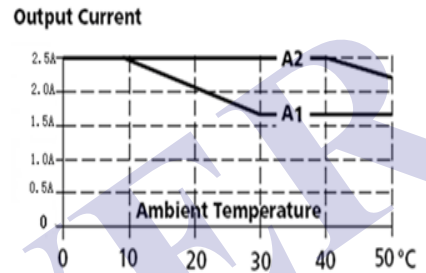



**Mounting 5:**

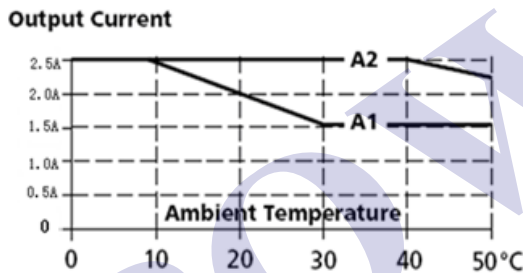



**24V output**



**Mounting 1:**

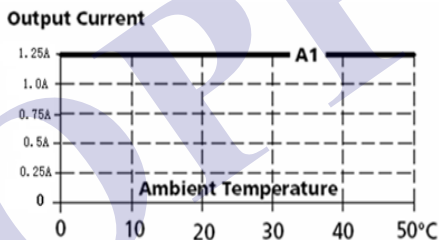



**Mounting 2:**

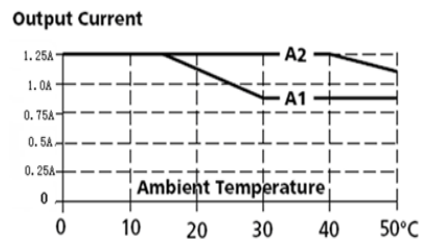



**Mounting 3:**

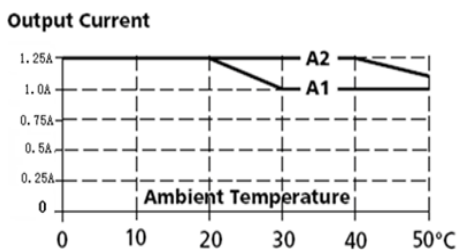


**Mounting 4:**

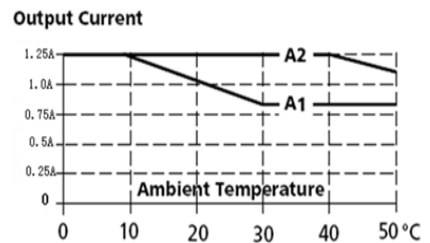

**Mounting 5:**

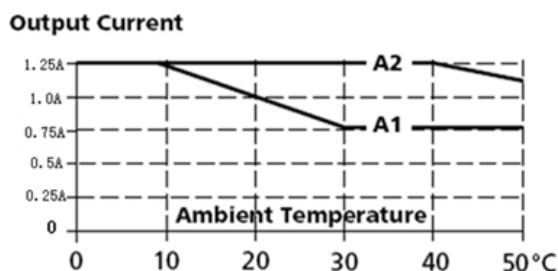


**BLOCK DIAGRAM**

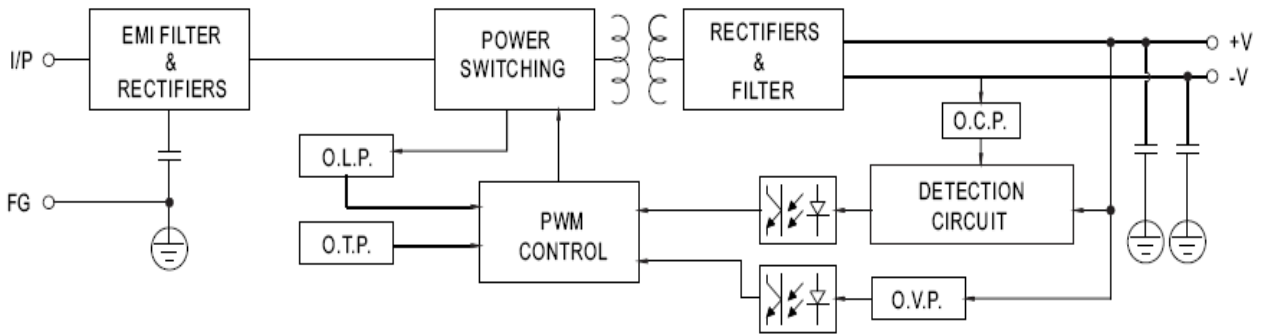

**MODEL SELECTION**

**TP C / DG - 30 - X S**

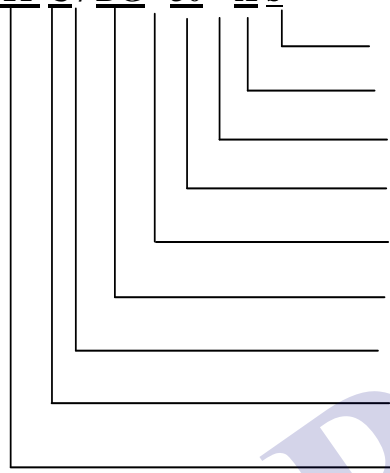

- S: Single output; D: Dual output
- Output voltage
- Delimiter
- Rated output Power
- Delimiter
- DIN RAIL Series
- Delimiter
- Type
- Brand
- TOPPOWER