Major League Electronics .100 cl Socket Strips Right Angle using .025" sq. pins

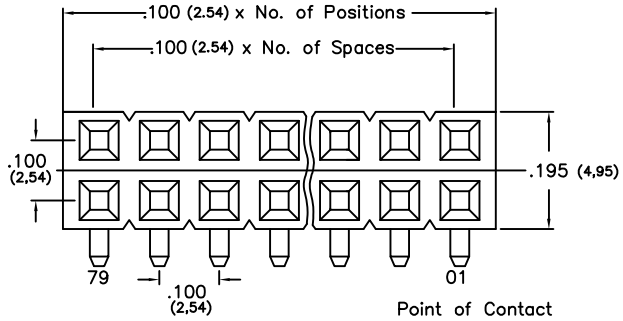

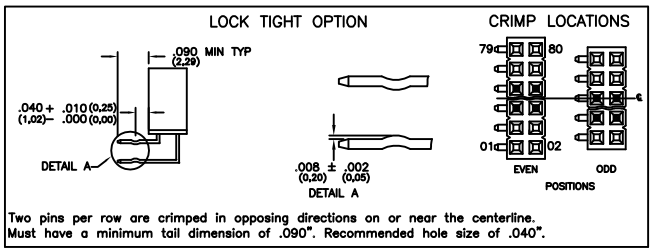

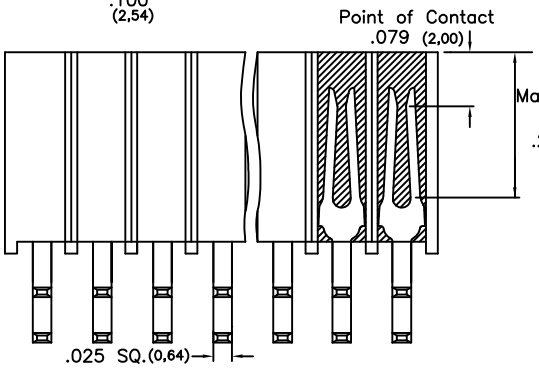

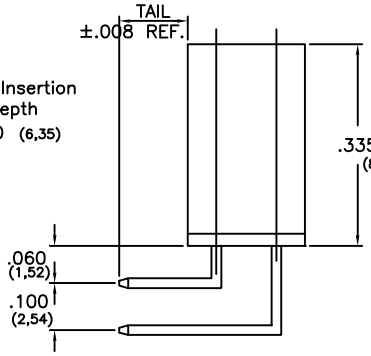

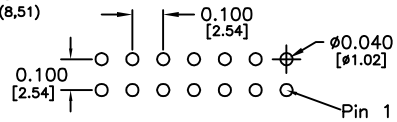

Tails may be clipped to achieve desired pin length

Ordering Information

SSHQR-1 [XX] – [D] – [XX] – [XX] – [XX] – [XXX] – [LF]

- Pins Per Row: 01-40
- Row Specification: D = Dual Row
- Pin Option:

Pin Option		
Tail		
.100	2.54mm	02
.290	7.37mm	04

- Lead Free
- Polarized Position: Leave blank if not needed. If required, specify empty pin position, e.g. 012 for Pin 12
- Lock Tight "LT" (Optional): Leave blank if not needed. LT = With

	Plating Options
G	- 10µ Gold on Contact area/Flash on Tail
T	- Matte Tin all Over
GT	- 10µ Gold on Contact Area / Matte Tin on Tail
H	- 30µ Gold on Contact Area / Matte Tin on Tail
F	- Gold Flash over Entire Pin

Specifications
Insertion Depth: .145 (3,68) to .250 (6,35)
Insertion Force - Per Contact - H Plating:
6oz. (1,67N) avg with .025 (0,64mm) sq. pin
Withdrawal Force - Per Contact - H Plating:
5oz. (1,39N) avg with .025 (0,64mm) sq. pin
Current Rating: 3.0 Ampere
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20 mΩ Max.
Operating Temperature: -40°C to + 105°C
Max. Process Temperature:
Peak: 260°C up to 20 secs.
Process: 230°C up to 60 secs.
Wave: 260°C up to 6 secs.
Manual Solder: 350°C up to 5 secs.

Materials
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T
Plating: Au or Sn over 50µ" (1,27) Ni



Mates with:

BSTC,	TSHCR,
BSTCM,	TSHCRE,
BSTCR,	TSHCRSM,
BSTCRSM,	TSHR,
BSTS,	TSHRE,
LBSTCM,	TSHS,
LTSHCR,	TSHSCM,
LTSHCRE,	TSHSM,
LTSHR,	ULTSHSM,
LTSHRE,	ULTSHC,
LTSHSM,	ULTHSCR
TSHC,	

Products cut to specific sizes are uncancellable/nonreturnable — Parts are subject to change without notice

SSHQR-1-D SERIES	.100 cl Dual Row - Right Angle Socket Strips using .025" sq. pins	18 JAN 07	Scale NTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES (MM) TOLERANCES ARE:
ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.0020
ANGLES ±5°

Major League ELECTRONICS
4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Edition 1

Sheet 1/1