
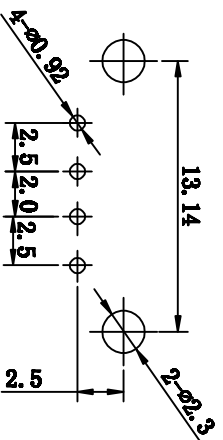
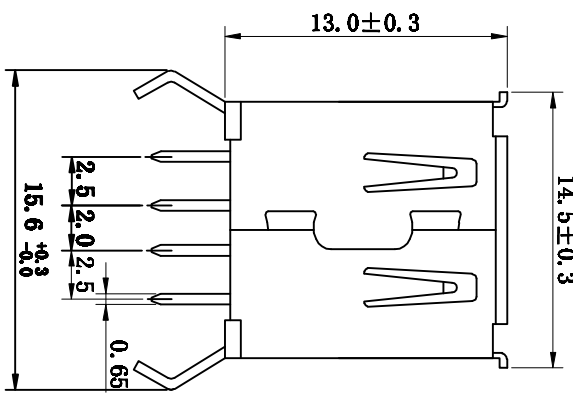
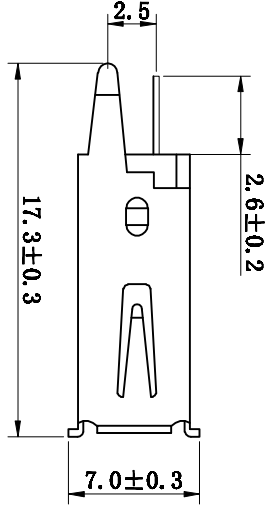


客户确认
日期



Specifications:

Electrical:
 Contact Resistance: 30 milliohms MAX
 Dielectric Withstanding Voltage: 500V AC AT Sea Level
 Insulation Resistance: 1000 MEGA ohms MIN.
Mechanical:
 Mating Force: 4.0KG MAX
 Unmating Force: 0.7KG MIN
Material:
 Housing: High Temperature Thermoplastic UL94V-0
 Contact: Copper Alloy
 Shell: Copper Alloy
Finish:
 Contact: plated Gold in Mating Area;
 Tin/Lead On Solder Tails
 Shell: Tin/Lead plating
 Nickel plating

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	C 深圳市灿科置实业有限公司 KANTW CHANKKENG INDUSTRY CO., LTD
CHECKED:	DATE:	
DRAWN:	DATE:	TITLE: USB-A/R-1*4P H=13.0mm 180度直插 铜 DIP 插头
LXF	2009-07-20	CLIENT P/N: C3902703 UNIT: mm SCALE: free FILE NO.: U-USBAS04P-F002 REV: A HF00

PCB Layout