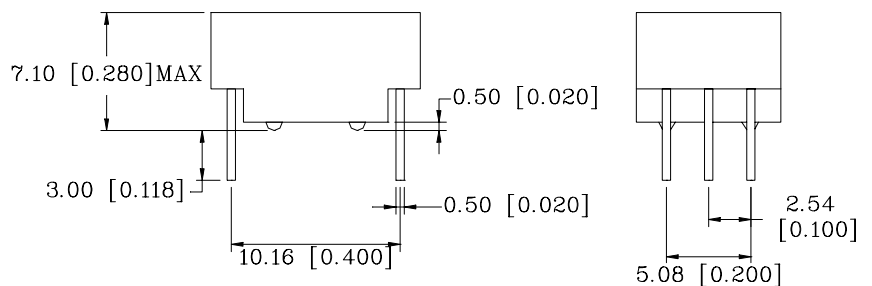
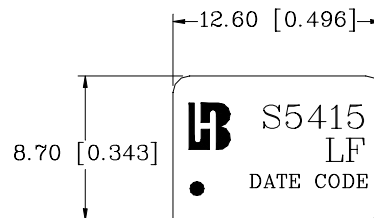
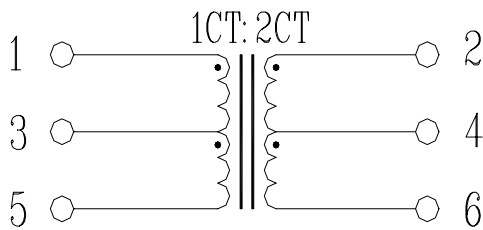


**P/N: S5415 LF DATA SHEET****Feature**

- Models matched to leading transceiver ICs.
- Dual and single through hole models available
- Isolation HI-POT: 1500Vrms Min.
- Lead free for external pins.
- Operating temperature range: 0 to +70 .
- Storage temperature range: -25 to +125 .

Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)	OCL (mH Min) @100KHz/0.2V	C _{www} (pF Max)	L.L (uH Max)	DCR (Ω Max) PRI&SEC	PRI PINS
S5415 LF	1CT:2CT	1.2	30	0.5	0.7/1.2	1-5

Schematic**Mechanical**

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]