

CAxxxx Cables

Technical Datasheet

CA0001



For LWC-L Battery (UBBL01)

Battery Connector	LEMO FGG 0B 305 CLA
Cable Length	CA0001: 61 cm. (24 in.) nominal CA0001-01: 100 cm. (39.36 in.) nominal CA0001-02: 200 cm. (78.74 in.) nominal
Cable Type	2 Conductor; 22 AWG; red positive, black negative
Insulation	Foil shielded black PVC

CA0002



For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, UBBL13-01-CB, UBBL18, UBBL38, UBBL62)

Cable Length	CA0002: 61 cm. (24 in.) nominal CA0002-01: 100 cm. (39.36 in.) nominal CA0002-02: 200 cm. (78.74 in.) nominal CA0002-03: 183 cm. (72.00 in.) nominal
Cable Type	4 Conductor; 18 AWG
Pin/Wire Color Key	Pin 1 Black, Pin 2 White, Pin 4 Red, Pin 5 Green
Insulation	Black type SJOOW rubber

Pin 1	Black
Pin 2	White
Pin 4	Red
Pin 5	Green

CA0002P-XX



For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, UBBL13-01-CB, UBBL18, UBBL38, UBBL62)

Cable Length	CA0002P-01: 100 cm. (39.37 in.) nominal CA0002P-02: 200 cm. (78.74 in.) nominal CA0002P-03: 183 cm. (72.00 in.) nominal CA0002P-04: 61 cm. (24.00 in.) nominal
Cable Type	4 Conductor; 18 AWG
Pin/Wire Color Key	Pin 1 Black, Pin 2 White, Pin 4 Red, Pin 5 Green
Insulation	Black type SJOOW rubber

Pin 1	Black
Pin 2	White
Pin 4	Red
Pin 5	Green




CA0005



Pin 1	
Pin 2	
Pin 3	
Pin 4	
Pin 5	

For UBL03 Battery (Type LI-7)

Battery Connector	JBXFD1G05MCSDSMR
Cable Length	CA0005: 61 cm. (24 in.) nominal CA0005-01: 100 cm. (39.36 in.) nominal CA0005-02: 200 cm. (78.74 in.) nominal
Cable Type	5 Conductor, 20 AWG
Pin/Wire Color Key	Pin 1 Red, Pin 2 Green, Pin 3 White, Pin 4 Black, Pin 5 Blue
Insulation	Foil shielded black PVC

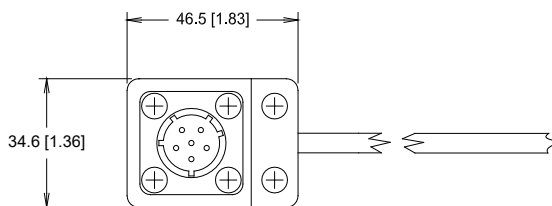

CA0006: 24V



For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, UBBL13-01-CB, UBBL18, UBBL62)

Cable Length	CA0006: 61 cm. (24 in.) nominal CA0006-01: 100 cm. (39.36 in.) nominal CA0006-02: 200 cm. (78.74 in.) nominal
Cable Type	24V, 2 Conductor; 18 AWG
Pin/Wire Color Key	Pin 4 White/positive, Pin 2 Black/negative
Insulation	Black type SJ rubber

CA0007: 12V



For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, UBBL13-01-CB, UBBL18, UBBL38, UBBL62)

Cable Length	CA0007: 61 cm. (24 in.) nominal CA0007-01: 100 cm. (39.36 in.) nominal CA0007-02: 200 cm. (78.74 in.) nominal
Cable Type	12V, 2 Conductor; 18 AWG
Pin/Wire Color Key	Pins 4 & 5 White/Positive, Pins 1 & 2 Black/Negative
Insulation	Black type SJOOW rubber

CAxxxx

Newark, New York | +1 315-332-7100 | Fax: +1 315-331-7800

©2021 Ultralife Corporation • www.ultralifecorp.com • All information is subject to change without notice.

The information contained herein is for reference only and does not constitute a warranty of performance • 26 MAY 21 UBM-5118 Rev: R

CA0008:12/24V



Pin 1	
Pin 2	
Pin 4	
Pin 5	

For UBI-2590 Battery (UBBL02-01, UBBL02-01-CB, UBBL10-01, UBBL10-01-CB, UBBL13-01, UBBL13-01-CB, UBBL18, UBBL38, UBBL62)

Cable Length	CA0008: 61 cm. (24 in.) nominal CA0008-01: 100 cm. (39.36 in.) nominal CA0008-02: 200 cm. (78.74 in.) nominal
Cable Type	12/24V, 4 Conductor; 18 AWG
Pin/Wire Color Key	Pin 1 Black, Pin 2 White, Pin 4 Red, Pin 5 Gray
Insulation	Black type SJ rubber