

AVD50 Series

50 Watts

Data Sheet


Total Power: 50 Watts
Input Voltage: 36 - 75V
of Outputs: Single

SPECIAL FEATURES

- 2:1 Wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Pre-bias start-up capability
- Basic insulation system
- Through-hole or SMT termination
- Openframe structure

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

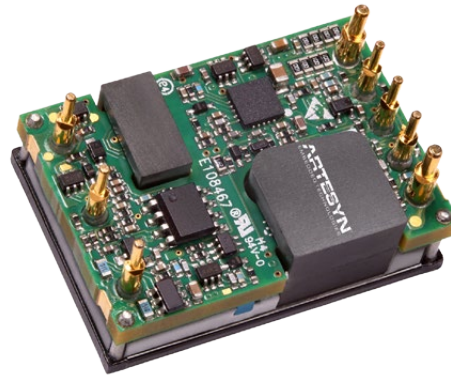

Electrical Specifications

Input	
Input range	36 - 75 VDC
Efficiency	90.5%
Output	
Maximum power	±2.0% @ 5 V; +/-1.5% @ 3.3 V
Line regulation	0.5%
Load regulation	Single output: 0.5%
Noise/ripple	3.3 Vo: 70 mV 5.0 Vo: 50 mV
Over voltage protection Over temperature protection	Auto-restart
Switching frequency	3.3 V: 420 KHz, 5 V: 250 KHz
Temperature coefficient	±0.02 /°C
Isolation	
I/O isolation	1500 VDC min.

Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	2 Million hours
RoHS Compliant	


Ordering Information

Model number	Input voltage	Output voltage	Power
AVD50B-48S3V3TL	36 - 75 V _{in}	3.3 V @ 15 A	49.5 W
AVD50B-48S3V3-6L	36 - 75 V _{in}	3.3 V @ 15 A	49.5 W
AVD50-48S05-6L	36 - 75 V _{in}	5 V @ 10 A	50 W
AVD50-48S05P-6L	36 - 75 V _{in}	5 V @ 10 A	50 W
AVD50-48S05SL	36 - 75 V _{in}	5 V @ 10 A	50 W

Notes:

- Standard version is negative enable
- "-6" = 3.8mm pin length
- "-T" = Surface mount, reel tape package
- "-S" = Surface mount, tray package
- "-L" = Rohs6 compliance
- "-P" = Positive enable

Mechanical Drawings

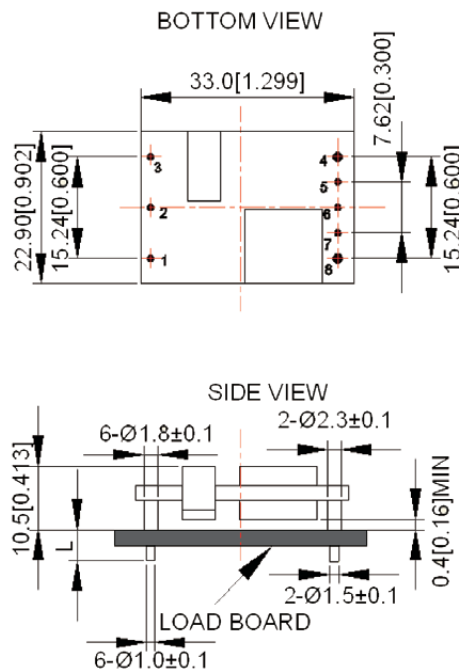

UNIT: mm[inch]

BOTTOM VIEW: pin on upsi

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 yr
3. Label and logo appearance may vary from what is shown on mechanical drawings.

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	- Sense
6	Trim
7	+Sense
8	+V out

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
 © 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com