Download from alldatasheet.com

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960


Silicon NPN Power Transistor — 2SC2928

DESCRIPTION

- High Collector-Emitter Sustaining Voltage-
  : $V_{CEO(SUS)}$= 800V (Min)
- High Switching Speed


APPLICATIONS

- Designed for high voltage, high speed and high power applications.

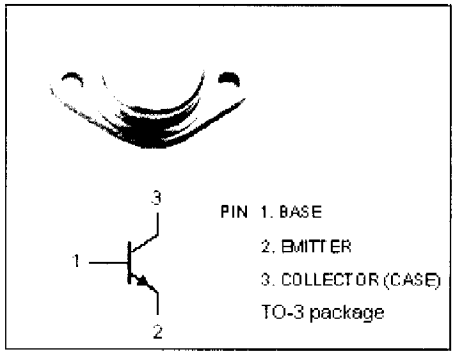

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	MAX	UNIT
V_{CBO}	Collector-Base Voltage	1500	V
V_{CEO}	Collector-Emitter Voltage	800	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current-Continuous	5	A
I_{CM}	Collector Current-Peak	7	A
I_B	Base Current-Continuous	2.5	A
P_C	Collector Power Dissipation @T_C=25℃	80	W
T_j	Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-45~150	℃

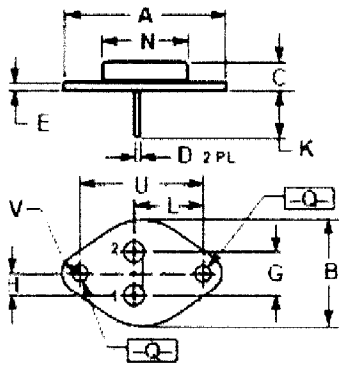

DIM	mm MIN	MAX
A	39.00	
B	25.30	26.67
C	7.80	8.50
D	0.90	1.10
E	1.40	1.60
G	10.92	
H	5.46	
K	12.50	13.50
L	16.75	17.05
N	19.40	19.62
Q	4.00	4.20
U	30.00	30.20
V	4.30	4.50

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

Download from alldatasheet.com

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustainig Voltage	I_C=1mA; I_B=0	800			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	I_E= 10mA; I_C= 0	7			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 1.5A; I_B= 0.3A			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	I_C= 1.5A; I_B= 0.3A			1.5	V
h_{FE-1}	DC Current Gain	I_C= 0.5A; V_{CE}= 5V	15			
h_{FE-2}	DC Current Gain	I_C= 3A; V_{CE}= 5V	7			
I_{CBO}	Collector Cutoff Current	V_{CB}= 1200V; I_E= 0			0.1	mA
I_{CEO}	Collector Cutoff Current	V_{CE}= 650V; R_{BE}= ∞			0.1	mA

Switching Times

t_{on}	Turn-On Time	I_C= 3A; I_{B1}= 0.6A; I_{B2}= -1.5A; V_{CC}≈ 250V			1.0	μ s
t_{stg}	Storage Time				3.0	μ s
t_f	Fall Time				1.0	μ s