

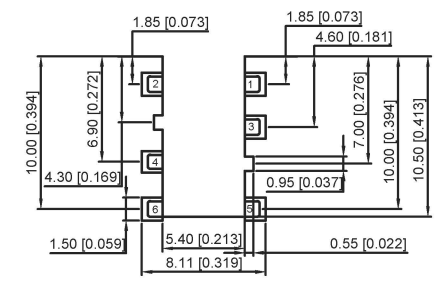


3D VIEW



P.C.B LAYOUT TOP VIEW

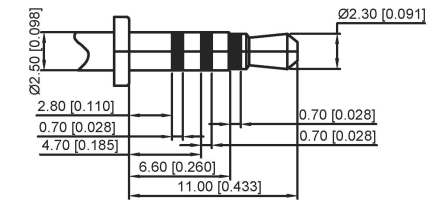

SCHEMATIC

(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)

- NOTES:
 1. REFER TO GWS025, REQUEST OF THE SPECIFICATION:
 (1) CONTACT RESISTANCE: 50mΩ MAX.;
 (2) INSULATION RESISTANCE: 100MΩ MIN.;
 (3) DIELECTRIC WITHSTANDING: 500V AC MIN.;
 (4) DURABILITY: SEE TABLE B;
 (5) CONNECTOR MATING FORCES: 2.94~29.4N (0.3~3.00Kgf);
 (6) CONNECTOR UNMATING FORCES: 2.94~29.4N (0.3~3.00Kgf);

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	Gold
terminal 2	Phosphor Bronze	Gold
terminal 3	Phosphor Bronze	Gold
terminal 4	Phosphor Bronze	Gold
terminal 5	Phosphor Bronze	Gold
terminal 6	Phosphor Bronze	Gold
plastic	High Temp. Thermoplastic	

广东星坤科技股份有限公司

生	日期
效	
Δx	
Δx	
Δx	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
					ANGLAR ±5°
					L ≤ 4 ±0.2
					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

文件工程章

REVISIONS
 www.helloxkb.com www.helloxkb.com www.helloxkb.com

DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.: PJ-2065-SMT
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0