


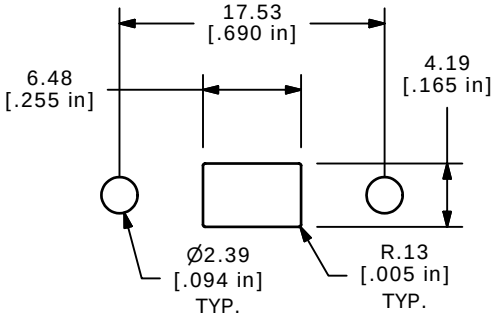


RECOMMENDED PANEL CUTOUT



RECOMENDED
P.C.B. LAYOUT

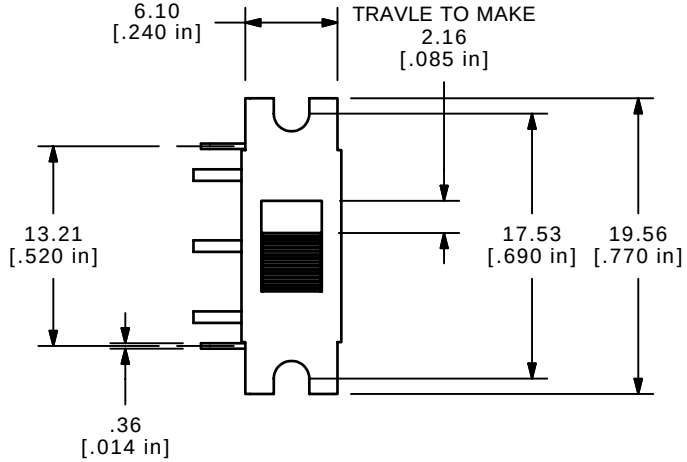





ISOMETRIC


▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-1	OPEN	2-3



CIRCUIT: SPDT

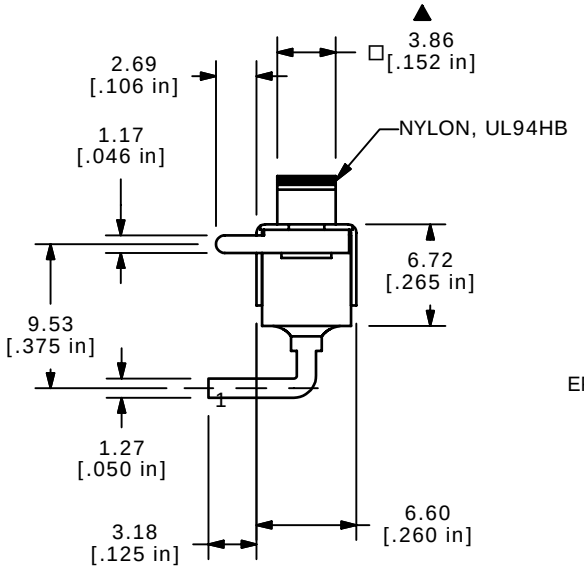

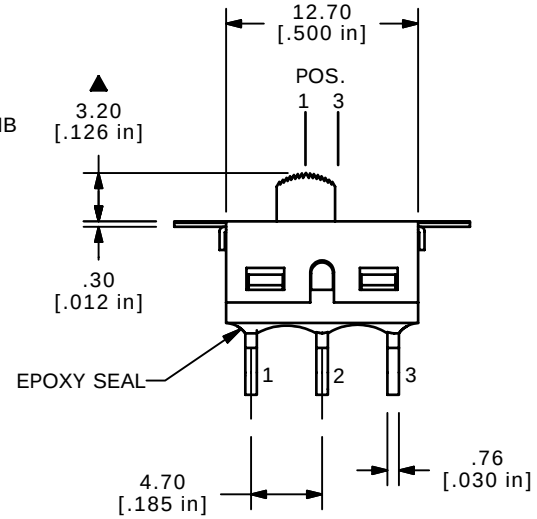

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. RATING: 2A @250VAC
   5A @120VAC OR 28 VDC
6. ELECTRIC LIFE: 30,000 ACTUATIONS
   AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

REV	PCR NO	DESCRIPTION	DATE	BY
B	15220	CHANGES TO NOTE 5	9/1/05	PH
A	15009	RELEASED FOR PRODUCTION	6/17/05	JB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 500SSP1S4M6QEB

SCALE	DATE	DR	DWG	REV
2:1	6/17/2005	JB	T507001	B