


產品編碼 P/N	PSPMAA201610~2213 Series	測試設備 TEST INSTRUMENT	Chroma 3302 16502
產品系列 Series	一体成型电感	測試頻率 TEST FREQUENCY	201610~252012: 1MHZ / 1V 0410~2213: 100KHZ / 1V

封裝尺寸 Dimension (mm)

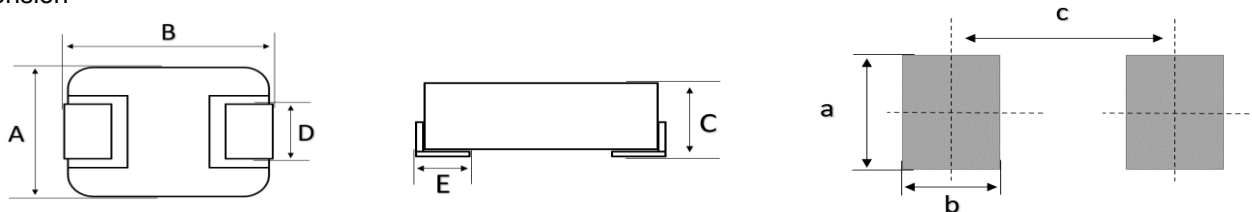

系列 Series	封裝尺寸 Dimension					焊盤尺寸 Land Pattern		
	A	B	C	D	E	a	b	c
1030	10.0±0.5	11.0±0.5	3.0MAX	3.0±0.5	2.0 ± 0.5	4.0 Typ	3.5Typ	9.5Typ
1040	10.0±0.5	11.0±0.5	4.0MAX	3.0±0.5	2.0 ± 0.5	4.0 Typ	3.5Typ	9.5Typ
1045	10.0±0.5	11.0±0.5	4.5MAX	3.0±0.5	2.0 ± 0.5	4.0 Typ	3.5Typ	9.5Typ
1050	10.0±0.5	11.0±0.5	5.0MAX	3.0±0.5	2.0 ± 0.5	4.0 Typ	3.5Typ	9.5Typ

1040~1045 Series

產品編碼 P/N	@ 25 °C Ambient Temperature					
	感值 Inductance	公差 Tolerance	DCR		溫升電流 (IRMS)	飽和電流 (ISAT)
			mΩ		A	A
	μH	±	Typ	Max	ΔT≈40°C	L0 drop≈30%
PSPMAA1040-R22M-ANP	0.22	20%	0.7	0.9	38.0	62.0
PSPMAA1040-R36M-ANP	0.36	20%	0.7	0.8	33.0	53.0
PSPMAA1040-R47M-ANP	0.47	20%	1.3	1.5	28.0	47.0
PSPMAA1040-R56M-ANP	0.56	20%	1.3	1.5	27.0	43.0
PSPMAA1040-R68M-ANP	0.68	20%	2.0	2.3	25.0	40.0
PSPMAA1040-1R0M-ANP	1.00	20%	2.5	3.0	19.0	32.0
PSPMAA1040-1R5M-ANP	1.50	20%	3.5	4.0	18.0	26.0
PSPMAA1040-2R2M-ANP	2.20	20%	5.9	6.5	14.0	24.0
PSPMAA1040-3R3M-ANP	3.30	20%	9.5	11.0	11.0	18.0
PSPMAA1040-4R7M-ANP	4.70	20%	12.0	13.5	10.0	15.0
PSPMAA1040-5R6M-ANP	5.60	20%	15.2	16.8	9.0	14.0
PSPMAA1040-6R8M-ANP	6.80	20%	19.0	20.1	8.5	13.0
PSPMAA1040-8R2M-ANP	8.20	20%	22.0	25.0	7.5	11.0
PSPMAA1040-100M-ANP	10.00	20%	29.5	33.0	7.0	10.0
PSPMAA1040-150M-ANP	15.00	20%	37.0	41.0	6.7	8.0
PSPMAA1040-220M-ANP	22.00	20%	55.0	60.0	6.0	6.5
PSPMAA1040-330M-ANP	33.00	20%	79.0	87.0	5.0	6.0
PSPMAA1040-470M-ANP	47.00	20%	118.0	139.0	4.0	5.5
PSPMAA1040-560M-ANP	56.00	20%	150.0	170.0	3.5	5.0
PSPMAA1040-680M-ANP	68.00	20%	175.0	200.0	3.0	4.0
PSPMAA1040-820M-ANP	82.00	20%	210.0	240.0	2.8	3.5
PSPMAA1040-101M-ANP	100.00	20%	249.0	270.0	2.5	3.0
PSPMAA1045H-220M-ANP	22.00	20%	60.0	72.0	4.0	6.0
PSPMAA1045H-470M-ANP	47.00	20%	136.0	164.0	3.5	4.5
PSPMAA1045H-680M-ANP	68.00	20%	155.0	230.0	2.5	4.5
PSPMAA1045H-101M-ANP	100.00	20%	250.0	300.0	2.0	4.0

