

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015445174](#)
Status: **Active**
Overview: C-Grid® Products
Description: 2.54mm Pitch C-Grid Receptacle, Through Hole, Dual Row, High Profile, Vertical, High-Temperature, 74 Circuits

Documents:

[3D Model](#) [Product Specification TS-70541-001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-70181-001 \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179


General

Product Family PCB Receptacles
 Series [71850](#)
 Application Board-to-Board, Signal
 Overview [C-Grid® Products](#)
 Product Name C-Grid
 UPC 822350924337

Physical

Circuits (Loaded) 74
 Circuits (maximum) 74
 Color - Resin Black
 Durability (mating cycles max) 50
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part No
 Material - Metal Phosphor Bronze
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 6.064/g
 Number of Rows 2
 Orientation Vertical
 PC Tail Length 3.05mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.57mm
 Packaging Type Tray
 Pitch - Mating Interface 2.54mm
 Pitch - Termination Interface 2.54mm
 Plating min - Mating 0.762µm
 Plating min - Termination 1.905µm
 Polarized to Mating Part No
 Polarized to PCB No
 Stackable No
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -40°C to +105°C
 Termination Interface: Style Through Hole

Electrical

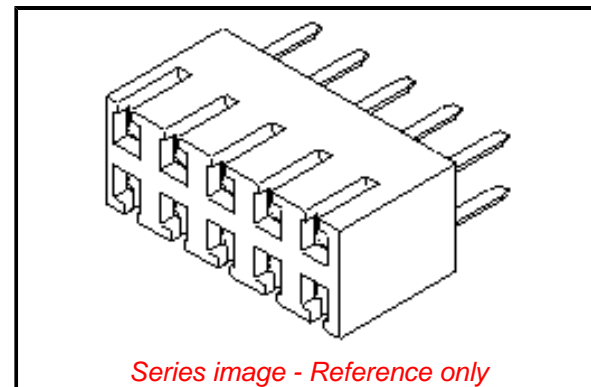

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/30/2017 (7 July
 2017)

Halogen-Free

Status

Low-Halogen

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any
 non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[71850](#) Series

Mates With

[8624](#) , [70203](#) , [70246](#) Straight Header,
[70247](#) Right Angle Header, [70287](#) , [70289](#)
 , [70227](#) , [70567](#) , [70280](#) , [70524](#) , [70260](#) ,
[8723](#) , [70568](#) , [8724](#) , [71764](#) , [70229](#) , [70](#)
[216](#) , [71308](#)

Current - Maximum per Contact	2.5A
Grounding to PCB	No
Voltage - Maximum	500V AC (RMS)

Solder Process Data

Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

Material Info

Engineering Number	71850-0228
--------------------	------------

Reference - Drawing Numbers

Product Specification	PS-70181-001, TS-70541-001-001
Sales Drawing	SDA-71850-0***

This document was generated on 10/17/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION