


NPN High-Voltage Transistors

BSR19,BSR19A

■ Features

- Low current (max. 300 mA)
- High voltage (max. 160 V).

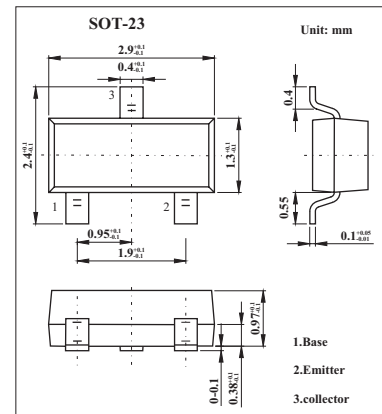

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage	BSR19	160	V
	BSR19A	180	V
Collector-emitter voltage	BSR19	140	V
	BSR19A	160	V
Emitter-base voltage	VEBO	6	V
Collector current	IC	300	mA
Peak collector current	ICM	600	mA
Base current	IB	100	mA
Peak base current	IBM	100	mA
Total power dissipation *	Ptot	250	mW
Storage temperature	Tstg	-65 to +150	°C
Junction temperature	Tj	150	°C
Operating ambient temperature	Ramb	-65 to +150	°C
Thermal resistance from junction to ambient *	Rth j-a	500	K/W

* Transistor mounted on an FR4 printed-circuit board.

BSR19,BSR19A

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit	
Collector cutoff current	BSR19	I _{CBO}	I _E = 0; V _{CB} = 100 V			100	nA
			I _E = 0; V _{CB} = 100 V; T _{amb} = 100 °C			100	μA
Collector cutoff current	BSR19A	I _{CBO}	I _E = 0; V _{CB} = 120 V			50	nA
			I _E = 0; V _{CB} = 120 V; T _{amb} = 100 °C			50	μA
Emitter cutoff current		I _{EBO}	I _C = 0; V _{EB} = 4 V			50	nA
DC current gain *	BSR19	h _{FE}	I _C = 10 mA; V _{CE} = 5 V	60		250	
	BSR19A			80		250	
DC current gain *	BSR19	h _{FE}	I _C = 50 mA; V _{CE} = 5 V	20			
	BSR19A			30			
collector-emitter saturation voltage		V _{CEsat}	I _C = 10 mA; I _B = 1 mA			150	mV
collector-emitter saturation voltage	BSR19	V _{CEsat}	I _C = 50 mA; I _B = 5 mA			250	mV
	BSR19A					200	mV
Collector capacitance		C _c	I _E = i _e = 0; V _{CB} = 10 V; f = 1 MHz			6	pF
Transition frequency		f _T	I _C = 10 mA; V _{CE} = 10 V; f = 100 MHz	100		300	MHz

■ hFE Classification

TYPE	BSR19	BSR19A
Marking	U35	U36