

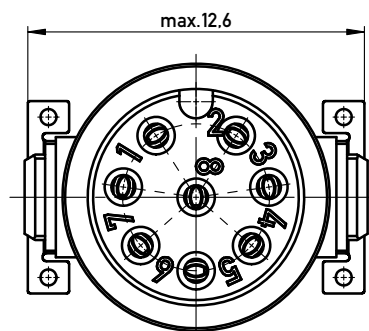
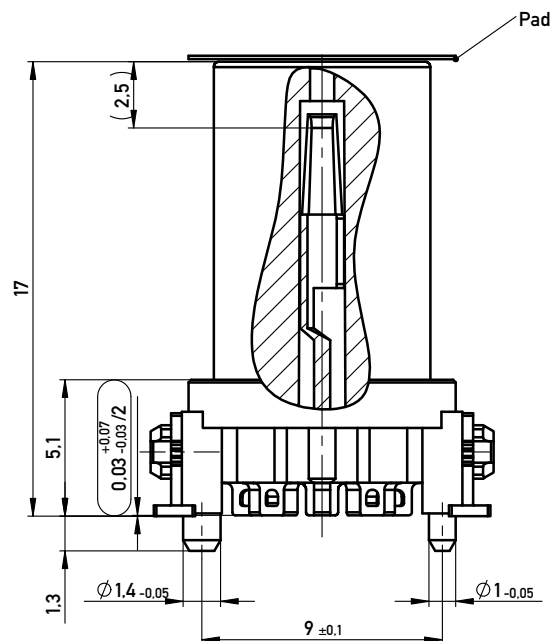
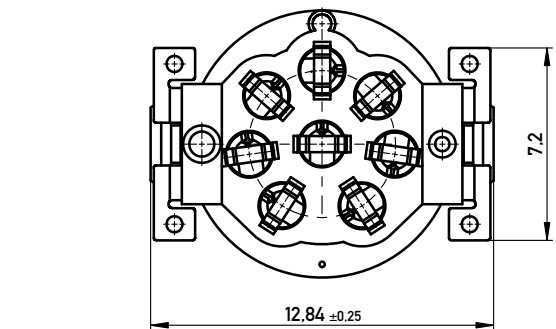
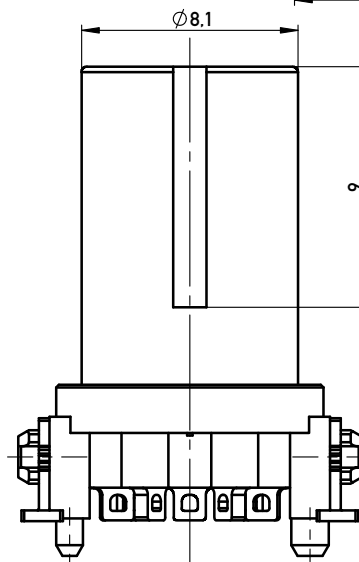





SPC-Maß: Prüfmaße der Kategorie /1
 /1 Für SPC-Maße muss eine x/s Regelkarte geführt werden mit Nachweis der Prozessfähigkeit in der Serie (Cpk) oder 100% - Prüfung

Prüfmaß: Prüfmaße der Kategorie /2 und /3
 /2 Für Prüfmaße muss eine x/s Regelkarte geführt werden


/3 Prüfmaße werden serienbegleitend attributiv (i.O. / n.i.O.) geprüft

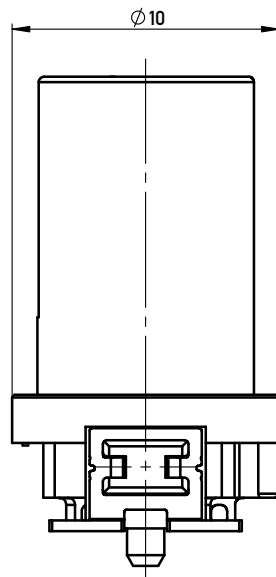


Verpackt in Gurtverpackung
 Tape on Reel Packaging
 Verpackungseinheit: 100 Stück
 Packaging unit: 100 pcs



Abspulrichtung - Reel off Direction

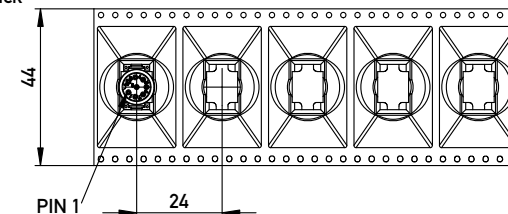

Layout - Vorschlag
 PCB - Layout proposal

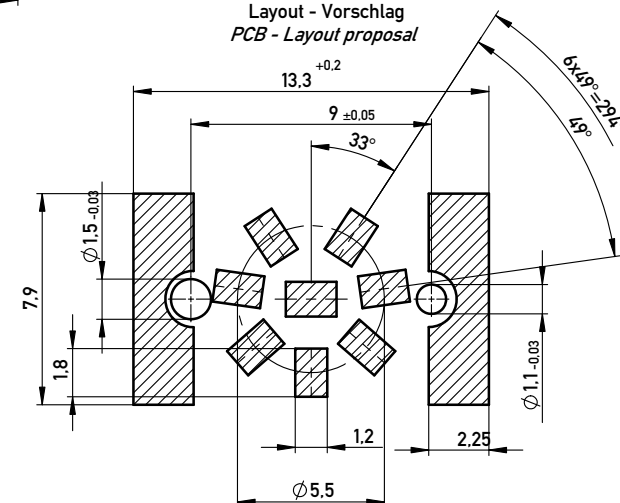

Koplanarität aller Kontakte und Clip ≤ 0.1mm
 Coplanarity of all contacts and clips ≤ 0.1mm

454952	8 Pol.	Gurtverpackung mit Pad / Tape on Reel Packaging with Pad
354131	8 Pol.	Gurtverpackung / Tape on Reel Packaging
254310	8 Pol.	Schüttgut 100 St. /bulk 100 pcs.
Ident-Nr.	Typ	Bemerkung

Information:		Tolerances	Scale 5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		 All Dimensions in mm	Designation	
Subject to modification without prior notice. Drawing will not be updated.		www.ERNI.com		Federleiste M12 A Cod. 8 polig 17 mm Type SMD 254309
g	10.07.2013	Class M12		I
Index	Date			A3