


PART NUMBER
SSB-LX2350IGW



REV.
B

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #10BRDR. & REDRAWN.	6.21.01
B	ECN-Lumex201600055	09.01.16

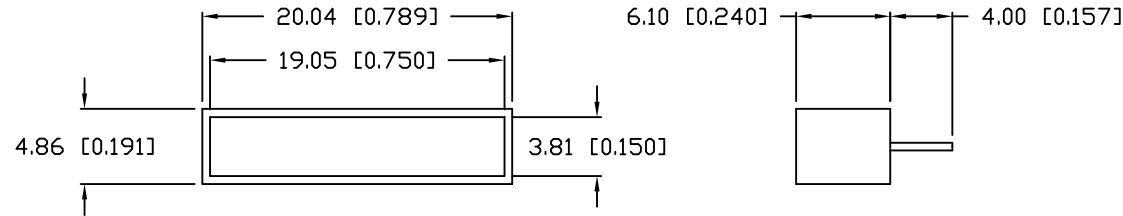

ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^\circ\text{C}$

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		627 (RED)		nm	
		565 (GREEN)		nm	
FORWARD VOLTAGE (R/G)		2.0/2.2	2.5	V_f	
REVERSE VOLTAGE			5.0	V_r	$I_r=100\mu\text{A}$
LUMINOUS INTENSITY (R/G)		50/60		mcd	$I_f=20\text{mA}$
EMITTED COLOR:		RED/GREEN			
EPOXY LENS FINISH:		MILKY WHITE DIFFUSED			

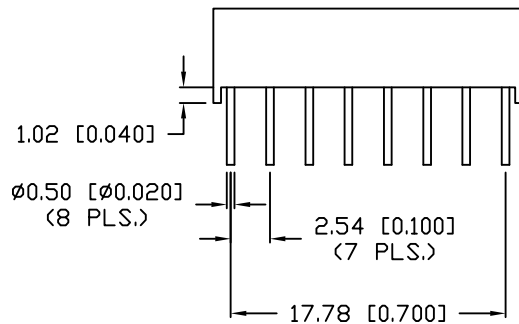


LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		140	mA
FORWARD CURRENT	(R/G)	30/25	mA
POWER DISSIPATION	(R/G)	75/65	mW
OPERATING, STORAGE TEMP.		-40 TO +85	°C
SOLDERING TEMP**		MAX. 3SEC.@260	°C

* $T < 10\mu\text{s}$

**2mm BELOW PACKAGE BASE

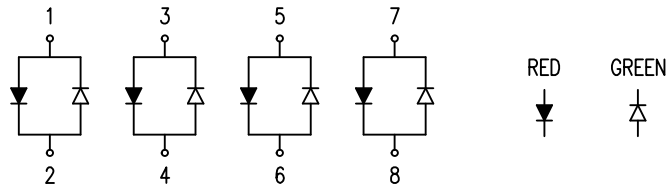

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00, MAX.= +0.00 -DECIMAL PRECISION

REV.	PART NUMBER
B	SSB-LX2350IGW

5mm x 20mm 4 CHIP LIGHT BAR,
RED/GREEN BICOLOR CHIPS, MILKY WHITE DIFFUSED EPOXY.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX 425 N. GARY AVE
CAROL STREAM, IL 60188
PHONE: 800-278-5666
FAX: 630-315-2152
WEB: WWW.LUMEX.COM

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE:
K.Y.	G.Y.	R.C.	09.01.16
			PAGE: 1 OF 1
			SCALE: N/A