

SBOS333B – JULY 2005 – REVISED OCTOBER 2005

Precision, Gain of 0.2 Level Translation DIFFERENCE AMPLIFIER

FEATURES

- **GAIN OF 0.2 TO INTERFACE ±10V SIGNALS TO SINGLE-SUPPLY ADCs**
- **GAIN ACCURACY: ±0.024% (max)**
- **WIDE BANDWIDTH: 1.5MHz**
- **HIGH SLEW RATE: 15V/μs**
- **LOW OFFSET VOLTAGE: ±100μV**
- **LOW OFFSET DRIFT: ±1.5μV/°C**
- **SINGLE-SUPPLY OPERATION DOWN TO 1.8V**

APPLICATIONS

- **INDUSTRIAL PROCESS CONTROLS**
- **INSTRUMENTATION**
- **DIFFERENTIAL TO SINGLE-ENDED CONVERSION**
- **AUDIO LINE RECEIVERS**

DESCRIPTION

The INA159 is a high slew rate, G = 1/5 difference amplifier consisting of a precision op amp with a precision resistor network. The gain of 1/5 makes the INA159 useful to couple ±10V signals to single-supply analog-to-digital converters (ADCs), particularly those operating on a single +5V supply. The on-chip resistors are laser-trimmed for accurate gain and high common-mode rejection. Excellent temperature coefficient of resistance (TCR) tracking of the resistors maintains gain accuracy and common-mode rejection over temperature. The input common-mode voltage range extends beyond the positive and negative supply rails. It operates on a total of +1.8V to +5.5V single or split supplies. The INA159 reference input uses two resistors for easy mid-supply or reference biasing.

The difference amplifier is the foundation of many commonly-used circuits. The INA159 provides this circuit function without using an expensive external precision resistor network. The INA159 is available in an MSOP-8 surface-mount package and is specified for operation over the extended industrial temperature range, –40°C to +125°C.

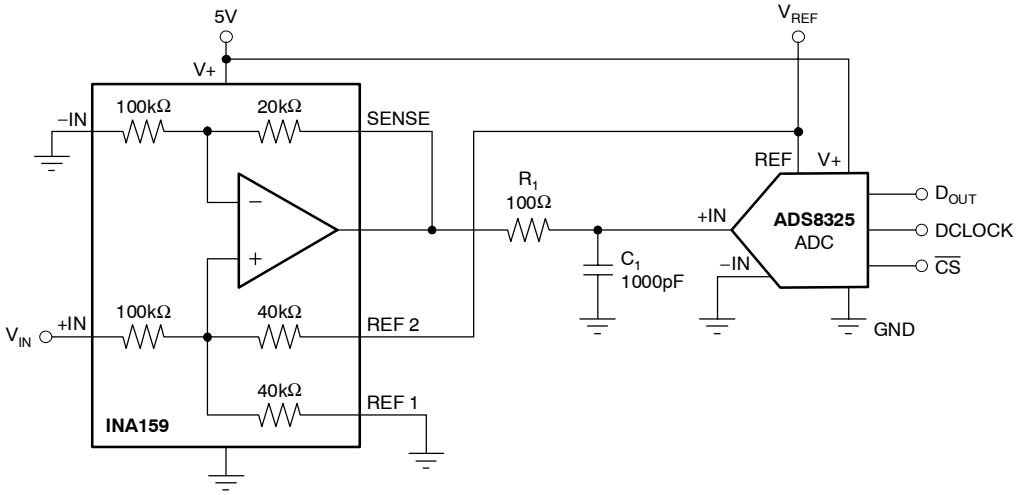


Figure 1. Typical Application

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2005, Texas Instruments Incorporated

ABSOLUTE MAXIMUM RATINGS(1)

Supply Voltage	+5.5V
Signal Input Terminals (–IN and +IN), Voltage	±30V
Reference (REF 1 and REF2) and Sense Pins	
Current	±10mA
Voltage	(V–) – 0.5V to (V+) + 0.5V
Output Short Circuit	Continuous
Operating Temperature	–40°C to +150°C
Storage Temperature	–65°C to +150°C
Junction Temperature	+150°C
ESD Rating	
Human Body Model	4000V
Charged Device Model	1000V

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not supported.

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ORDERING INFORMATION(1)


PRODUCT	PACKAGE-LEAD	PACKAGE DESIGNATOR	PACKAGE MARKING
INA159	MSOP-8	DGK	CJB

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

PIN CONFIGURATIONS

TOP VIEW **MSOP**

INA159

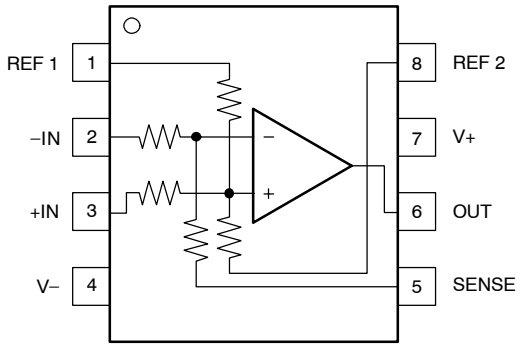

ELECTRICAL CHARACTERISTICS: V_S = +5V

Boldface limits apply over the specified temperature range, **T_A = –40°C to +125°C.**

At T_A = +25°C, R_L = 10kΩ connected to V_S/2, REF pin 1 connected to ground, and REF pin 2 connected to V_{REF} = 5V, unless otherwise noted.

PARAMETER		CONDITIONS	INA159 MIN	INA159 TYP	INA159 MAX	UNIT
OFFSET VOLTAGE(1)		RTO				
Initial (1)	V_{OS}	V_S = ±2.5V, Reference and Input Pins Grounded		±100	±500	µV
vs Temperature				**±1.5**		**µV/°C**
vs Power Supply	PSRR	V_S = ±0.9V to ±2.75V		±20	±100	µV/V
Reference Divider Accuracy(2)				±0.002	±0.024	%
over Temperature				**±0.002**		**%**
INPUT IMPEDANCE(3)						
Differential				240		kΩ
Common-Mode				60		kΩ
INPUT VOLTAGE RANGE		RTI				
Common-Mode Voltage Range	V_{CM}					
Positive				17.5		V
Negative				–12.5		V
Common-Mode Rejection Ratio	CMRR	V_{CM} = –10V to +10V, R_S = 0Ω	80	96		dB
over Temperature				**94**		**dB**
OUTPUT VOLTAGE NOISE(4)		RTO				
f = 0.1Hz to 10Hz				10		μV_{PP}
f = 10kHz				30		$nV/\sqrt{Hz}$
GAIN		V_{REF2} = 4.096V, R_L Connected to GND, $(V_{IN+}) - (V_{IN-})$ = –10V to +10V, V_{CM} = 0V				
Initial	G			0.2		V/V
Error				±0.005	±0.024	%
vs Temperature				**±1**		**ppm/°C**
Nonlinearity				±0.0002		% of FS
OUTPUT						
Voltage, Positive		V_{REF2} = 4.096V, R_L Connected to GND	(V+) – 0.1	(V+) – 0.02		V
Voltage, Negative		V_{REF2} = 4.096V, R_L Connected to GND	(V–) + 0.048	(V–) + 0.01		V
Current Limit, Continuous to Common				±60		mA
Capacitive Load				See Typical Characteristic		pF
Open-Loop Output Impedance	R_O	f = 1MHz, I_O = 0		110		Ω
FREQUENCY RESPONSE						
Small-Signal Bandwidth		–3dB		1.5		MHz
Slew Rate	SR			15		V/µs
Settling Time, 0.01%	t_S	4V Output Step, C_L = 100pF		1		µs
Overload Recovery Time		50% Overdrive		250		ns
POWER SUPPLY						
Specified Voltage Range	V_S			+5		V
Operating Voltage Range			+1.8		+5.5	V
Quiescent Current	I_Q	I_O = 0mA, V_S = ±2.5V, Reference and Input Pins Grounded		1.1	1.5	mA
TEMPERATURE RANGE						
Specified Range			–40		+125	°C
Operating Range			–40		+150	°C
Storage Range			–65		+150	°C
Thermal Resistance	θ_{JA}					
MSOP-8		Surface-Mount		150		°C/W

(1) Includes effects of amplifier input bias and offset currents.
(2) Reference divider accuracy specifies the match between the reference divider resistors using the configuration in Figure 2.
(3) Internal resistors are ratio matched but have ±20% absolute value.
(4) Includes effects of amplifier input current noise and thermal noise contribution of resistor network.


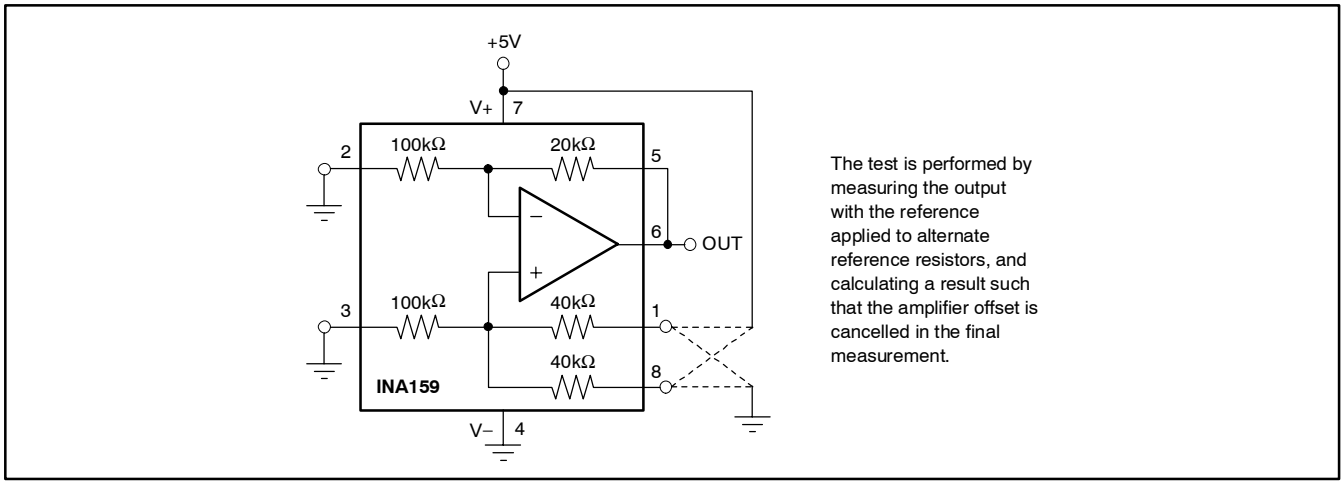


Figure 2. Test Circuit for Reference Divider Accuracy


TYPICAL CHARACTERISTICS

At T_A = +25°C, R_L = 10kΩ connected to V_S/2, REF pin 1 connected to ground, and REF pin 2 connected to V_{REF} = 5V, unless otherwise noted.


OFFSET VOLTAGE PRODUCTION DISTRIBUTION

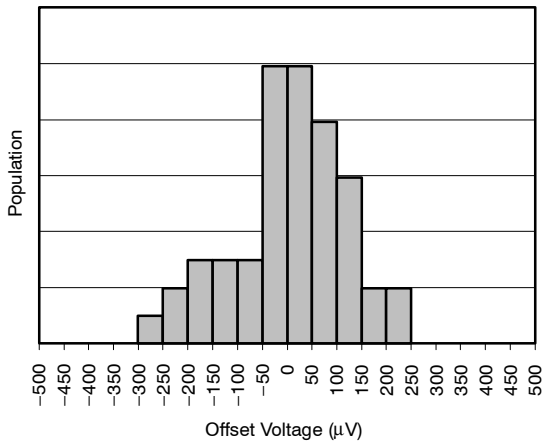


OFFSET VOLTAGE DRIFT PRODUCTION DISTRIBUTION

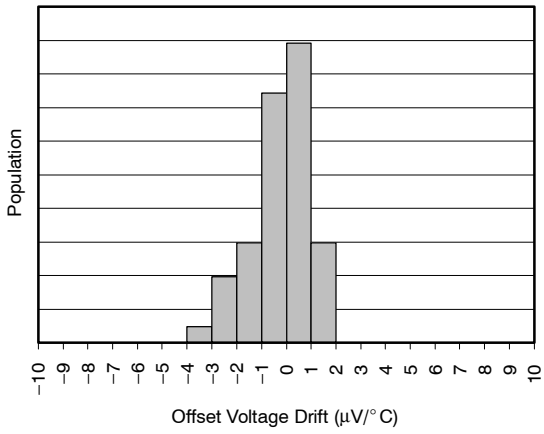

GAIN vs FREQUENCY

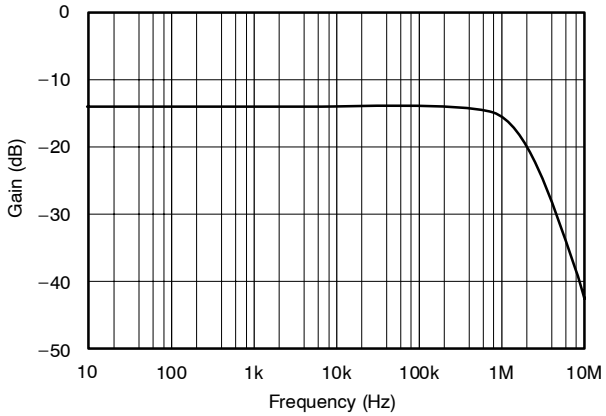


POWER−SUPPLY REJECTION RATIO vs FREQUENCY

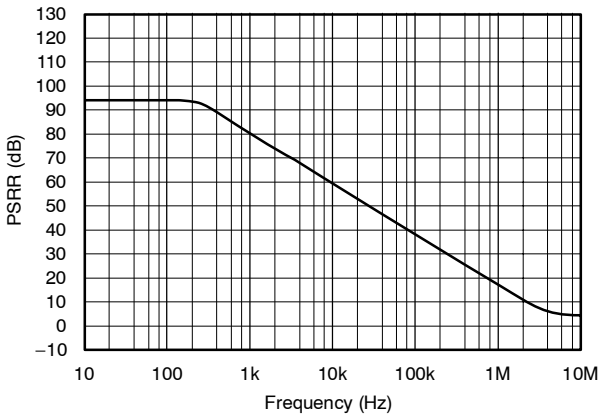


TYPICAL CHARACTERISTICS (continued)

At T_A = +25°C, R_L = 10kΩ connected to V_S/2, REF pin 1 connected to ground, and REF pin 2 connected to V_{REF} = 5V, unless otherwise noted.


COMMON–MODE REJECTION RATIO vs FREQUENCY

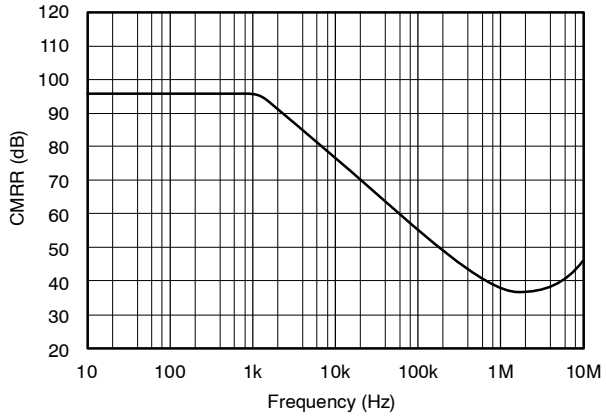


QUIESCENT CURRENT vs TEMPERATURE

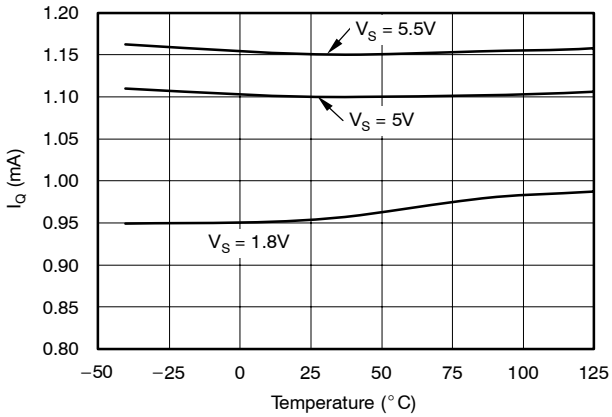


SHORT–CIRCUIT CURRENT vs TEMPERATURE

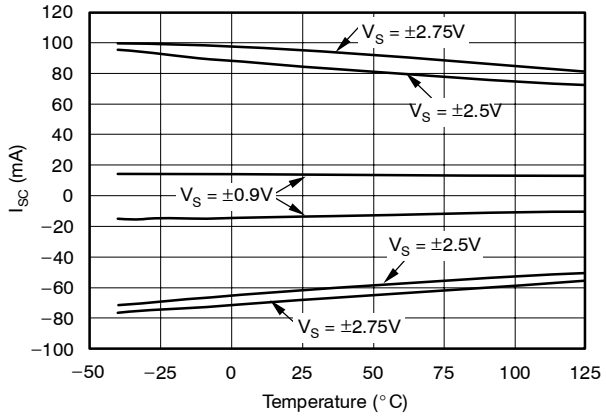


OUTPUT VOLTAGE SWING vs OUTPUT CURRENT

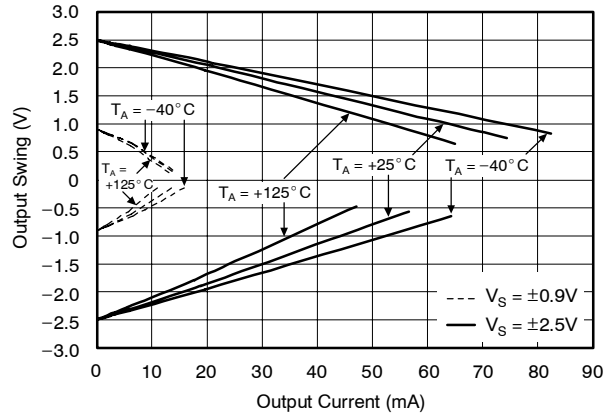

TOTAL HARMONIC DISTORTION + NOISE vs FREQUENCY

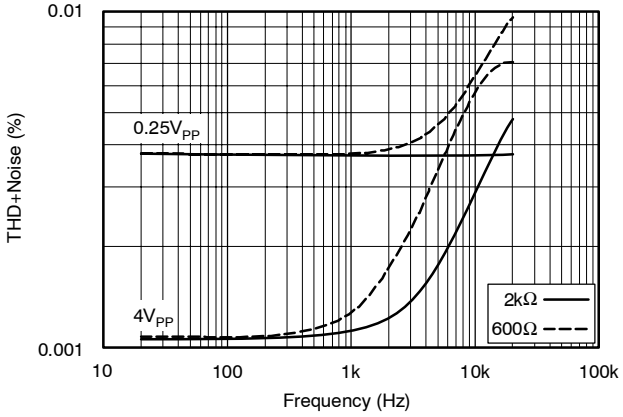


OUTPUT VOLTAGE NOISE SPECTRAL DENSITY vs FREQUENCY

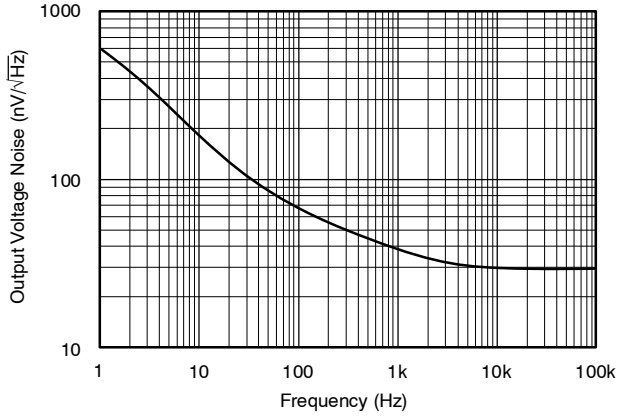


TYPICAL CHARACTERISTICS (continued)

At T_A = +25°C, R_L = 10kΩ connected to V_S/2, REF pin 1 connected to ground, and REF pin 2 connected to V_{REF} = 5V, unless otherwise noted.


0.1Hz TO 10Hz NOISE

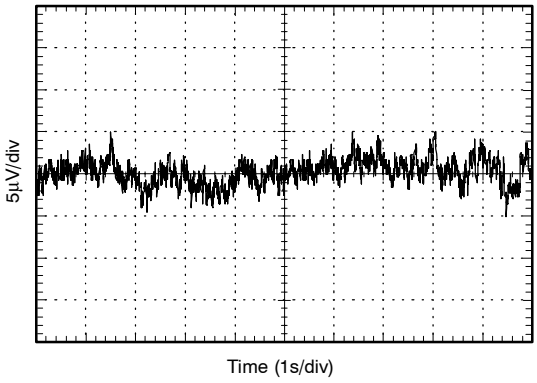


SMALL–SIGNAL OVERSHOOT vs LOAD CAPACITANCE

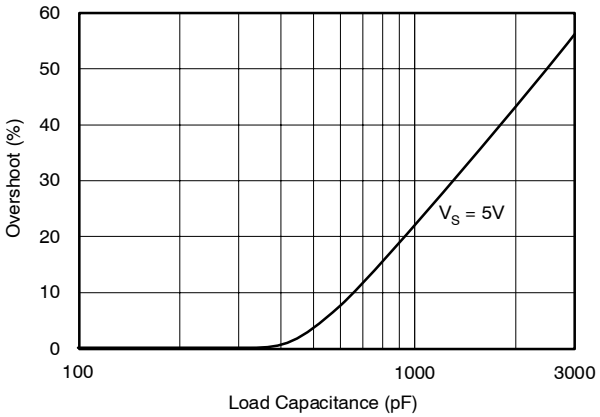


SMALL–SIGNAL STEP RESPONSE

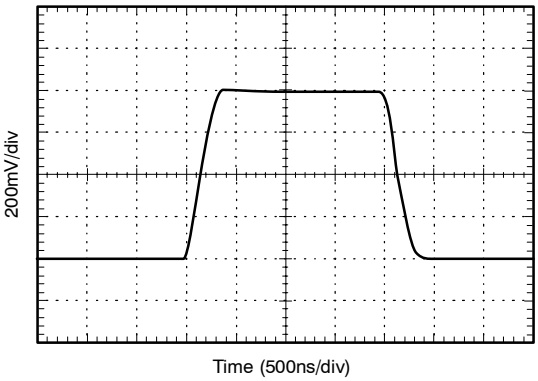

LARGE–SIGNAL STEP RESPONSE

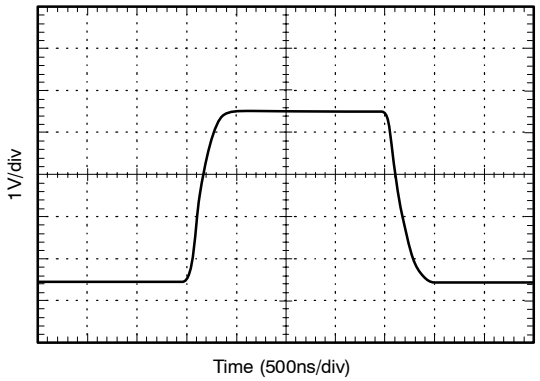

SETTLING TIME

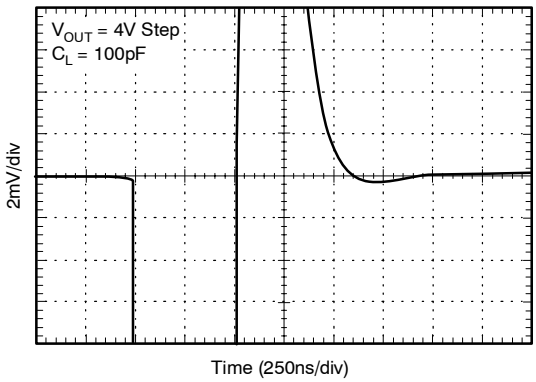

APPLICATION INFORMATION

The internal op amp of the INA159 has a rail-to-rail common-mode voltage capability at its inputs. A rail-to-rail op amp allows the use of ±10V inputs into a circuit biased to 1/2 of a 5V reference (2.5V quiescent output). The inputs to the op amp will swing from approximately 400mV to 3.75V in this application.

The unique input topology of the INA159 eliminates the input offset transition region typical of most rail-to-rail complementary stage operational amplifiers. This allows the INA159 to provide superior glitch- and transition-free performance over the entire common-mode range.

Good layout practice includes the use of a 0.1μF bypass capacitor placed closely across the supply pins.

COMMON-MODE RANGE

The common-mode range of the INA159 is a function of supply voltage and reference. Where both pins, REF1 and REF2, are connected together:

$$V_{CM+} = (V+) + 5[(V+) - V_{REF}] \quad (1)$$

$$V_{CM-} = (V-) - 5[V_{REF} - (V-)] \quad (2)$$

Where one REF pin is connected to the reference, and the other pin grounded (1/2 reference connection):

$$V_{CM+} = (V+) + 5[(V+) - (0.5V_{REF})] \quad (3)$$



$$V_{CM-} = (V-) - 5[(0.5V_{REF}) - (V-)] \quad (4)$$

Some typical values are shown in Table 1.

Table 1. Common-Mode Range For Various Supply and Reference Voltages

REF 1 and REF 2 Connected Together				
V+	**V–**	**V_{REF}**	**V_{CM+}**	**V_{CM-}**
5	0	3	15	–15
5	0	2.5	17.5	–12.5
5	0	1.25	23.75	–6.25
1/2 Reference Connection				
V+	**V–**	**V_{REF}**	**V_{CM+}**	**V_{CM-}**
5	0	5	17.5	–12.5
5	0	4.096	19.76	–10.24
5	0	2.5	23.75	–6.25
3.3	0	3.3	11.55	–8.25
3.3	0	2.5	13.55	–6.25
3.3	0	1.25	16.675	–3.125

Table 2. Input and Output Relationships for Various Reference and Connection Combinations

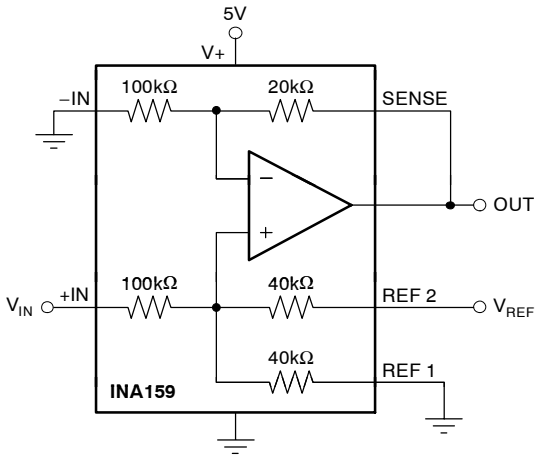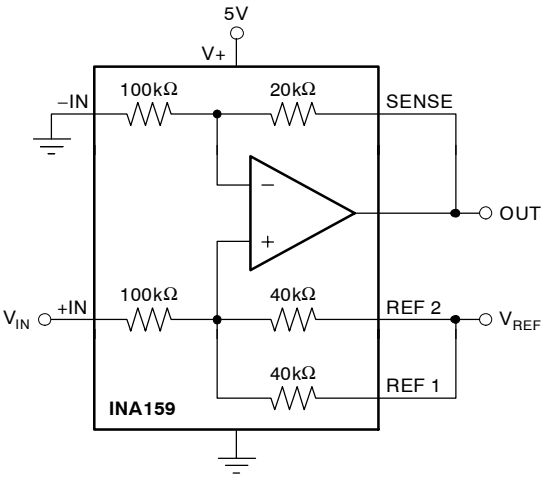V_{REF} (V)	REF CONNECTION	V_{OUT} for V_{IN} = 0 (V)	LINEAR V_{IN} RANGE (V)	USEFUL V_{OUT} SWING (V)
5		2.5	+10 0 –10	4.5 (±2V swing) 0.5
4.096		2.048	+10 0 –10	4.048 (±2V swing) 0.048
3.3		1.65	+10 0 –7.885	3.65 (–1.577V, +2V swing) 0.048
2.5		1.25	+10 (also +5) 0 –6 (also –5)	3.25 (–1.2V, +2V swing) 0.048
1.8		0.9	+10 0 –4.26	2.9 (–0.852V, +2V swing) 0.048
2.5		2.5	+10 0 –10	4.5 (±2V swing) 0.5
1.8		1.8	+10 0 –8.76	3.8 (–1.752V, +2V swing) 0.048
1.2		1.2	+10 0 –5.76	3.2 (–1.15V, +2V swing) 0.048

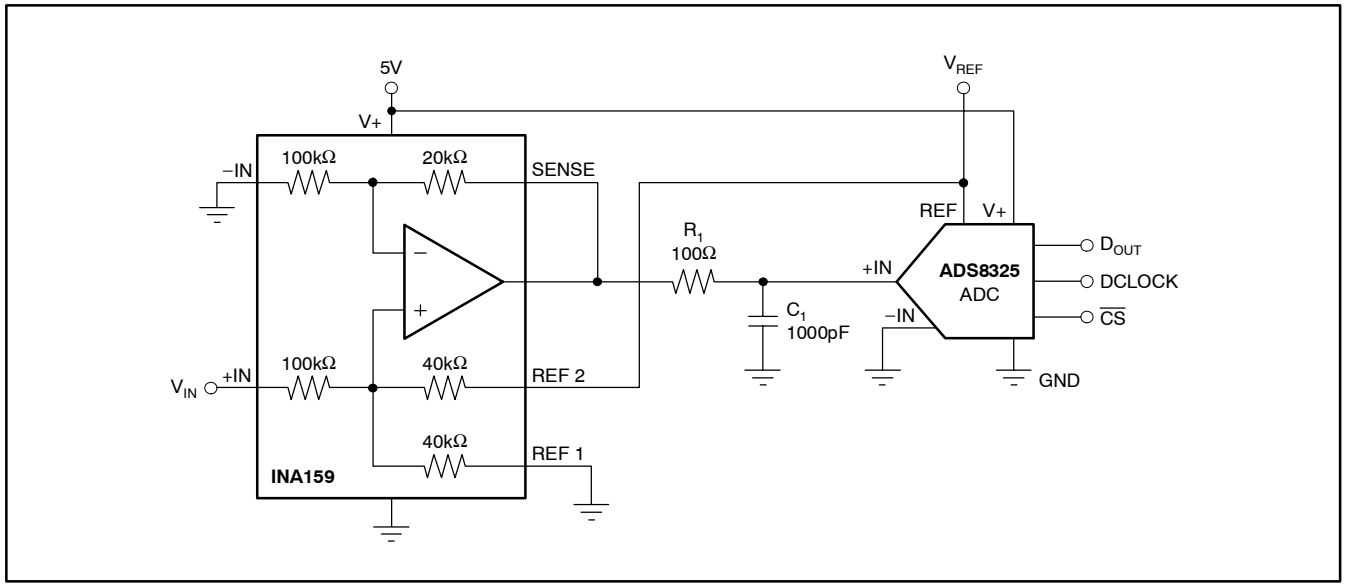


Figure 3. Typical Application Circuit Interfacing to Medium-Speed, Single-Supply ADCs



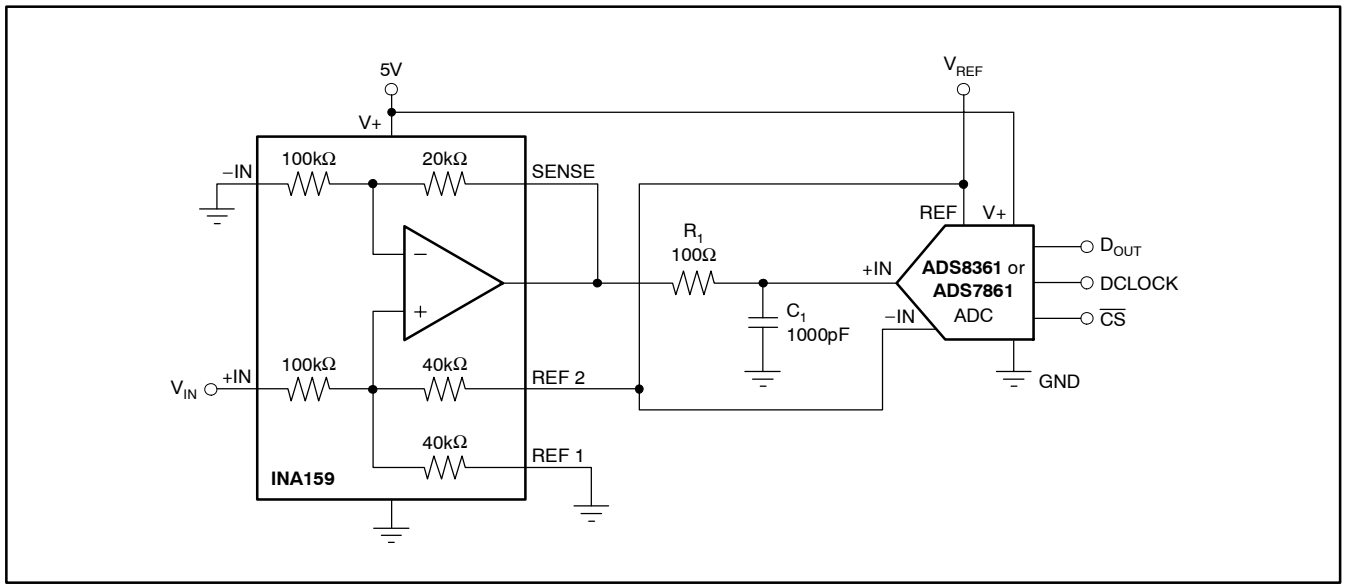



Figure 4. Typical Application Circuit Interfacing to Medium-Speed, Single-Supply ADCs with Pseudo-Differential Inputs (such as the ADS7861 and ADS8361)

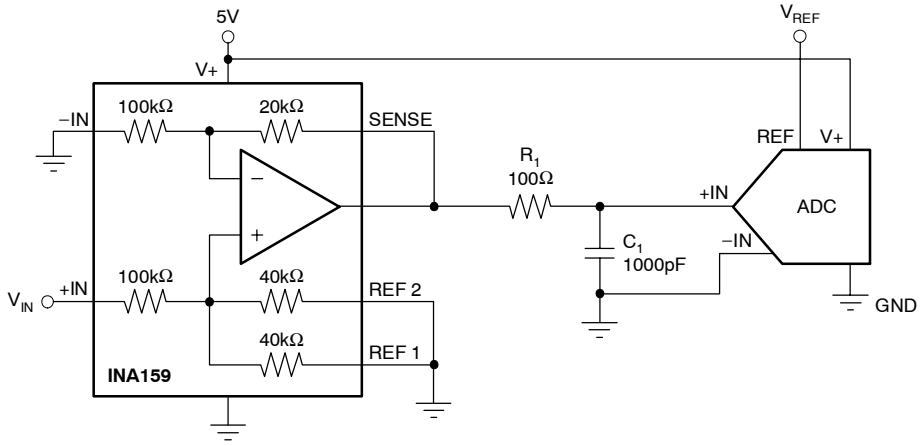

a) Unipolar, Noninverting, G = 0.2

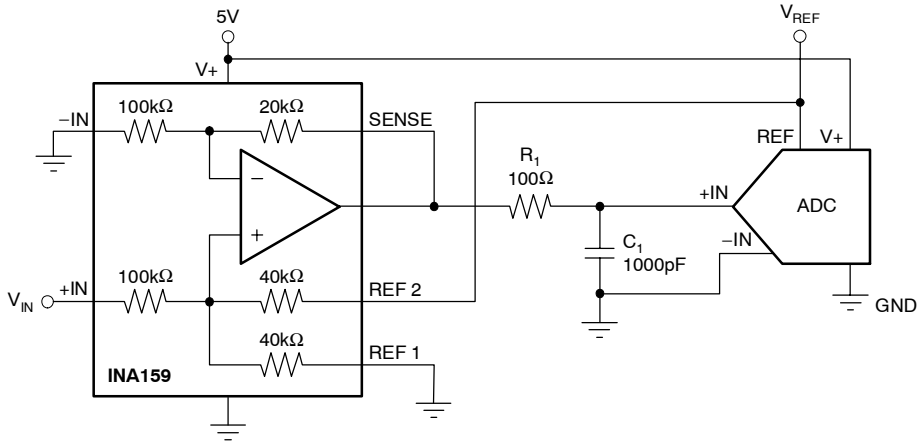

b) Bipolar, Noninverting, G = 0.2

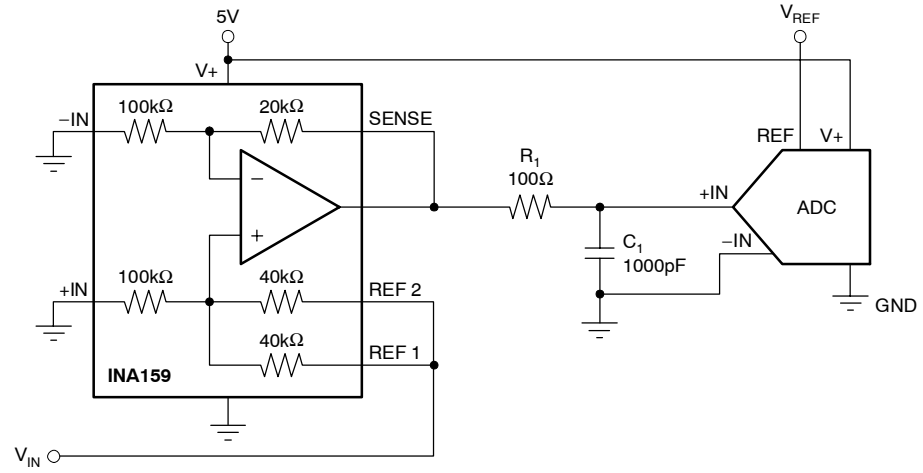

c) Unipolar, Unity Gain

Figure 5. Basic INA159 Configurations

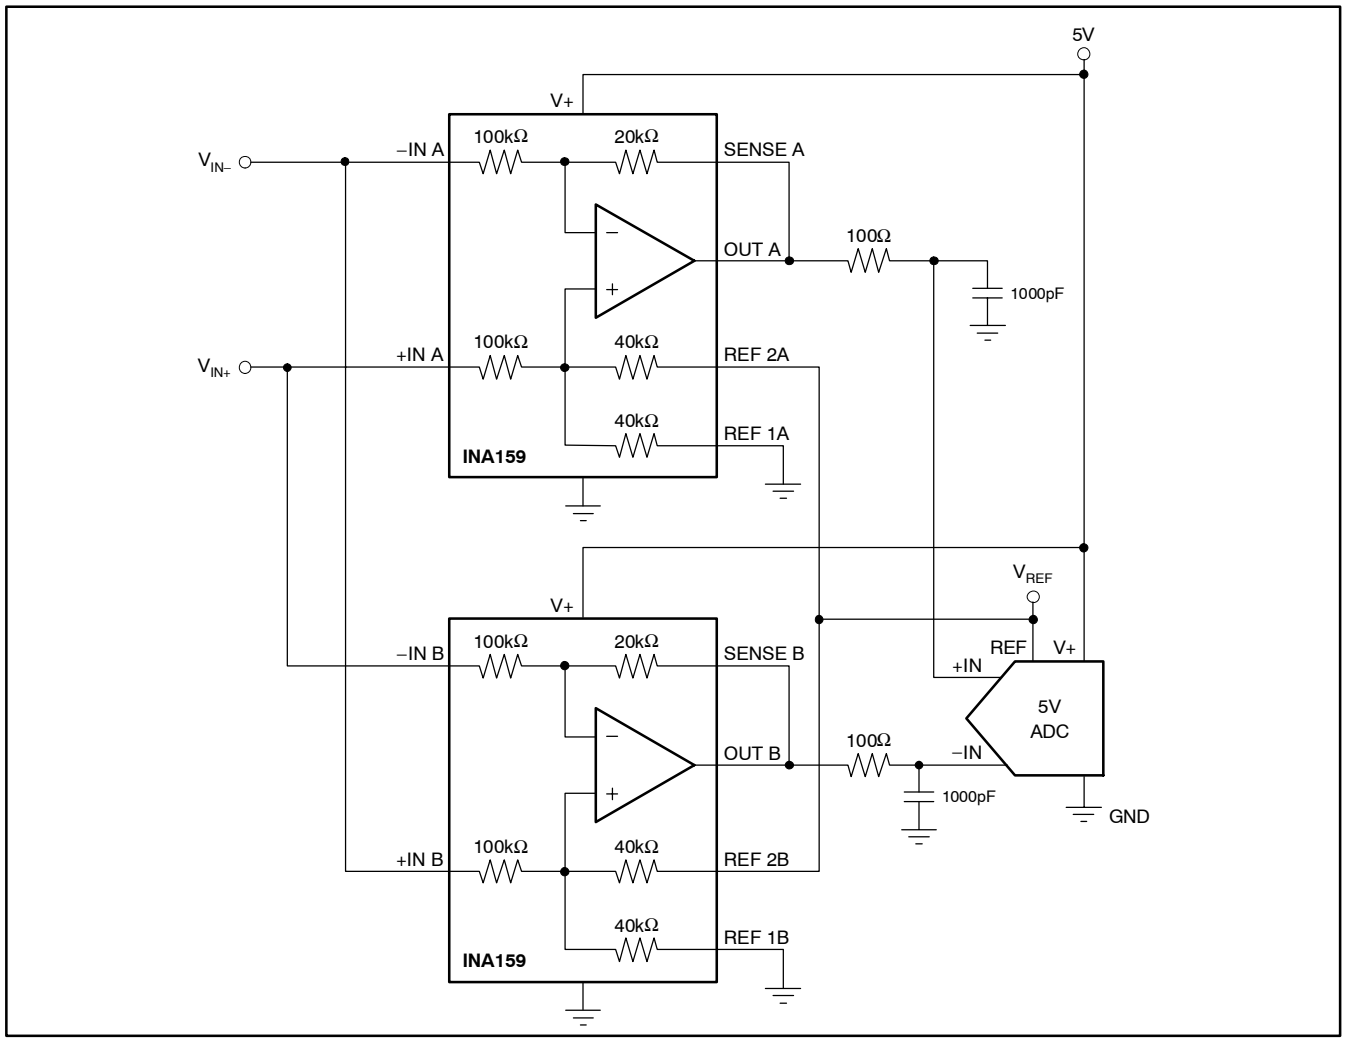


Figure 6. Differential ADC Drive

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
INA159AIDGKR	ACTIVE	VSSOP	DGK	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU | CU NIPDAUAG	Level-1-260C-UNLIM	-40 to 125	CJB	Samples
INA159AIDGKRG4	ACTIVE	VSSOP	DGK	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	CJB	Samples
INA159AIDGKT	ACTIVE	VSSOP	DGK	8	250	Green (RoHS & no Sb/Br)	CU NIPDAU | CU NIPDAUAG	Level-1-260C-UNLIM	-40 to 125	CJB	Samples
INA159AIDGKTG4	ACTIVE	VSSOP	DGK	8	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	CJB	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF INA159 :


- Enhanced Product: INA159-EP

NOTE: Qualified Version Definitions:


- Enhanced Product - Supports Defense, Aerospace and Medical Applications

TAPE AND REEL INFORMATION

REEL DIMENSIONS

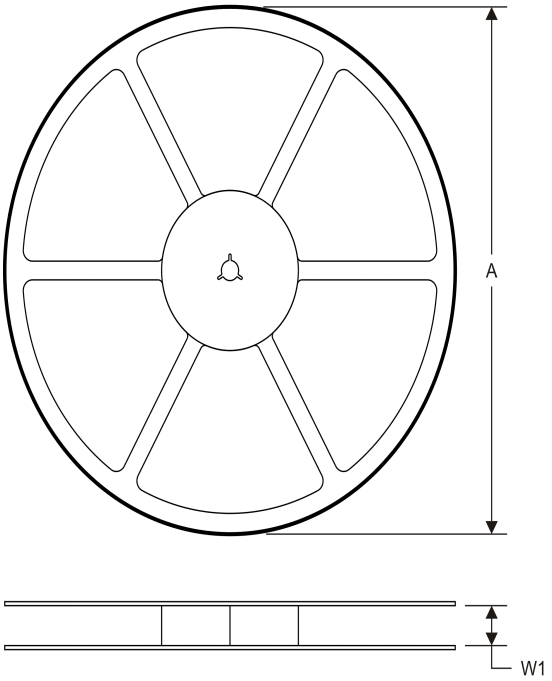

TAPE DIMENSIONS

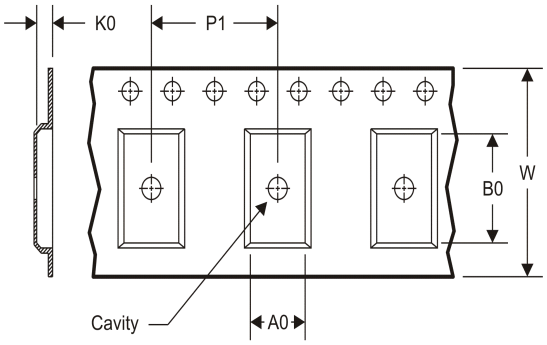


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

TAPE AND REEL INFORMATION

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
INA159AIDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
INA159AIDGKT	VSSOP	DGK	8	250	180.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1


TAPE AND REEL BOX DIMENSIONS

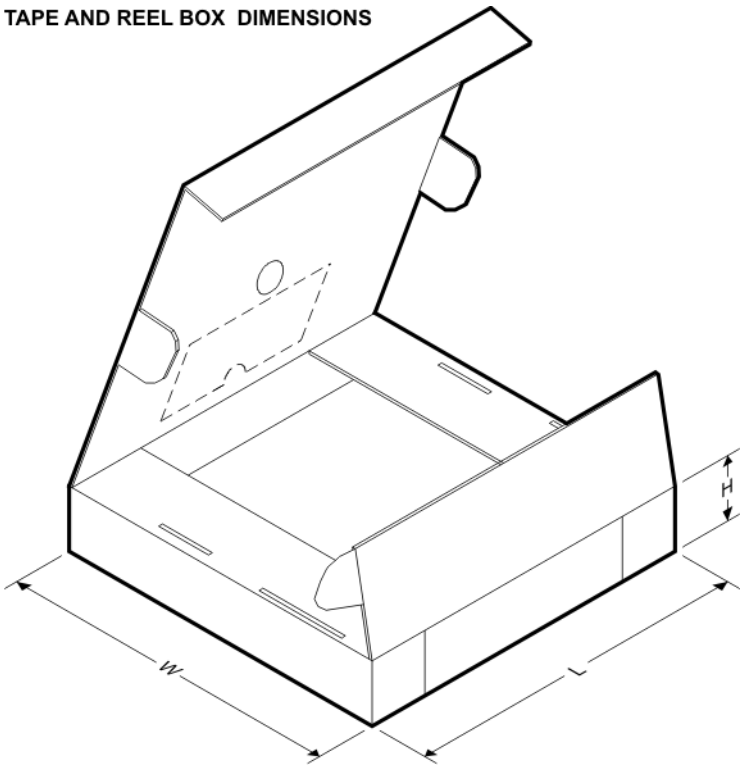

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
INA159AIDGKR	VSSOP	DGK	8	2500	367.0	367.0	35.0
INA159AIDGKT	VSSOP	DGK	8	250	210.0	185.0	35.0


DGK (S–PDSO–G8) PLASTIC SMALL–OUTLINE PACKAGE

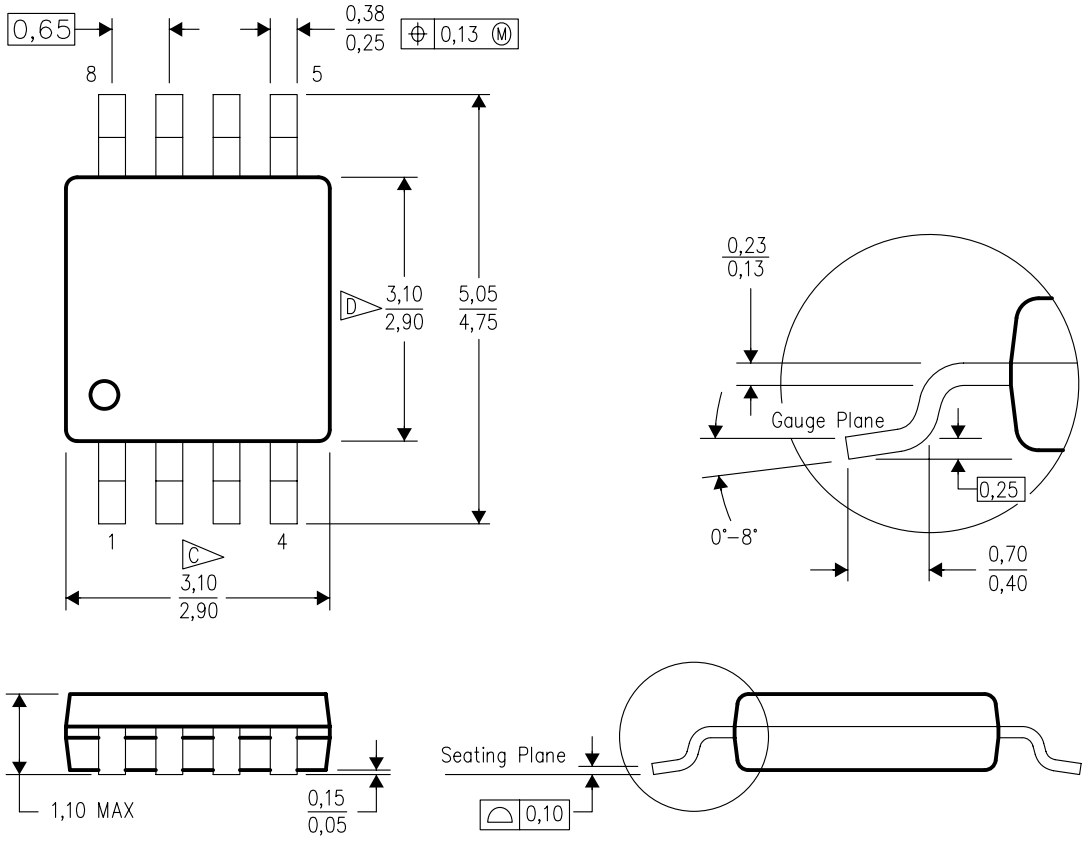

4073329/E 05/06

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
E. Falls within JEDEC MO–187 variation AA, except interlead flash.

DGK (S–PDSO–G8) PLASTIC SMALL OUTLINE PACKAGE

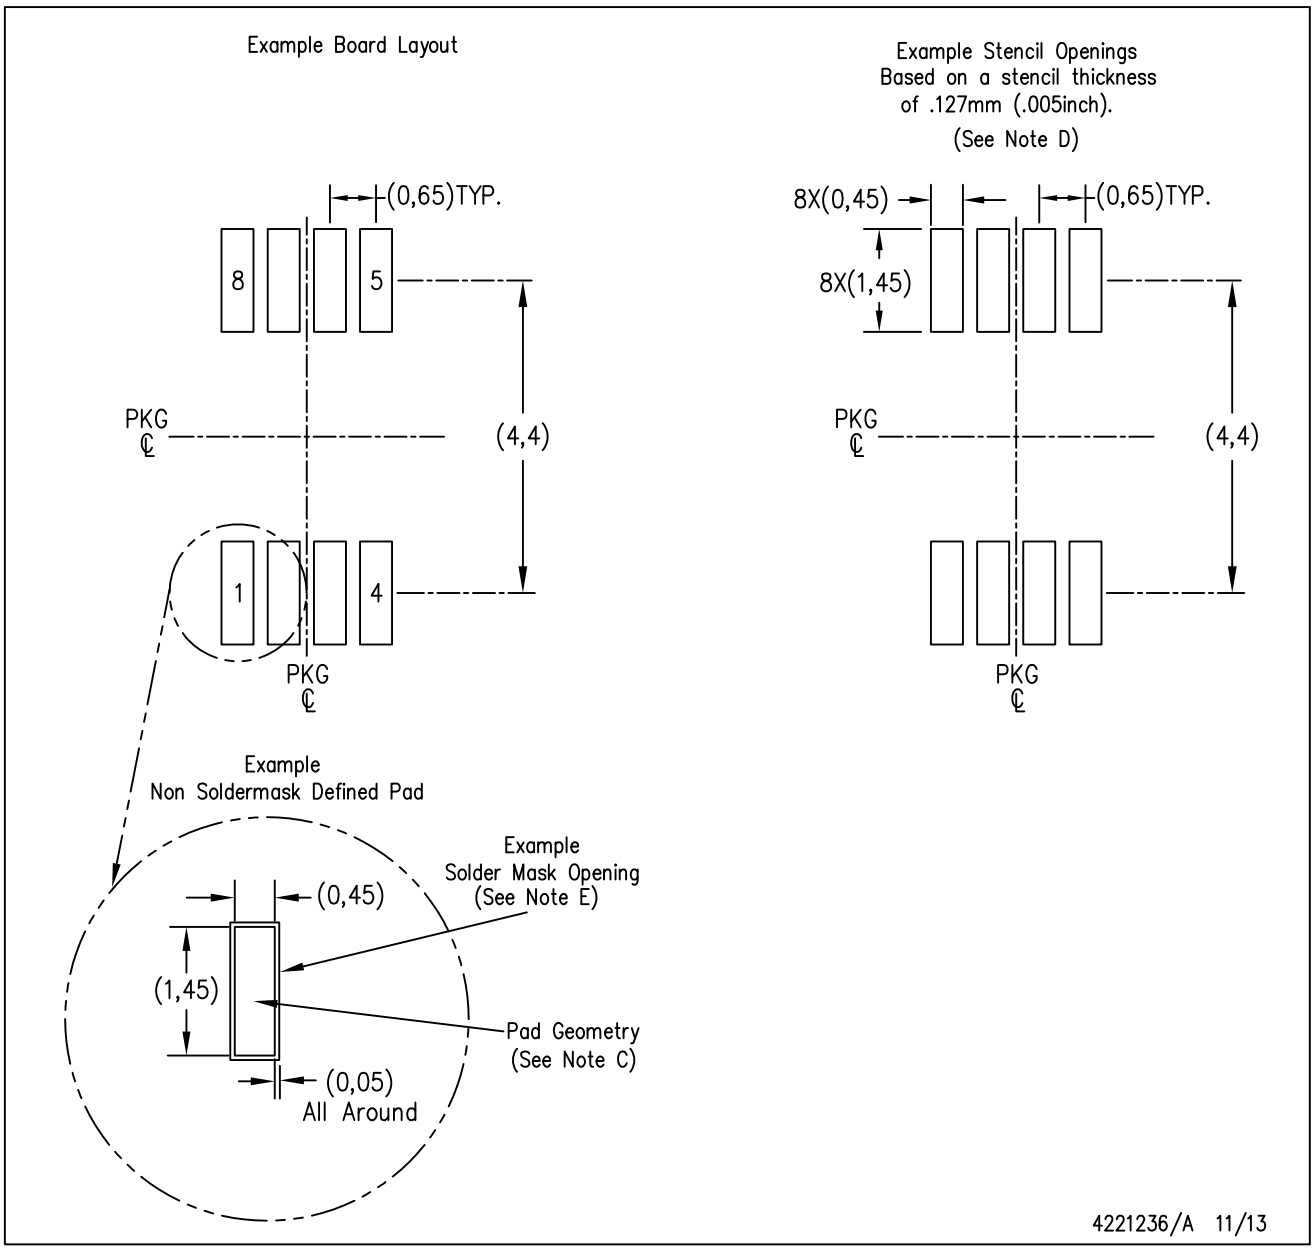

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2013, Texas Instruments Incorporated