




# External Drive Piezo Transducer (AC)



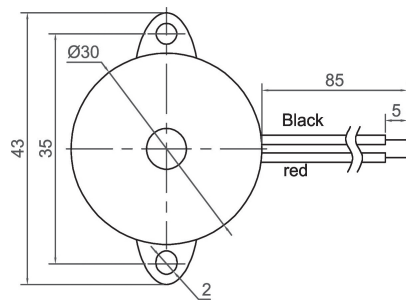


**CPT3005**



| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF)      | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|------------------------|-------------------|-----------------------|-------------------------|-----------------------|----------------------------|---------|------------|
| CPT3005C25BW     | 80 AT 10cm             | 3 Vrms            | 30 Vp-p               | 2500                    | 55000 ± 30% at 1000Hz | -20 ~ +70                  | ABS     | 5          |
| CPT3005C35BW     | 75 AT 10cm             | 3 Vp-p            | 30 Vp-p               | 3500                    | 25000 ± 30% at 1000Hz | -20 ~ +60                  | ABS     | 3.5        |
| CPT3005C40BW     | 85 AT 10cm             | 3 Vrms            | 30 Vp-p               | 4000                    | 25000 ± 30% at 1000Hz | -20 ~ +70                  | ABS     | 5          |
| CPT3005I13BW     | 75 AT 10cm             | 12 Vp-p           | 40 Vp-p               | 1300                    | 45000 ± 30% at 1000Hz | -20 ~ +60                  | ABS     | 3.5        |



**CPT3008**




| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF)      | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|------------------------|-------------------|-----------------------|-------------------------|-----------------------|----------------------------|---------|------------|
| CPT3008G30TP     | 80 AT 10cm             | 9 Vp-p            | 30 Vp-p               | 3000                    | 35000 ± 30% at 1000Hz | -30 ~ +70                  | PBT     | 5          |
| CPT3008G40TP     | 80 AT 10cm             | 9 Vp-p            | 30 Vp-p               | 4000                    | 25000 ± 30% at 1000Hz | -30 ~ +70                  | PBT     | 5.5        |



**CPT3010**

| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF)      | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|------------------------|-------------------|-----------------------|-------------------------|-----------------------|----------------------------|---------|------------|
| CPT3010C18BP     | 80 AT 10cm             | 3 Vrms            | 30 Vp-p               | 1800                    | 50000 ± 30% at 1000Hz | -20 ~ +70                  | ABS     | 6          |
| CPT3010C25TP     | 90 AT 10cm             | 3 Vrms            | 30 Vp-p               | 2500                    | 25000 ± 30% at 1000Hz | -20 ~ +70                  | PBT     | 6          |



**Your Efficient Supplier**  
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216