




MICROCIRCUIT INTERFACE TRANSCEIVER OF THE SERIAL DATA OF THE STANDARD RS -232

Microcircuits HT3232 is interface transceiver of serial data under RS - 232 standard with single power supply source & bipolar output voltage of transmitter, forming by build-in voltage multiplier on 4 external capacities, 0.1 μ F. HT3232 correspond to EIA/TIA-232E, V.28 standard and is purposed for application in modern high efficient calculating systems with the wide range of supply voltage, fast-operating electronic devices with high level of fidelity of information exchange among distant devices.

Functions and structure:

- Microcircuit contains 2 transmitters and 2 receivers of the serial data of the standard RS-232.
- The microcircuit supply voltage range is from 3.0 to 5.5 V.
- Enhanced ESD Specifications:
 - 15kV IEC61000-4-2 Air Discharge
 - 8kV IEC61000-4-2 Contact Discharge

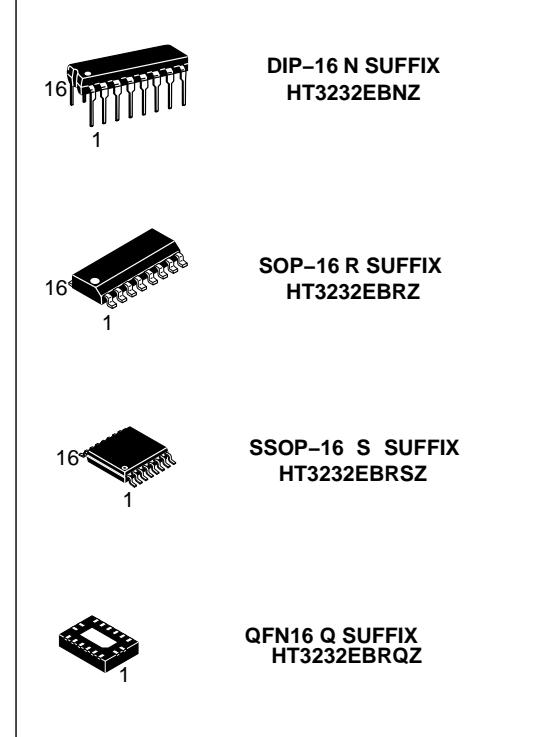


Truth Table

Input	Output
RXIN, TXIN	$\overline{\text{RXOUT}}, \text{TXOUT}$
H	L
L	H


Note –
L – low voltage level;
H – high voltage level

Pinning

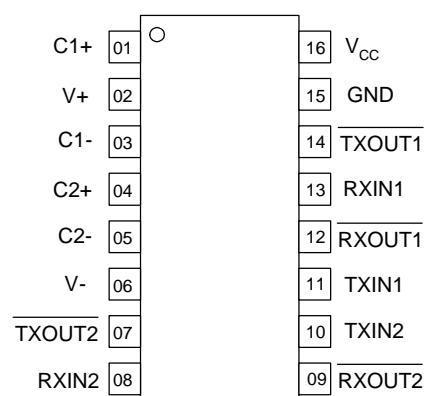



Functional diagram

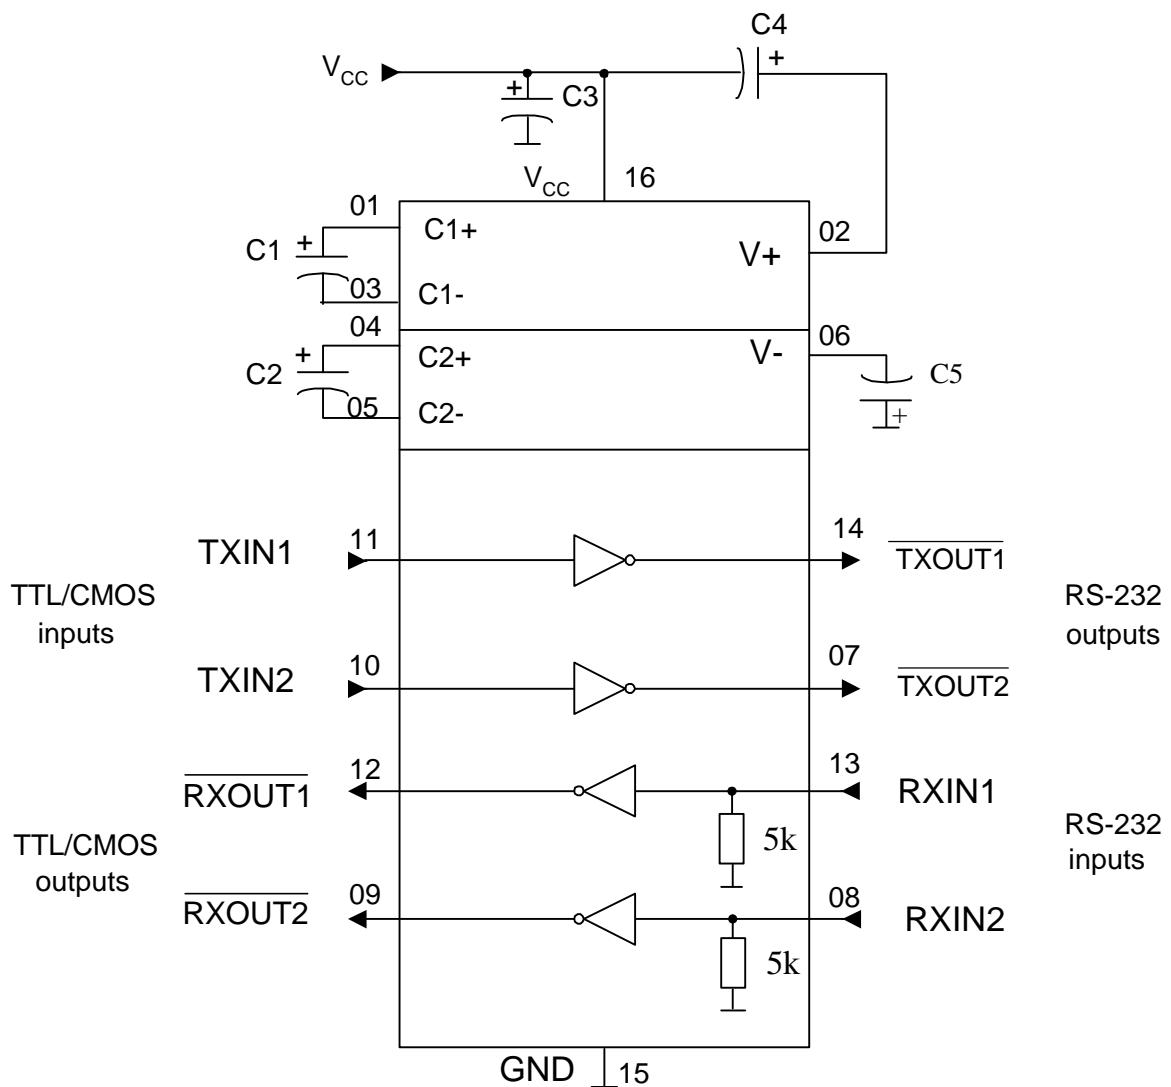

C1 – capacitor $0.1 \mu\text{F} \pm 10\%$ for $U_{CC} = 3.3 \text{ V} \pm 10\%$ ($0.047 \mu\text{F} \pm 10\%$ for $U_{CC} = 5.0 \text{ V} \pm 10\%$)

C2, C4, C5 – capacitors $0.1 \mu\text{F} \pm 10\%$ for $U_{CC} = 3.3 \text{ V} \pm 10\%$ ($0.33 \mu\text{F} \pm 10\%$ for $U_{CC} = 5.0 \text{ V} \pm 10\%$)

C3 – capacitor $0.1 \mu\text{F} \pm 10\%$

**Pin description table**

Pin number	Pin description	Symbol
01	Positive terminal of the voltage multiplier charge-pump capacitor	C1+
02	Positive voltage multiplier output	V+
03	Negative terminal of the voltage multiplier charge-pump capacitor	C1-
04	Positive terminal of the voltage multiplier charge-pump capacitor	C2+
05	Negative terminal of the voltage multiplier charge-pump capacitor	C2-
06	Negative voltage multiplier output	V-
07	Transmitter output (RS-232 levels)	<u>TXOUT2</u>
08	Receiver input (RS-232 levels)	<u>RXIN2</u>
09	Receiver output (TTL/CMOS levels)	<u>RXOUT2</u>
10	Transmitter input (TTL/CMOS levels)	<u>TXIN2</u>
11	Transmitter input (TTL/CMOS levels)	<u>TXIN1</u>
12	Receiver output (TTL/CMOS levels)	<u>RXOUT1</u>
13	Receiver input (RS-232 levels)	<u>RXIN1</u>
14	Transmitter output (RS-232 levels)	<u>TXOUT1</u>
15	Common pin	GND
16	Supply voltage	V

Maximum Ratings & Recommended Operating Conditions

Parameter, unit	Symbol	Recommended operating conditions		Maximum rate	
		min	max	min	max
Supply voltage, V	U_{CC}	3.0	5.5	-0.3	6.0
Voltage applied to transmitter output, V	U	—	—	-13.2	13.2
Multiplier positive output voltage, V	U_+	5.0	—	-0.3	7.0
Multiplier negative output voltage, V	U_-	-5.0	—	-7.0	0.3
Receiver input voltage, V	U	-25	25	-25	25
Receiver output voltage, V	U	—	—	-0.3	$U_{CC}+0.3$
Transmitter low level input voltage, V	U	0	0.8	-0.3	—
Transmitter high level input voltage, V	U_{IH}	2.0 ($U_{CC}=3.3$ V)	U_{CC}	—	6
		2.4 ($U_{CC}=5.0$ V)			
Multiplier outputs voltages difference, V	$U_+ + U_-$	—	—	—	13
Receiver low level threshold input voltage, V	U_{ITL}	0.6 ($U_{CC}=3.3$ V)	—	—	—
		0.8 ($U_{CC}=5.0$ V)			
Receiver high level threshold input voltage, V	U_{ITH}	—	2.4	—	—



Electric parameters

Parameter, unit	Symbol	Norm		Mode	$T_A, ^\circ C$
		Min	Max		
Supply current, μA	I_{CC1}	-	1.0	$U_{CC} = 3.3 V; 5.0 V;$ $U_{IL} = 0 V$	25 ± 10
			1.4		$-40; 85$
Receiver					
Low level output voltage, V	U_{OLR}	-	0.3	$U_{CC} = 3.3V \pm 10\%; U_{ITH} = 2.4V;$ $I = 1.6 mA$	25 ± 10
			0.4		$-40; 85$
			0.3	$U_{CC} = 5.0V \pm 10\%; U_{ITH} = 2.4V;$ $I = 1.6 mA$	25 ± 10
			0.4		$-40; 85$
High level output voltage, V	U_{OHR1}	2.5	-	$U_{CC} = 3.3V \pm 10\%; U_{ITL} = 0.6 V;$ $I = -1.0 mA$	25 ± 10
		2.4			$-40; 85$
	U_{OHR2}	4.0		$U_{CC} = 5.0V \pm 10\%; U_{ITL} = 0.8 V;$ $I = -1.0 mA$	25 ± 10
		3.9			$-40; 85$
Receiver hysteresis, V	U_h	0.2	1.0	$U = 3.3 V \pm 10\%; 5.0 V \pm 10\%$	25 ± 10
Input resistance, kOhm	R	3	7	-	25 ± 10
OFF-ON switching propagation delay, ns	t_{PHLR}, t	-	1500	$U_{CC} = 5.0V \pm 10\%;$ $C_L = 150 pF;$	
Propagation delays difference, ns	t_{SKD}	-	600	$U_{IL} = 0 V;$ $U_{IH} = 3.0 V;$ $t = t \leq 10 ns$	
Transmitter					
Low level output voltage, V	U_{OLT1}	-	-5.07	$U_{CC}=3.3V \pm 10\%; U_{IH} = 2.0V;$ $R = 3 kOhm$	25 ± 10
		-	-5.0		$-40; 85$
	U_{OLT2}	-	-5.07	$U_{CC}=5.0V \pm 10\%; U_{IH} = 2.4V;$ $R = 3 kOhm$	25 ± 10
		-	-5.0		$-40; 85$
High level output voltage, V	U_{OHT}	5.07	-	$U_{CC}=3.3V \pm 10\%; U_{IL} = 0.8V;$ $R = kOhm$	25 ± 10
		5.0			$-40; 85$
		5.07	-	$U_{CC}=5.0V \pm 10\%; U_{IL} = 0.8V;$ $R = kOhm$	25 ± 10
		5.0			$-40; 85$
Transmitter hysteresis, V	U_h	0.1	1.0	$U = 3.3 V \pm 10\%; 5.0 V \pm 10\%$	25 ± 10
Low level input leakage current, μA	I_{ILL}	-	-0.5	$U_{CC} = 5.5 V; U_{IL} = 0V$	25 ± 10
			-1.0		$-40; 85$
High level input leakage current, μA	I_{ILH}	-	0.5	$U_{CC} = 5.5 V; U_{IH} = 5.5V$	25 ± 10
			1.0		$-40; 85$
Output resistance , Ohm	R_o	350	-	$U_{CC} = U_{V+}* = U_{V-}* = 0 V;$ $U = \pm 2 V$	25 ± 10
		300			$-40; 85$




Electric parameters


Parameter, unit	Symbol	Norm		Mode	$T_A, ^\circ C$
		Min	Max		
Transmitter					
Short circuit current, mA	I_{OS}	-	53	$U_{CC} = 3.6 V$	25 ± 10
			60		-40; 85
			-53	$U_{CC} = 3.6 V$	25 ± 10
			-60		-40; 85
		-	53	$U_{CC} = 5.5 V$	25 ± 10
			60		-40; 85
			-53	$U_{CC} = 5.5 V$	25 ± 10
			-60		-40; 85
Low level output current for OFF-state, μA	I_{OZLT}	-	-10	$U_{CC} = 0V;$ $U_O = -12 V;$ transmitter output is disabled	25 ± 10
			-25		-40; 85
High level output current for OFF-state, μA	I_{OZHT}	-	10	$U_{CC} = 0V;$ $U_O = 12 V;$ transmitter output is disabled	25 ± 10
			25		-40; 85
Maximum Data Rate, Kbit/s	ST	140	-	$R_L = 3 kOhm; C_L = 1000 pF$	25 ± 10
		120			-40÷85
Transition-Region Slew Rate, $V/\mu s$	SR	6	30	$U_{CC} = 3.3 V; R_L = (3-7) kOhm;$ U_{OT} is from +3 to -3 V or from -3 to +3 V; $C_L = (150-1000) pF$	25 ± 10
		4	30		
Propagation delays difference, ns	t_{SKew}	-	600	$U_{CC} = 5.0V \pm 10\%;$ $U_{IL} = 0 V; U_{IH} = 3.0 V;$ $t_{LH} = t_{HL} \leq 10 ns;$ $R = 3 kOhm; C = 1000 pF$	

* U_{V+}, U_{V-} - voltages applied to pins 02, 06.


Note – Electric parameters is indicated for $C1=0.047 \mu F$, $C2-C4 = 0.33 \mu F$ & $U_{CC} = 5.0 V \pm 10\%$
(or $C1-C4 = 0.1 \mu F$ & $U_{CC} = 3.3 V \pm 10\%$)

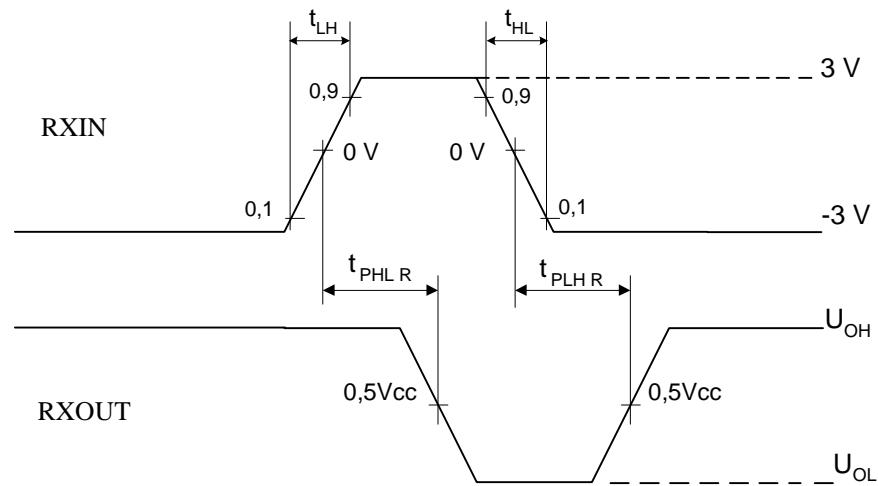

Receiver output & input signals time diagram

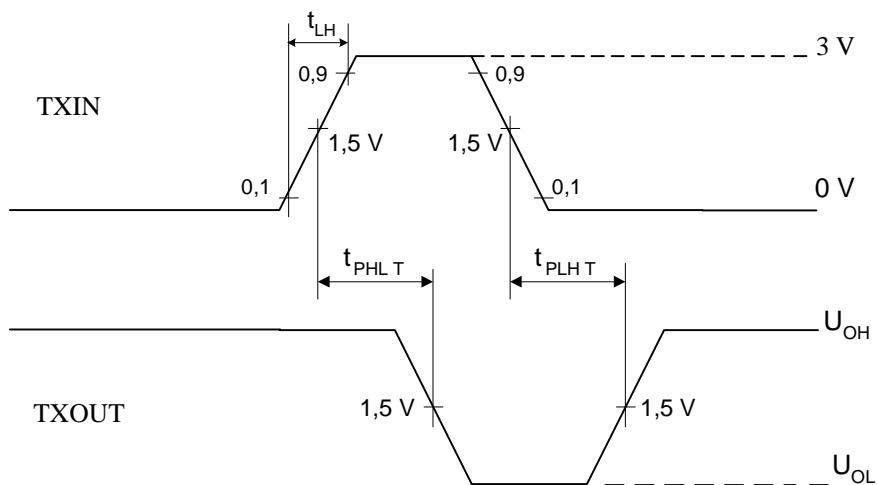

Transmitter output & input signals time diagram

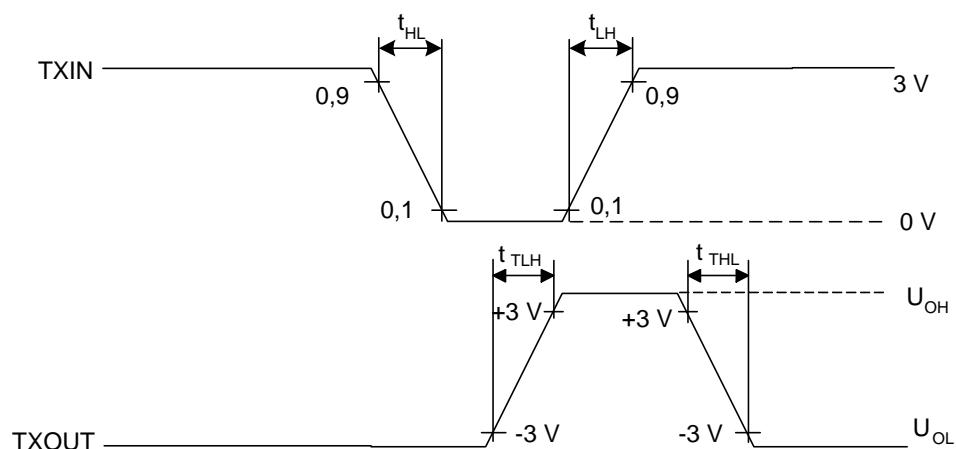


Transmitter output & input signals time diagram



Package Dimensions

DIP16-P-300-2.54A

Unit: mm

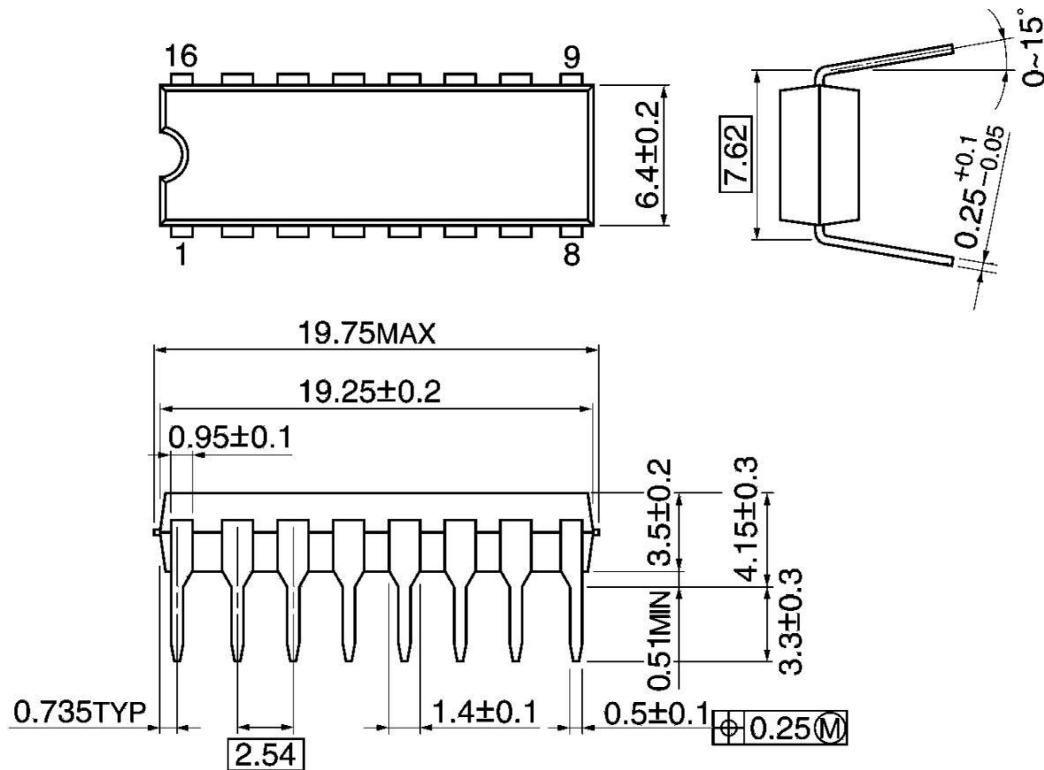


Weight: 1.11 g (Typ.)



SSOP16-P-225-0.65B


Unit: mm

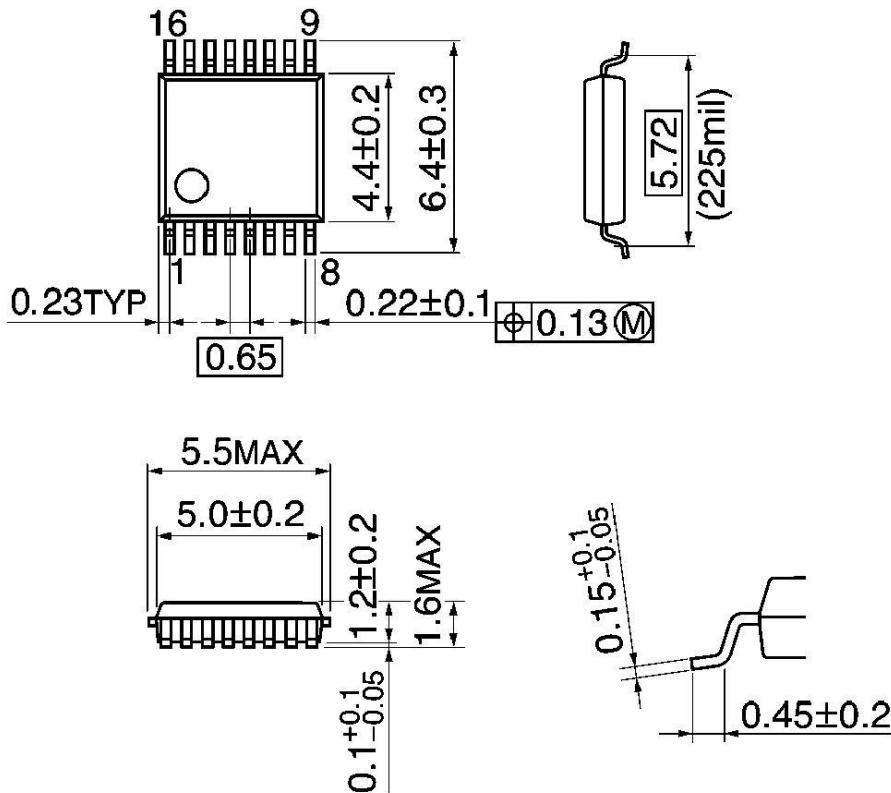

Weight: 0.07 g (Typ.)

P-SOP16-0410-1.27-002

Unit: mm

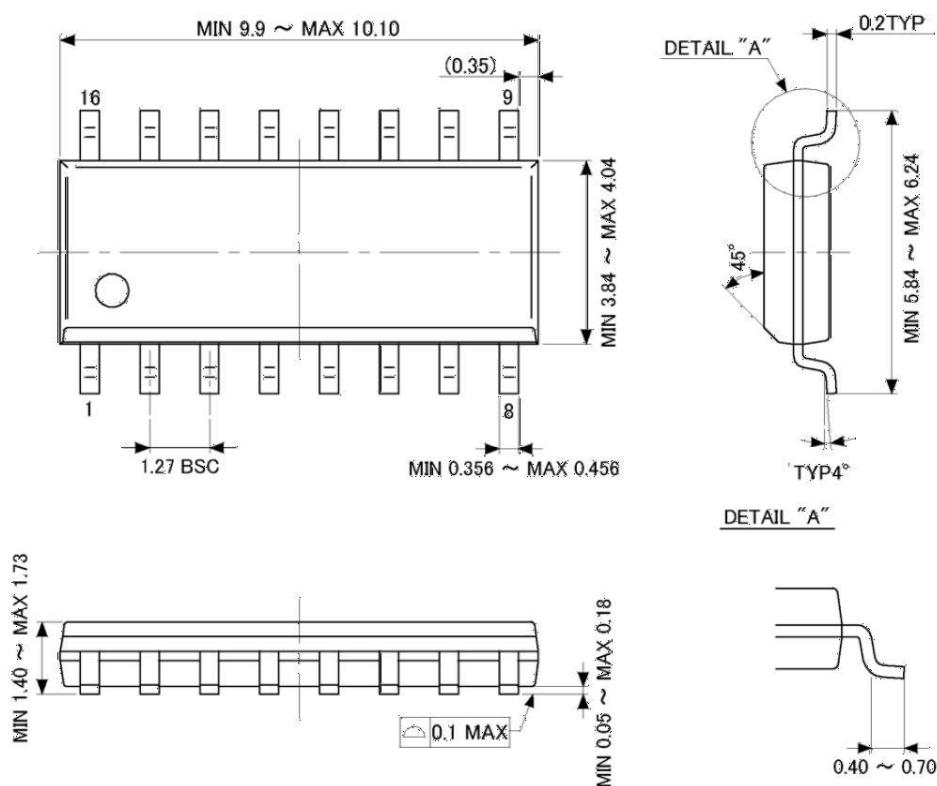

Weight: 0.15 g (Typ.)