


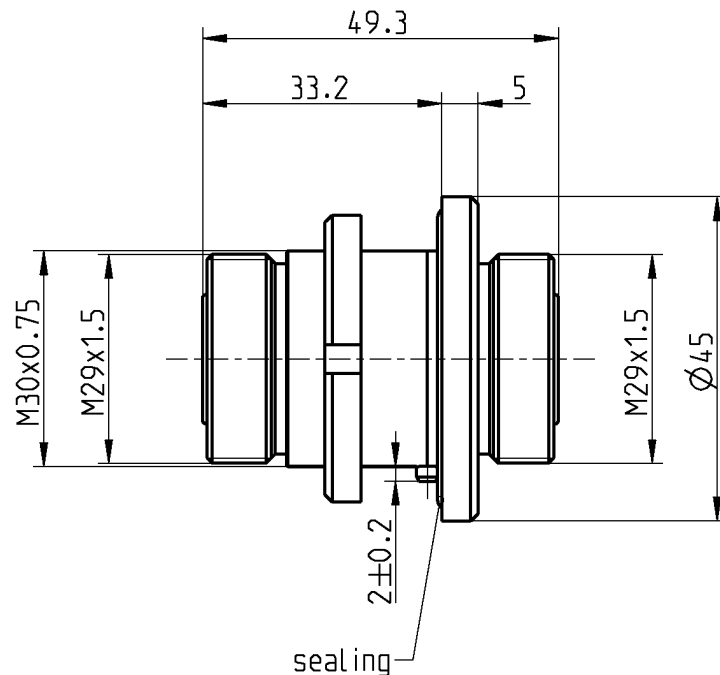

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 60169-4, VG 95250, EN 122190, DIN 47223

Documents

Panel piercing

B 84

Material and plating

Connector parts

Center contact
Outer contact
Body
Dielectric
Gasket

Material

Beryllium copper
Brass
Brass
PP
Silicone

Plating

Silver, 3-6 μm
Flash white bronze over silver(e.g. Optargen®)
Flash white bronze over silver(e.g. Optargen®)

TECHNICAL DATA SHEET

Rosenberger

adaptor
7/16 jack – jack

60K501-K50N1

Electrical data

Impedance	50 Ω
Frequency	DC to 7.5 GHz
Return loss	≥ 40 dB, DC to 2.5 GHz
	≥ 38 dB, 2.5 to 6 GHz
	≥ 28 dB, 6 to 8.3 GHz
Insertion loss	≤ 0.05 dB
Insulation resistance	≥ 10 ⁴ MΩ
Center contact resistance	≤ 0.4 mΩ
Outer contact resistance	≤ 1.5 mΩ
Working voltage (at sea level)	500 V rms, 50 Hz
Power handling (at 20 °C, sea level, VSWR 1.0)	1800 W @ 1 GHz
	800 W @ 4 GHz
RF-leakage	≥ 128 dB up to 1 GHz
Intermodulation (3 rd order)	≤ -117 dBm @ 2 x 20 W

Mechanical data

Mating cycles	min. 500
Center contact captivation: axial	≥ 200 N
radial	≥ 2 Ncm
Coupling torque (recommended)	25 to 30 Nm
Proof torque	max. 35 Nm

Environmental data

Temperature range	-45°C to +85°C
Rapid change of temperature	DIN EN 122190, clause 4.6.7
Corrosion salt mist	DIN EN 122190, clause 4.6.10
Vibration	DIN EN 122190, clause 4.6.3
Damp heat	DIN EN 122190, clause 4.6.6
Climatic tests	DIN EN 122190, clause 4.6.5 (45/85/56)
Degree of protection (mated pair)	IEC 60529, IP68
RoHS	compliant

Tooling

N/A

Suitable cables

N/A

Weight

Weight	231.9 g/pce
--------	-------------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Inge Mühlauer	29/06/04	J_Gramsamer	07.04.15	f00	15-0397	J_Krautenb.	07.04.15

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0
email: info@rosenberger.de

Page
2 / 2