
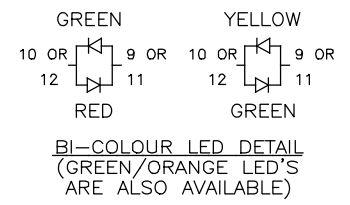
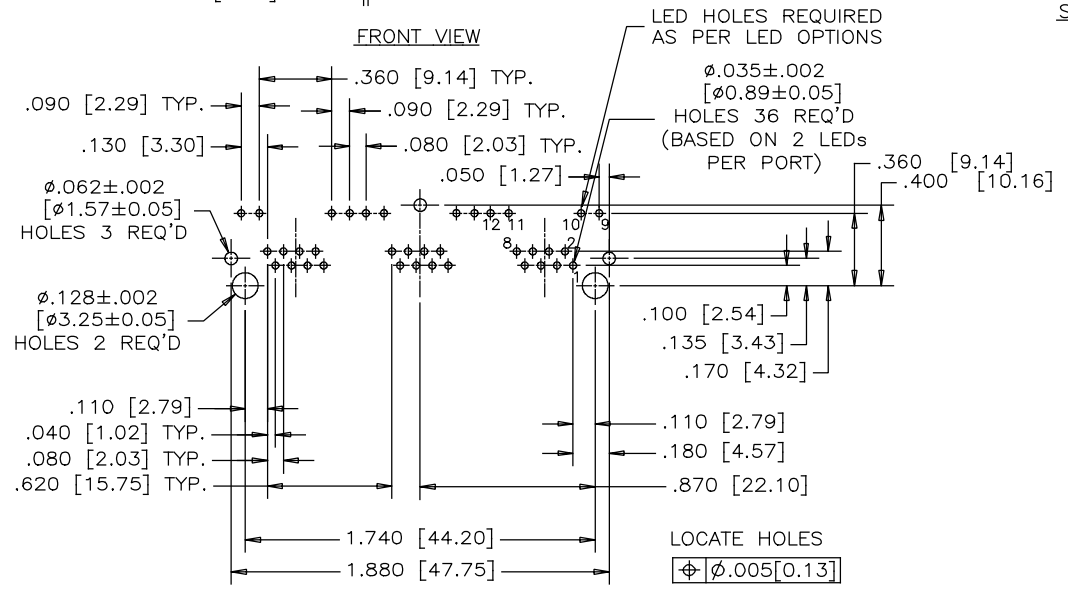
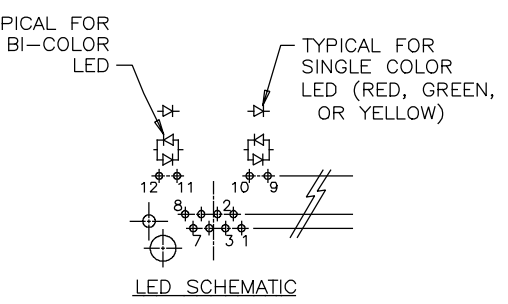
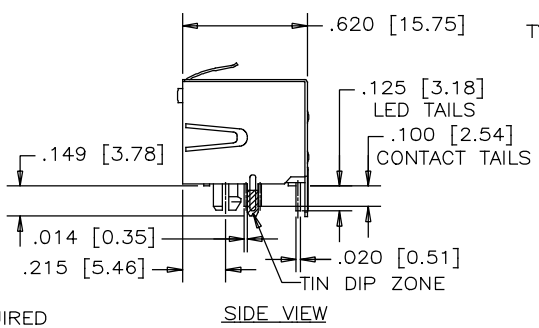


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JAN19/05	K.L.
B	ADD DIMENSIONS	JUN23/14	L.CHAN
C	ADD DIMENSIONS OF LAYOUT	OCT21/14	L.CHAN

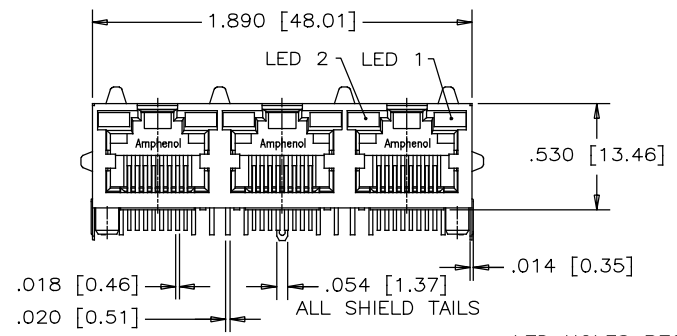

MATERIALS:


PLASTIC HOUSING: HIGH TEMPERATURE ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0, BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: 50 μ " [1.27 MICRONS] MIN.
GOLD ON MATING SURFACES.
50 μ " [1.27 MICRONS] MIN.
NICKEL UNDERPLATE
100 μ " [2.54 MICRONS] MIN.
MATTE TIN ON CONTACT TAILS.

SHIELD: COPPER ALLOY
PLATING: NICKEL

PART NUMBER: RJHSE-538X-03

REFER TO LED OPTIONS DRAWING
FOR ORDERING CODES

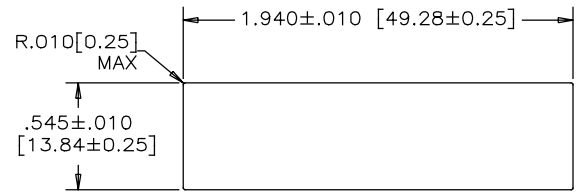

UNLESS SPECIFIED OTHERWISE		DRAWN Frank W	DATE JUN 23/14	Amphenol Canada Corp. www.amphenolcanada.com	
PRIMARY UNITS INCH	CHECKED Lawrence C		JUN 23/14		
SECONDARY MILLIMETERS	M.E. APP'D			TITLE RJHSE SERIES, THREE PORT MODULAR JACK, 8 POSITIONS & 8 CONTACTS PER PORT, SHIELDED, WITH LEDs - RoHS COMPLIANT	
REFERENCE IN PARENTHESES	Q.A. APP'D				
GENERAL TOLERANCES		DWG APPR.		DWG. NO. P-RJHSE-538X-03	
1 DECIMAL PLACE ±0.025	ENG. REL. NO.				
2 DECIMAL PLACES ±0.020	REF.			REV C	
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION				
ANGULAR DEGREES ±1.0°	DO NOT SCALE DRAWING			CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1	