




## Connectors 160/163

### 160 BU/ 8 natural

Socket, 8 pole, natural, Voltage Rating: 400 V, Cross-Section: 2.5 mm<sup>2</sup>

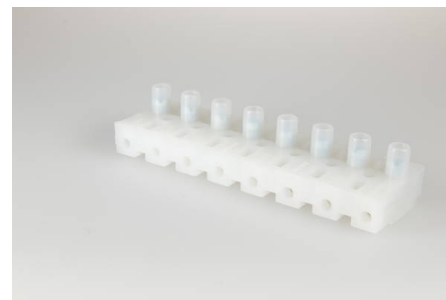

#### Order Info

<b>Reference Number (ref. no.)</b>	151468
<b>Applications</b>	Lighting, Installation, Transformers, Electronics
<b>PU</b>	200
<b>EAN</b>	4028012135257

#### Type

<b>Type</b>	Socket
<b>Number of poles</b>	8 pole
<b>Clamping Units per Pole</b>	1
<b>Colour</b>	natural
<b>Cross-Section</b>	2.5 mm <sup>2</sup>
<b>Connection Type</b>	Screw

#### Technical Data

<b>Voltage Rating</b>	400 V
<b>Current Rating</b>	16 A
<b>Insulating Material</b>	PA 6
<b>Contact Material</b>	Brass
<b>Core Cross-Section min.</b>	0.5 mm <sup>2</sup>
<b>Core Cross-Section max.</b>	4.0 mm <sup>2</sup>
<b>Impulse Voltage Rating</b>	4.0 kV
<b>Flammability Rating</b>	V-2
<b>max. Ambient Temperature Operation</b>	70 °C
<b>Type of Conductor Solid</b>	yes
<b>Type of Conductor Flexible</b>	yes
<b>Type of Conductor Stranded</b>	yes
<b>Stripping Length</b>	6.5-7.0 mm
<b>Assembly Contact Screw</b>	0.6x3.5 / ⌀ 0.5 Nm