



Fast Recovery Epitaxial Diode

Reverse Voltage - 1200 Volts
Forward Current - 60 Amperes

Features

- Ultrafast recovery time
- Soft recovery characteristics
- Low Forward Voltage
- High surge capacity
- Low Leakage Current

Mechanical Data


- Case: JEDEC TO-247AC molded plastic
- Polarity: As marked on the body
- Mounting position: Any

Note: Products with logo  or  are made by HY Electronic (Cayman) Limited.

Applications

- Welding machine
- Power Supply
- Ultrasonic Cleaner

TO-247AC

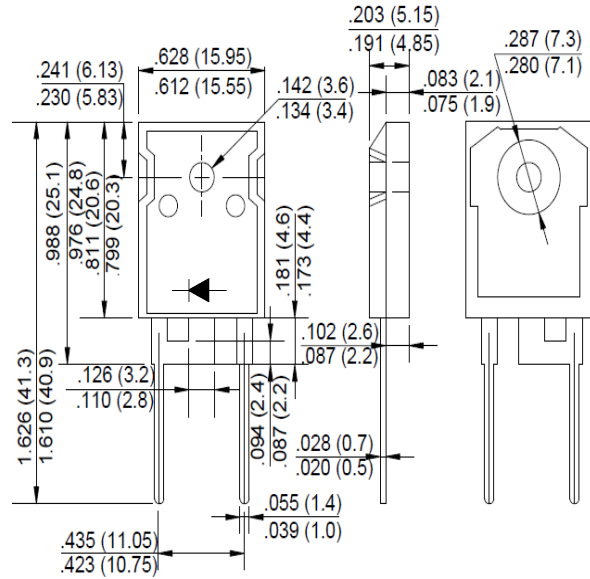

RoHS COMPLIANT

Package Outline Dimensions in Inches (Millimeters)

Absolute Maximum Ratings

Rating at 25°C ambient temperature unless otherwise specified.

Parameter	Test Conditions	Symbol	HYD60A12EP	Unit
Marking			D60A12EP	
Maximum Repetitive Reverse Voltage		V_{RM}	1200	V
Average Forward Current	$T_C=110^\circ\text{C}$	$I_{F(AV)}$	60	A
RMS Forward Current	$T_C=110^\circ\text{C}$	$I_{F(RMS)}$	82	A
Non-Repetitive Surge Forward Current	$t_p=10\text{ms}$, 50Hz, Half Sine Wave	I_{FSM}	500	A
Maximum Power Dissipation		P_D	312	W
Operating Junction Temperature Range		T_J	-55 to +150	°C
Storage Temperature Range		T_{STG}	-55 to +150	°C
Thermal Resistance	Junction-to-Case	$R_{\theta JC}$	0.4	°C/W
Mounting Torque		T_{orque}	1.1	Nt. m

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Unit
Reverse Leakage Current	$V_R=1200\text{V}$	I_{RM}	-	-	500	μA
	$V_R=1200\text{V}$, $T_J=125^\circ\text{C}$		-	-	5	μA
Forward Voltage	$I_F=60\text{A}$	V_F	-	2.5	3.2	V
	$I_F=60\text{A}$, $T_J=125^\circ\text{C}$		-	-	2.9	V
Reverse Recovery Time	$I_F=1\text{A}$, $V_R=30\text{V}$, $di_F/dt=-200\text{A}/\mu\text{s}$	T_{RR}	-	65	-	nS
Reverse Recovery Time	$V_R=600\text{V}$, $I_F=60\text{A}$	T_{RR}	-	138	-	nS
Peak Recovery Current	$di_F/dt=-200\text{A}/\mu\text{s}$, $T_J=25^\circ\text{C}$	I_{RRM}	-	6.5	-	A
Reverse Recovery Time	$V_R=600\text{V}$, $I_F=60\text{A}$	T_{RR}	-	420	-	nS
Peak Recovery Current	$di_F/dt=-200\text{A}/\mu\text{s}$, $T_J=125^\circ\text{C}$	I_{RRM}	-	12.8	-	A



Fig. 1 - Typical Forward Voltage Drop Characteristics

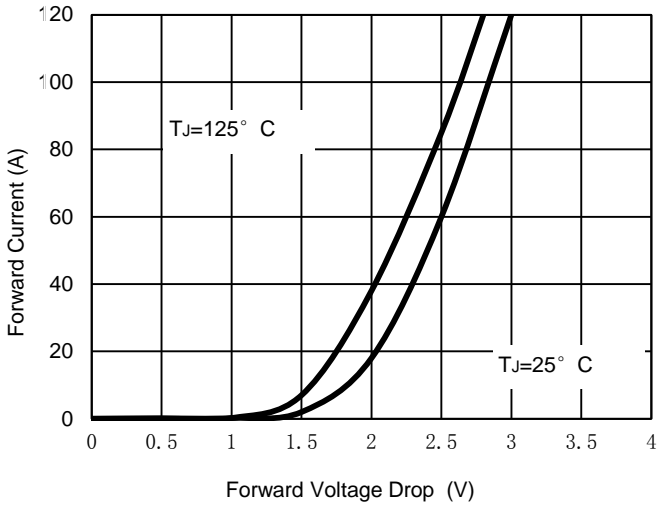


Fig. 2 - Typical Value of Reverse Characteristics

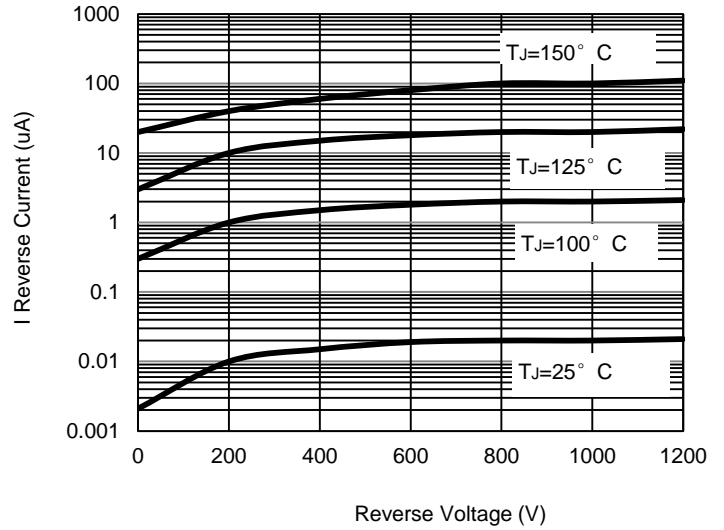


Fig. 3 - Typical Junction Capacitance


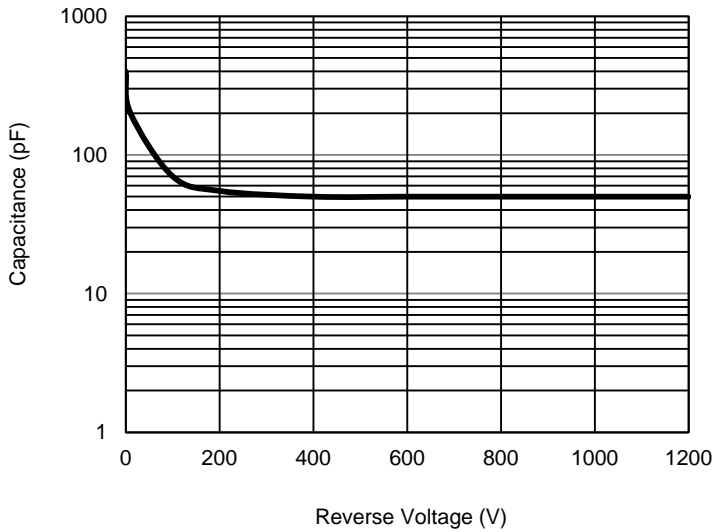


Fig. 4 - Average Forward Current Derating Curve



The curve above is for reference only.

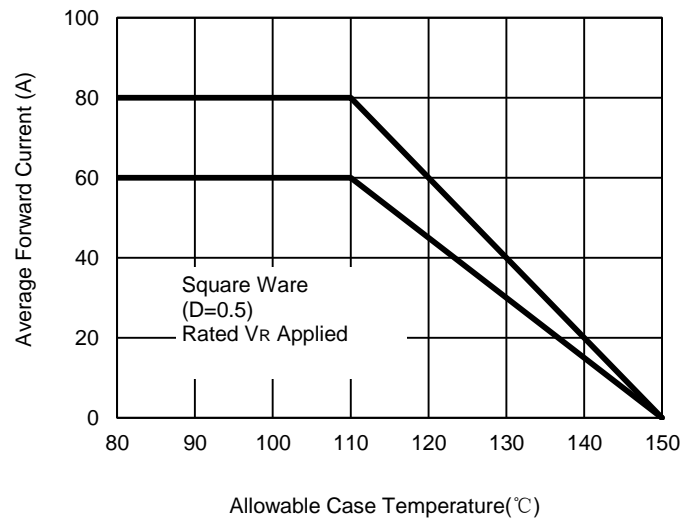

Disclaimer

ALL specifications and data are subject to be changed without notice to improve reliability function or design or other reasons.

HY makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, HY disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on HY's knowledge of typical requirements that are often placed on HY products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify HY's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, HY products are not designed for use in medical, life-saving, or life-sustaining applications or for any other applications in which the failure of the HY product could result in personal injury or death. Customers using or selling HY products not expressly indicated for use in such applications do so at their own risk. Please contact authorized HY personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of HY. Product names and markings noted herein may be trademarks of their respective owners.