

7MBP300RA060

IGBT-IPM R series

600V / 300A 7 in one-package

Features

- Temperature protection provided by directly detecting the junction temperature of the IGBTs
- Low power loss and soft switching
- High performance and high reliability IGBT with overheating protection
- Higher reliability because of a big decrease in number of parts in built-in control circuit

Maximum ratings and characteristics

- Absolute maximum ratings(at $T_c=25^{\circ}\text{C}$ unless otherwise specified)

Item			Symbol	Rating		Unit
				Min.	Max.	
DC bus voltage			V_{DC}	0	450	V
DC bus voltage (surge)			$V_{DC(surge)}$	0	500	V
DC bus voltage (short operating)			V_{SC}	200	400	V
Collector-Emitter voltage			V_{CES}	0	600	V
DB Reverse voltage			V_R	-	600	V
INV	Collector current	DC	I_C	-	300	A
		1ms	I_{CP}	-	600	A
		Duty=55.5%	$-I_C$	-	300	A
	Collector power dissipation	One transistor	P_C	-	1040	W
DB	Collector current	DC	I_C	-	100	A
		1ms	I_{CP}	-	200	A
	Forward current of Diode		I_F	-	100	A
	Collector power dissipation	One transistor	P_C	-	400	W
Junction temperature			T_j	-	150	$^{\circ}\text{C}$
Input voltage of power supply for Pre-Driver			V_{CC}^{*1}	0	20	V
Input signal voltage			V_{in}^{*2}	0	V_Z	V
Input signal current			I_{in}	-	1	mA
Alarm signal voltage			V_{ALM}^{*3}	0	V_{CC}	V
Alarm signal current			I_{ALM}^{*4}	-	15	mA
Storage temperature			T_{stg}	-40	125	$^{\circ}\text{C}$
Operating case temperature			T_{op}	-20	100	$^{\circ}\text{C}$
Isolating voltage (Case-Terminal)			V_{iso}^{*5}	-	AC2.5	kV
Screw torque	Mounting (M5)			-	3.5 *6	N·m
	Terminal (M5)			-	3.5 *6	N·m

*1 Apply V_{CC} between terminal No. 3 and 1, 6 and 4, 9 and 7, 11 and 10.

*2 Apply V_{in} between terminal No. 2 and 1, 5 and 4, 8 and 7, 12,13,14,15 and 10.

*3 Apply V_{ALM} between terminal No. 16 and 10.

*4 Apply I_{ALM} to terminal No. 16.

*5 50Hz/60Hz sine wave 1 minute.

*6 Recommendable Value : 2.5 to 3.0 N·m

Electrical characteristics of power circuit (at $T_c=T_j=25^{\circ}\text{C}$, $V_{CC}=15\text{V}$)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
INV	Collector current at off signal input	I_{CES}	$V_{CE}=600\text{V}$ input terminal open	—	—	1.0	mA
	Collector-Emitter saturation voltage	$V_{CE(sat)}$	$I_C=300\text{A}$	—	—	2.8	V
	Forward voltage of FWD	V_F	$-I_C=300\text{A}$	—	—	3.0	V
DB	Collector current at off signal input	I_{CES}	$V_{CE}=600\text{V}$ input terminal open	—	—	1.0	mA
	Collector-Emitter saturation voltage	$V_{CE(sat)}$	$I_C=100\text{A}$	—	—	2.8	V
	Forward voltage of Diode	V_F	$-I_C=100\text{A}$	—	—	3.0	V

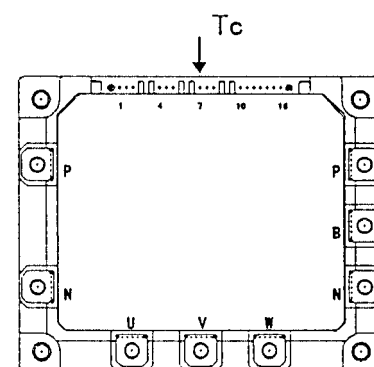
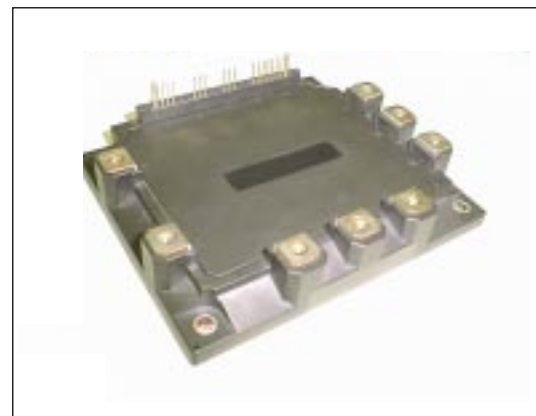


Fig.1 Measurement of case temperature

● Electrical characteristics of control circuit(at $T_c=T_j=25^\circ\text{C}$, $V_{cc}=15\text{V}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Power supply current of P-line side Pre-driver(one unit)	I_{ccp}	$f_{sw}=0$ to 15kHz $T_c=-20$ to 100°C *7	6	-	32	mA
Power supply current of N-line side three Pre-driver	I_{ccn}	$f_{sw}=0$ to 15kHz $T_c=-20$ to 100°C *7	24	-	114	mA
Input signal threshold voltage (on/off)	$V_{in(th)}$	ON	1.00	1.35	1.70	V
		OFF	1.70	2.05	2.40	V
Input zener voltage	V_Z	$R_{in}=20\text{k ohm}$	-	8.0	-	V
Over heating protection temperature level	T_{COH}	$V_{DC}=0\text{V}$, $I_c=0\text{A}$, Case temperature, Fig.1	110	-	125	$^\circ\text{C}$
Hysteresis	T_{CH}		-	20	-	$^\circ\text{C}$
IGBT chips over heating protection temperature level	T_{JOH}	surface of IGBT chips	150	-	-	$^\circ\text{C}$
Hysteresis	T_{JH}		-	20	-	$^\circ\text{C}$
Collector current protection level	INV	I_{oc} $T_j=125^\circ\text{C}$	450	-	-	A
	DB	I_{oc} $T_j=125^\circ\text{C}$	150	-	-	A
Over current protection delay time (Fig.2)	t_{DOC}	$T_j=25^\circ\text{C}$ Fig.2	-	10	-	μs
Under voltage protection level	V_{UV}		11.0	-	12.5	V
Hysteresis	V_H		0.2	-	-	V
Alarm signal hold time	t_{ALM}		1.5	2	-	ms
SC protection delay time	t_{SC}	$T_j=25^\circ\text{C}$ Fig.3	-	-	12	μs
Limiting resistor for alarm	R_{ALM}		1425	1500	1575	ohm

*7 Switching frequency of IPM

● Dynamic characteristics(at $T_c=T_j=125^\circ\text{C}$, $V_{cc}=15\text{V}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Switching time (IGBT)	t_{on}	$I_C=300\text{A}$, $V_{DC}=300\text{V}$	0.3	-	-	μs
	t_{off}		-	-	3.6	μs
Switching time (FWD)	t_{rr}	$I_F=300\text{A}$, $V_{DC}=300\text{V}$	-	-	0.4	μs

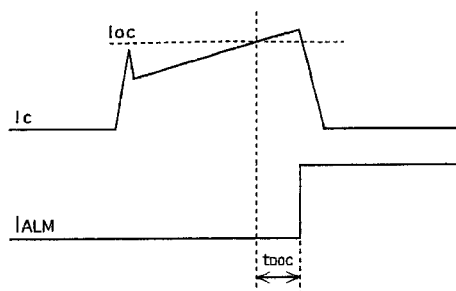


Fig.2 Definition of OC delay time

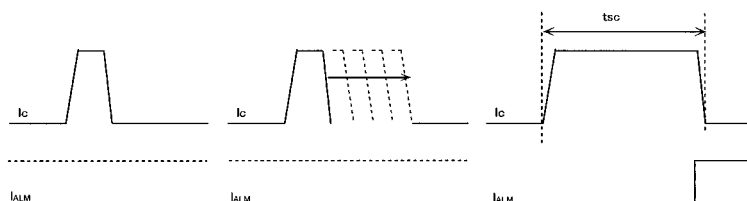


Fig.3 Definition of t_{sc}

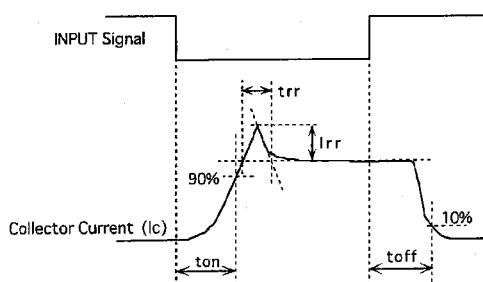


Fig.4 Definition of switching time


● Thermal characteristics($T_c=25^\circ\text{C}$)

Item			Symbol	Typ.	Max.	Unit
Junction to Case thermal resistance	INV	IGBT	Rth(j-c)	-	0.12	°C/W
		FWD	Rth(j-c)	-	0.25	°C/W
	DB	IGBT	Rth(j-c)	-	0.31	°C/W
Case to fin thermal resistance with compound			Rth(c-f)	0.05	-	°C/W

● Recommendable value

Item		Symbol	Min.	Typ.	Max.	Unit
DC bus voltage		V _{DC}	200	-	400	V
Operating power supply voltage range of Pre-driver		V _{CC}	13.5	15	16.5	V
Switching frequency of IPM		f _{sw}	1	-	20	kHz
Screw torque	Mounting (M5)	-	2.5	-	3.0	N·m
	Terminal (M5)	-	2.5	-	3.0	N·m


Block diagram

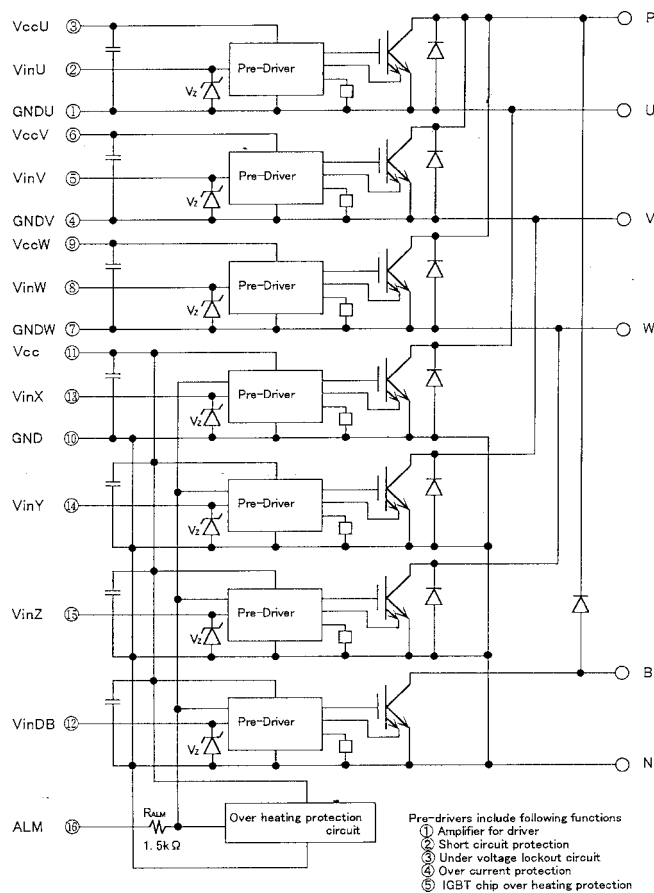

Pre-drivers include following functions

- Amplifier for driver
- Short circuit protection
- Undervoltage lockout circuit
- Over current protection
- IGBT chip over heating protection

Outline drawings, mm

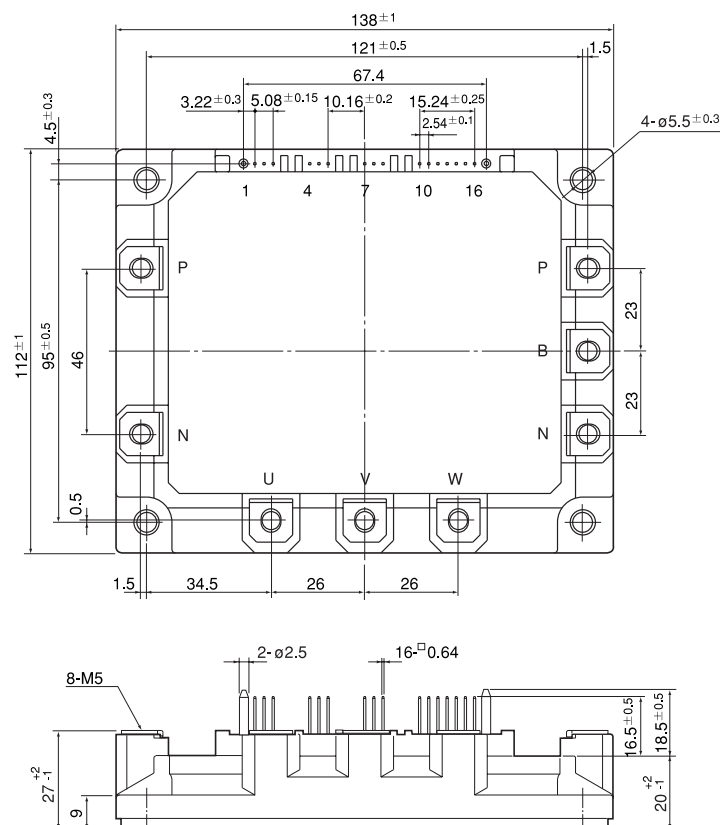


Mass : 920g


Characteristics (Representative)

Control circuit


Power supply current vs. Switching frequency
Tj=100°C

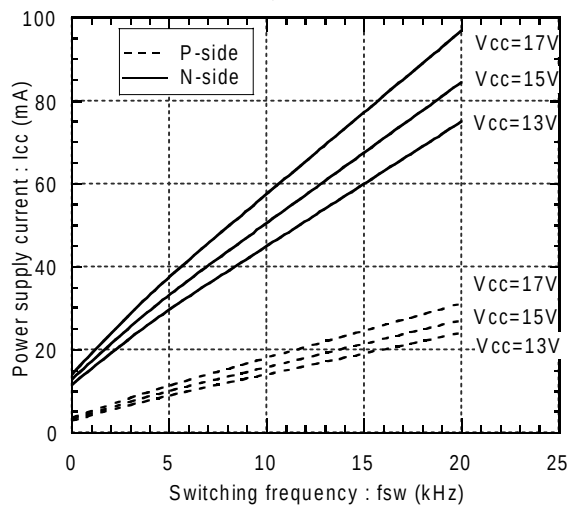


Input signal threshold voltage
vs. Power supply voltage

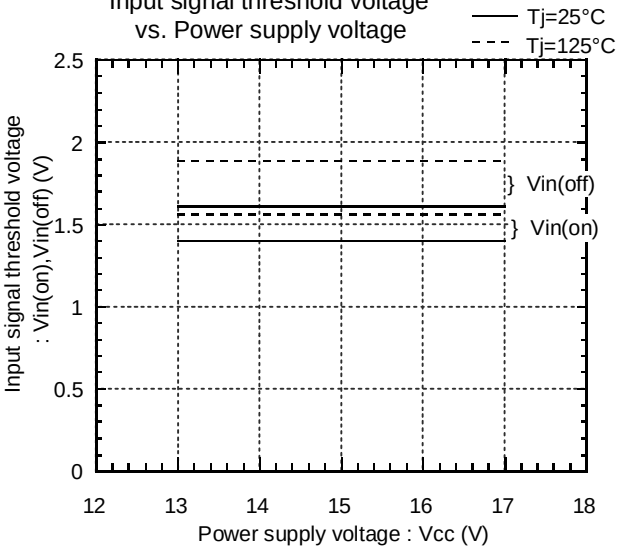


Under voltage vs. Junction temperature

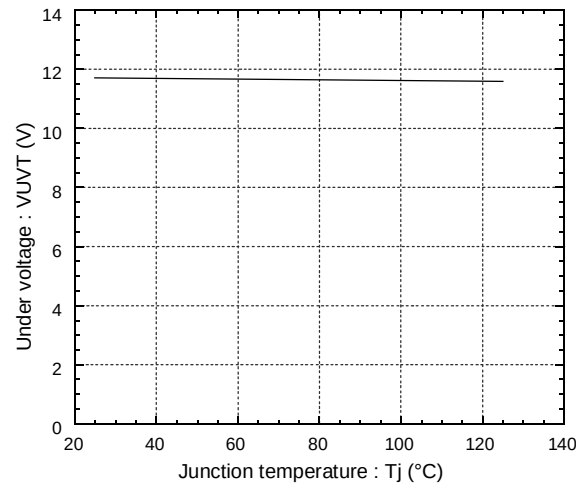


Under voltage hysteresis vs. Jnction temperature

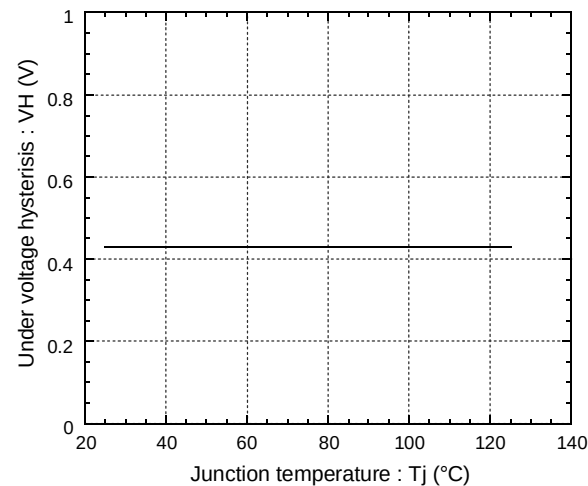

Alarm hold time vs. Power supply voltage

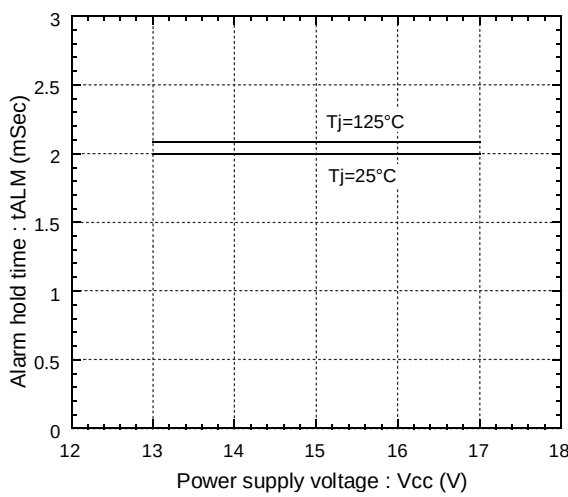


Over heating characteristics
TcOH, TjOH, TcH, TjH vs. Vcc

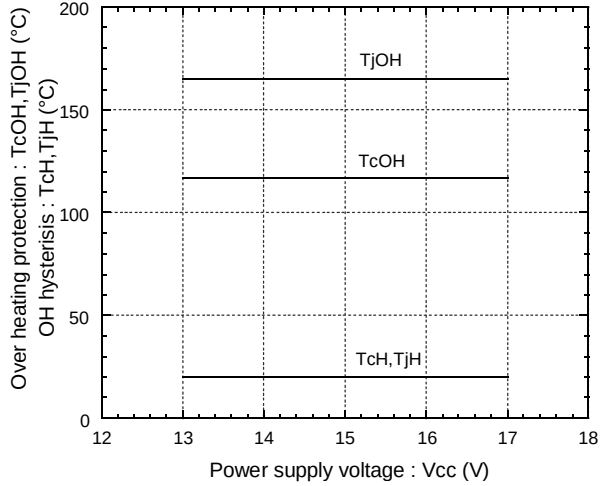


● Inverter


Collector current vs. Collector-Emitter voltage
 $T_j=25^{\circ}\text{C}$

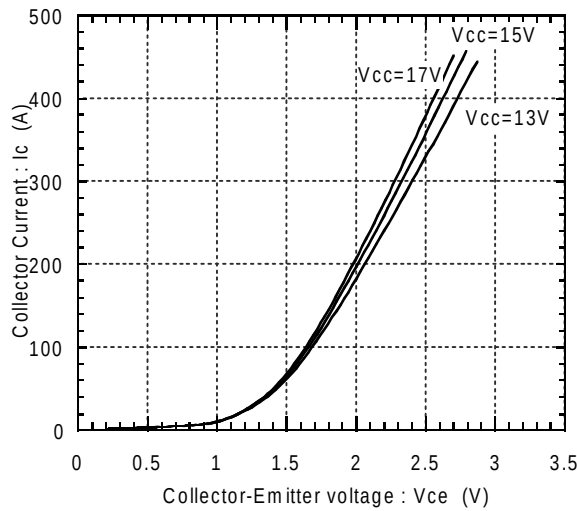


Collector current vs. Collector-Emitter voltage
 $T_j=125^{\circ}\text{C}$

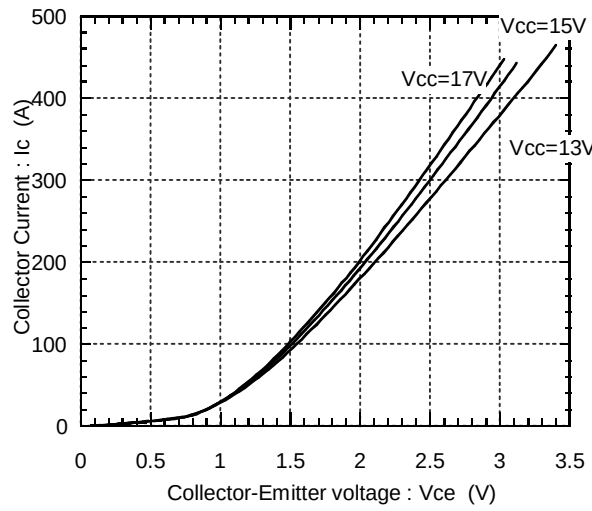


Switching time vs. Collector current
 $E_{dc}=300\text{V}, V_{cc}=15\text{V}, T_j=25^{\circ}\text{C}$

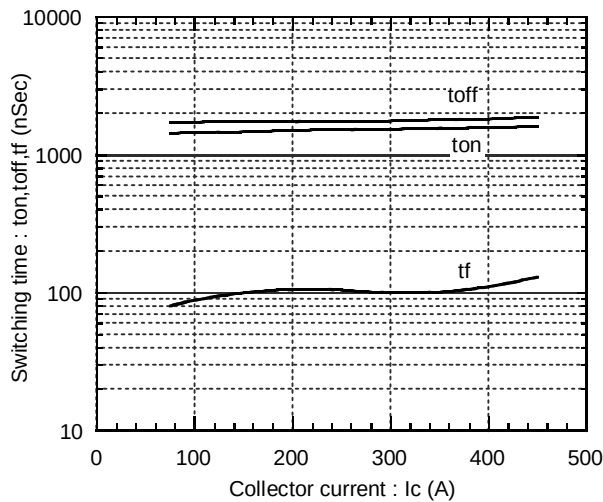


Switching time vs. Collector current
 $E_{dc}=300\text{V}, V_{cc}=15\text{V}, T_j=125^{\circ}\text{C}$






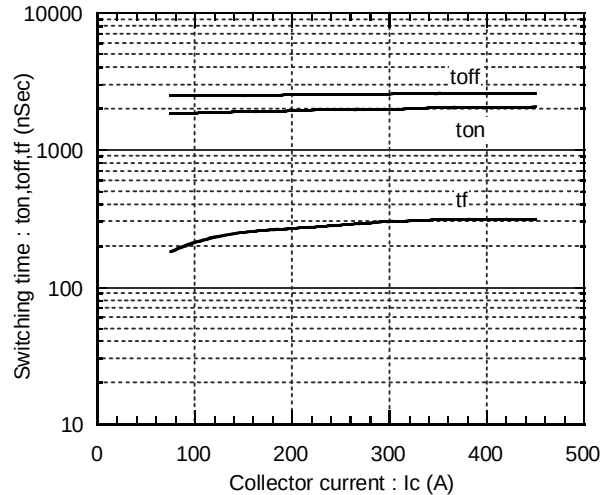



Forward current vs. Forward voltage

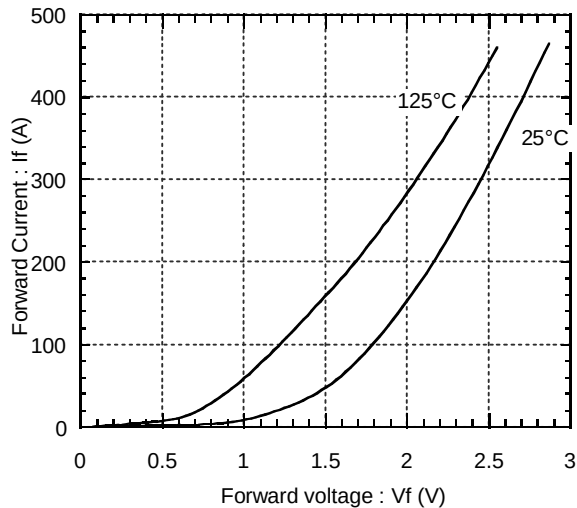

Reverse recovery characteristics
 t_{rr}, I_{rr} vs. I_F

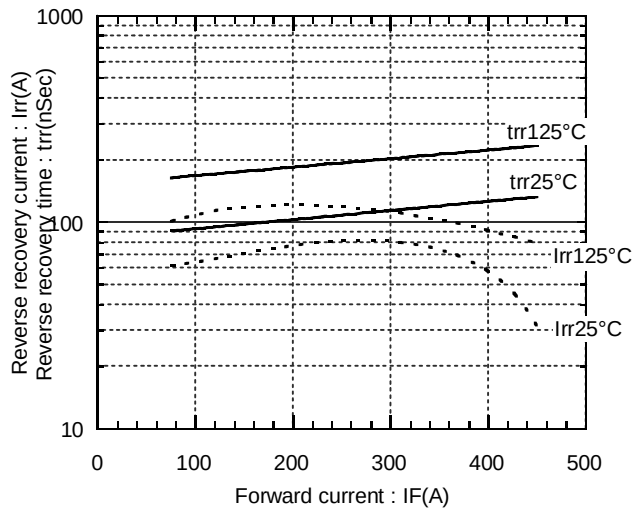


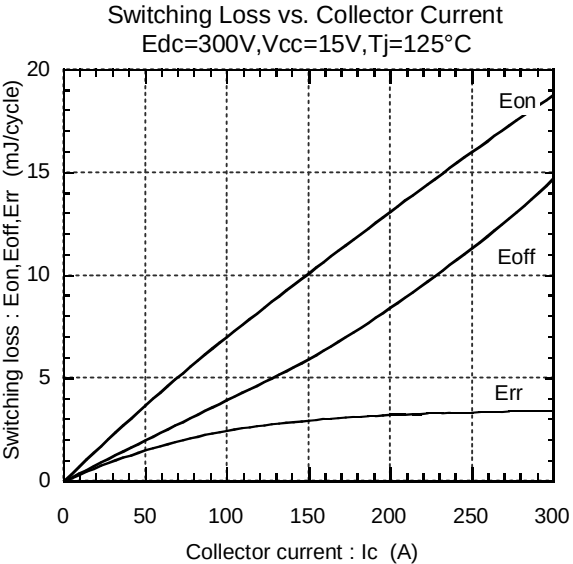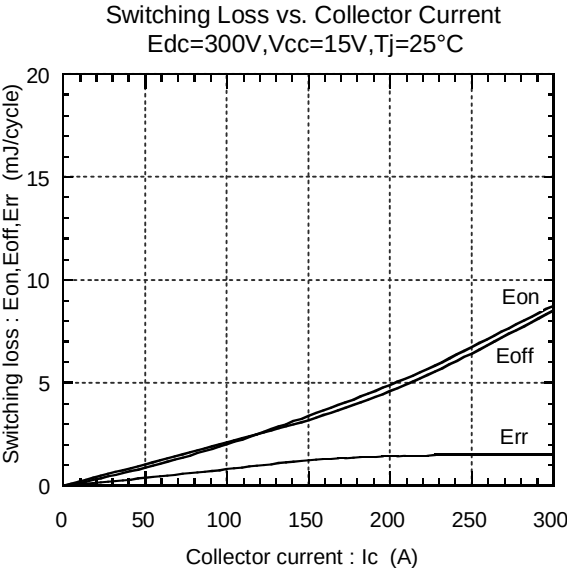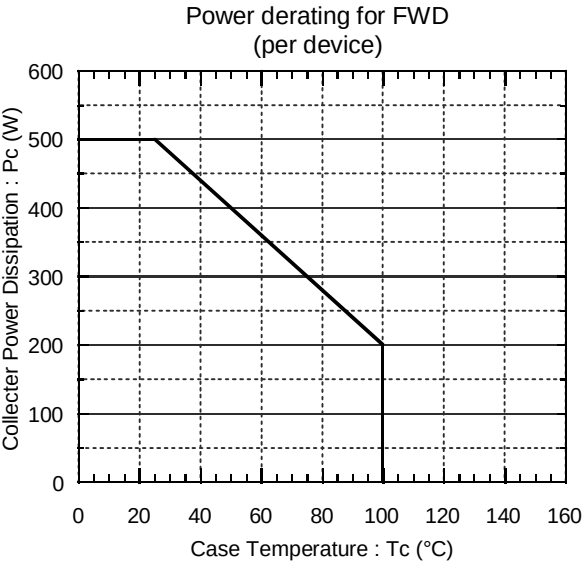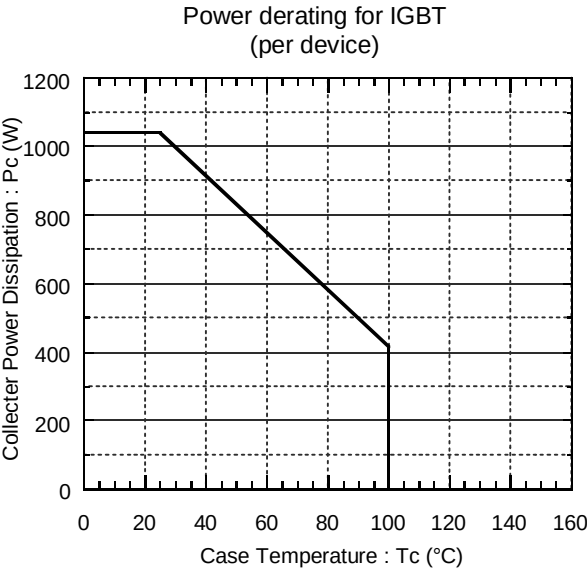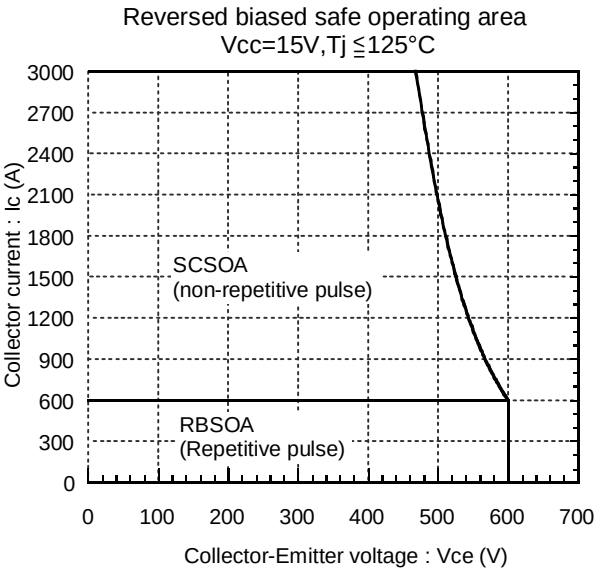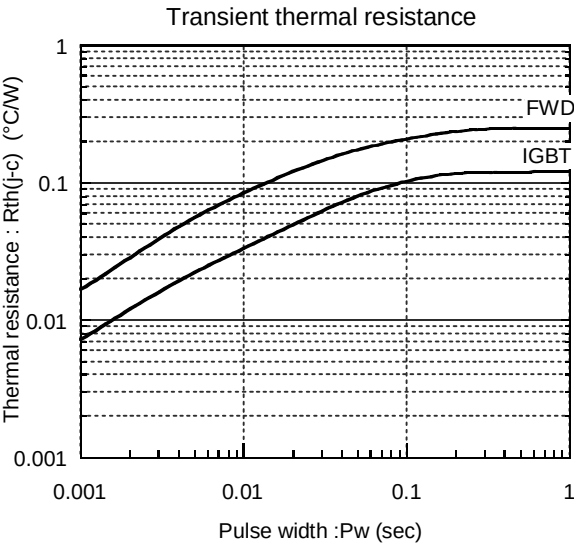

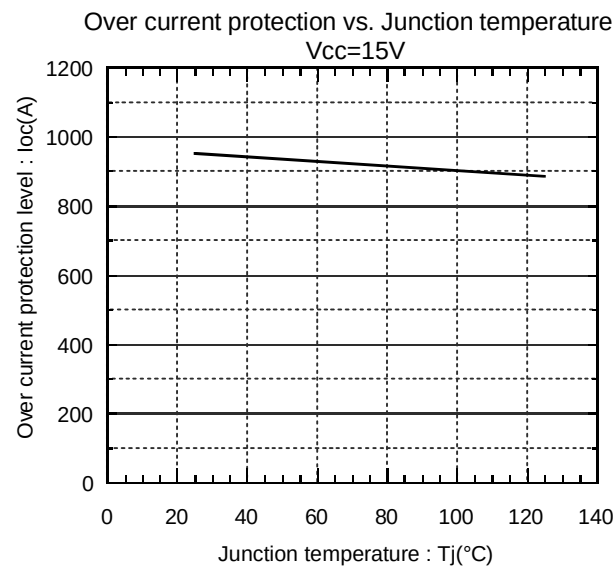


● Brake


Collector current vs. Collector-Emitter voltage
 $T_j=25^{\circ}\text{C}$

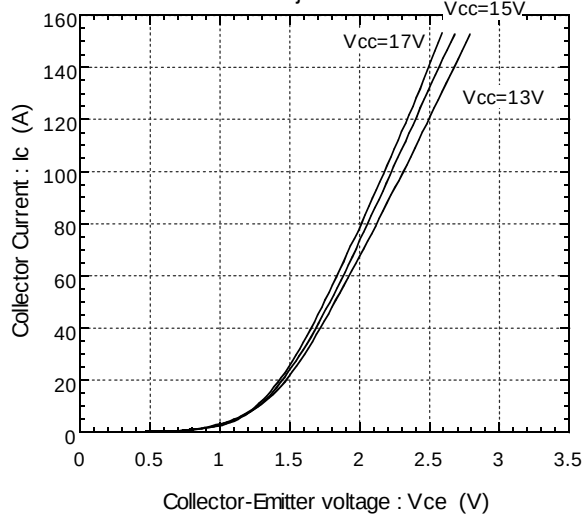


Collector current vs. Collector-Emitter voltage
 $T_j=125^{\circ}\text{C}$

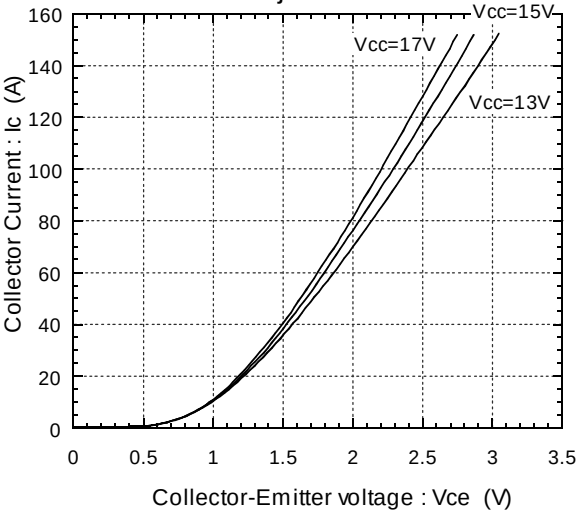


Transient thermal resistance

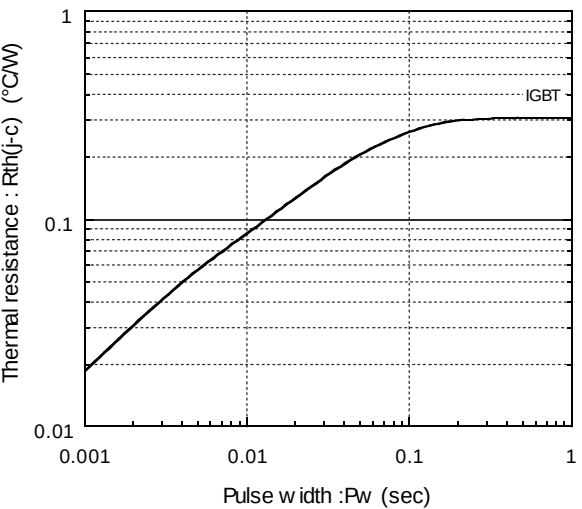

Reversed biased safe operating area
 $V_{cc}=15\text{V}, T_j \leq 125^{\circ}\text{C}$

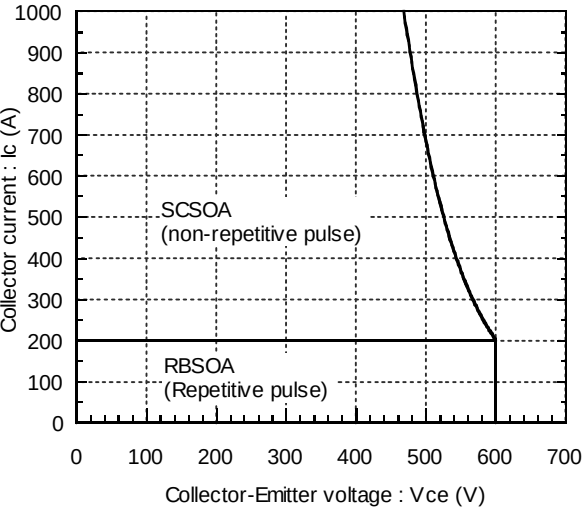

Power derating for IGBT
(per device)

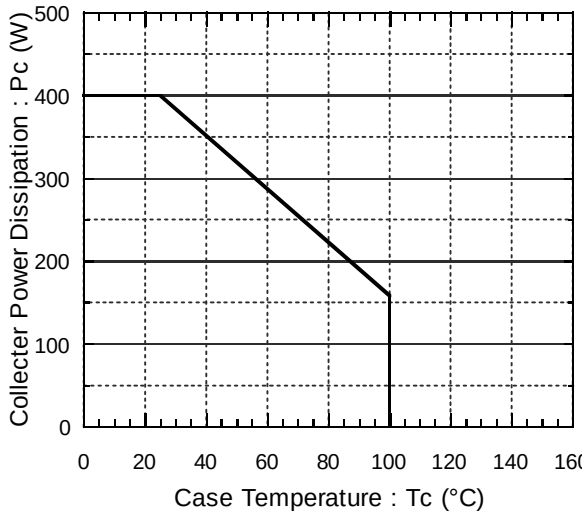

Over current protection vs. Junction temperature
 $V_{cc}=15\text{V}$

