

Surface Mount Directional Coupler

JDC-20-3-75+ JDC-20-3-75

75Ω 2 to 250 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Outline Drawing

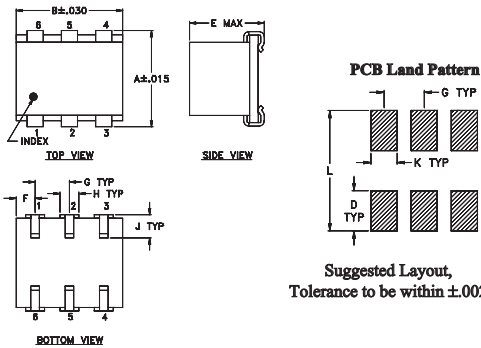


Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-33 Suggested PCB Layout (PL-044)

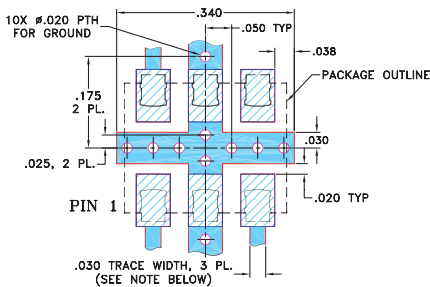

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low mainline loss, 0.3 dB typ.
- high directivity, 30 dB typ.
- excellent solderability

Applications

- communications
- level detecting
- signal sampling
- reflective power measurements

Directional Coupler Electrical Specifications




FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
			L		M		U		L		M		U				
	Nom.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.		Typ.	Max.
2-250	19.2±0.5	±0.5	0.4	0.8	0.3	0.7	0.4	0.7	24	16	30	20	20	15	1.1	0.5	1.0

L = 2-20 MHz M = 20-125 MHz U = 125-250 MHz


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
1.00	0.44	19.22	23.26	23.55	24.40	23.02
4.00	0.30	19.23	29.11	28.64	31.07	28.66
7.00	0.28	19.24	30.46	29.97	33.28	30.26
10.00	0.28	19.24	31.30	30.50	34.28	30.94
50.00	0.30	19.26	30.27	31.34	33.32	32.19
90.00	0.32	19.28	27.59	31.42	30.68	33.55
130.00	0.35	19.32	25.09	30.66	28.22	35.94
150.00	0.37	19.35	23.75	29.92	26.97	37.80
180.00	0.40	19.38	22.06	28.50	25.21	41.60
250.00	0.46	19.45	18.52	25.22	21.84	37.78

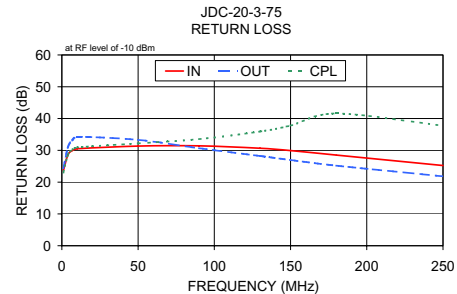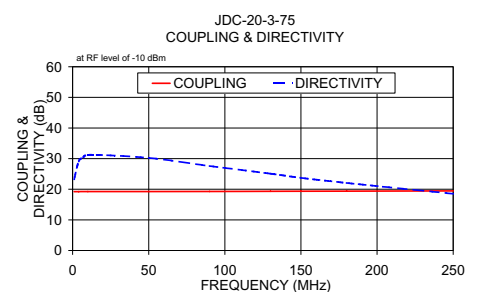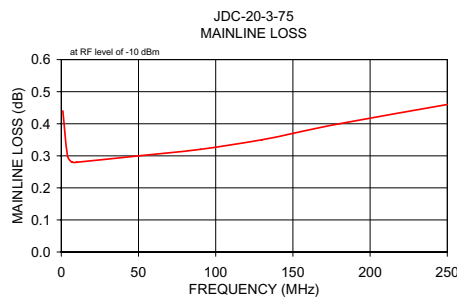

Electrical Schematic

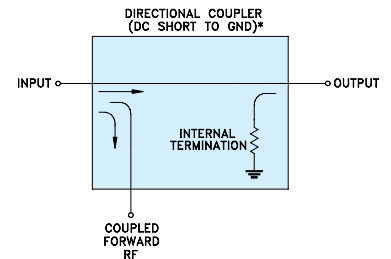

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. C
M119986
ED-5581
JDC-20-3-75
WZ/TD/CP/AM
081111